

7 to 12GHz –Dual Junction Coaxial Circulator

Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

RF Characteristics

Model Number	Freq. Range (GHz)	Insertion Loss (1-2) Max(dB)	Isolation (2-1) Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYCDC269A74T77SF	7.4 ~ 7.7	0.6	45	1.2	60	60	SMA-F	-40 ~ +85
UIYCDC269A79T85SM	7.9 ~ 8.5	0.6	45	1.2	60	60	SMA-M	-40 ~ +85
UIYCDC269A8T10SF	8.0 ~ 10.0	0.7	40	1.25	60	60	SMA-F	-40 ~ +85
UIYCDC269A8T12SF	8.0 ~ 12.0	1.0	36	1.3	60	60	SMA-F	-40 ~ +85
UIYCDC269A8T12SMTSF	8.0 ~ 12.0	1.0	36	1.3	60	60	SMA-M to SMA-F	-40 ~ +85
UIYCDC269A10T11SF	10.0 ~ 11.0	0.6	45	1.2	60	60	SMA-F	-40 ~ +85
UIYCDC269A10T12SF	10.0 ~ 12.0	0.8	40	1.25	60	60	SMA-F	-40 ~ +85

² List are specify frequency range and other ranges available.

² Please enter below information when inquiry and mark * is must.


* 1. The specific frequency range

* 2. Power handling (Forward, Reverse, Peak, etc.)

* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)

* 4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

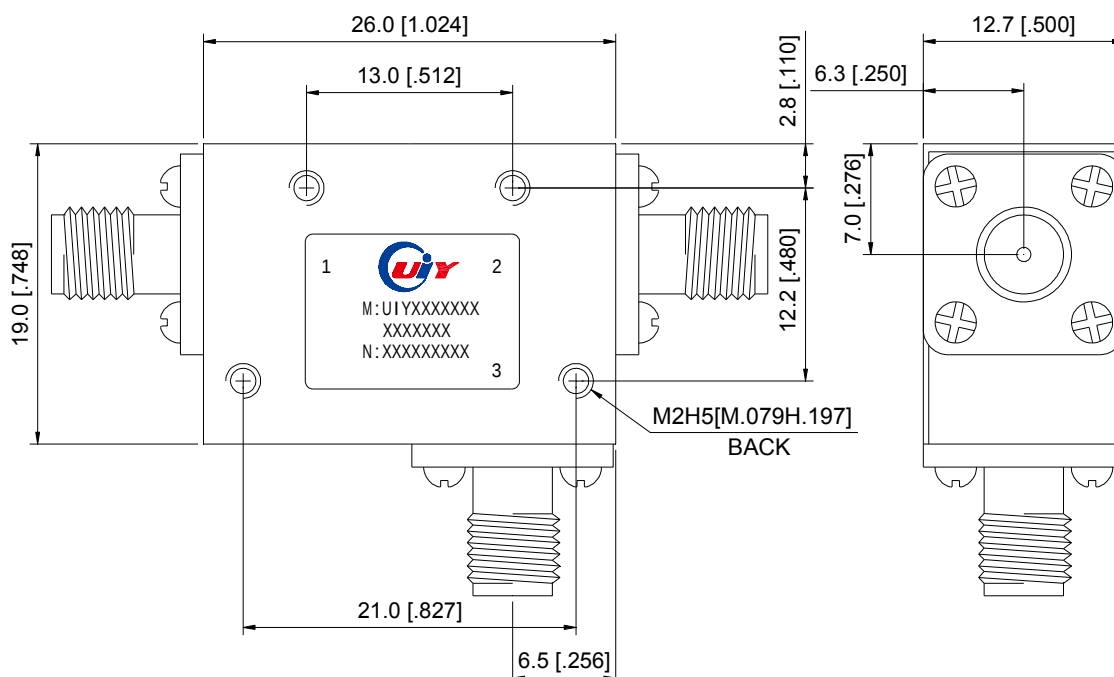

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

Ver. 5

A2-5G, Zhujiang Plaza, Longxiang Blvd, Longgang District, Shenzhen 518172, China.

Tel: +86-755-25999990 25999909 Fax: +86-755-25999959 E-mail: sales@uiy.com Web: www.uiy.com