
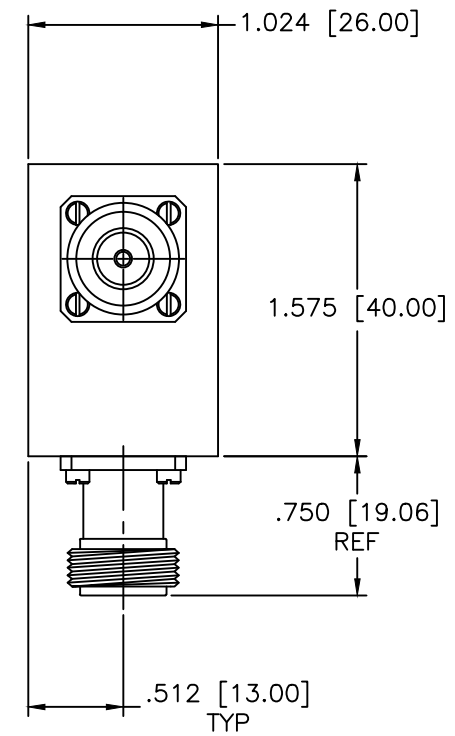


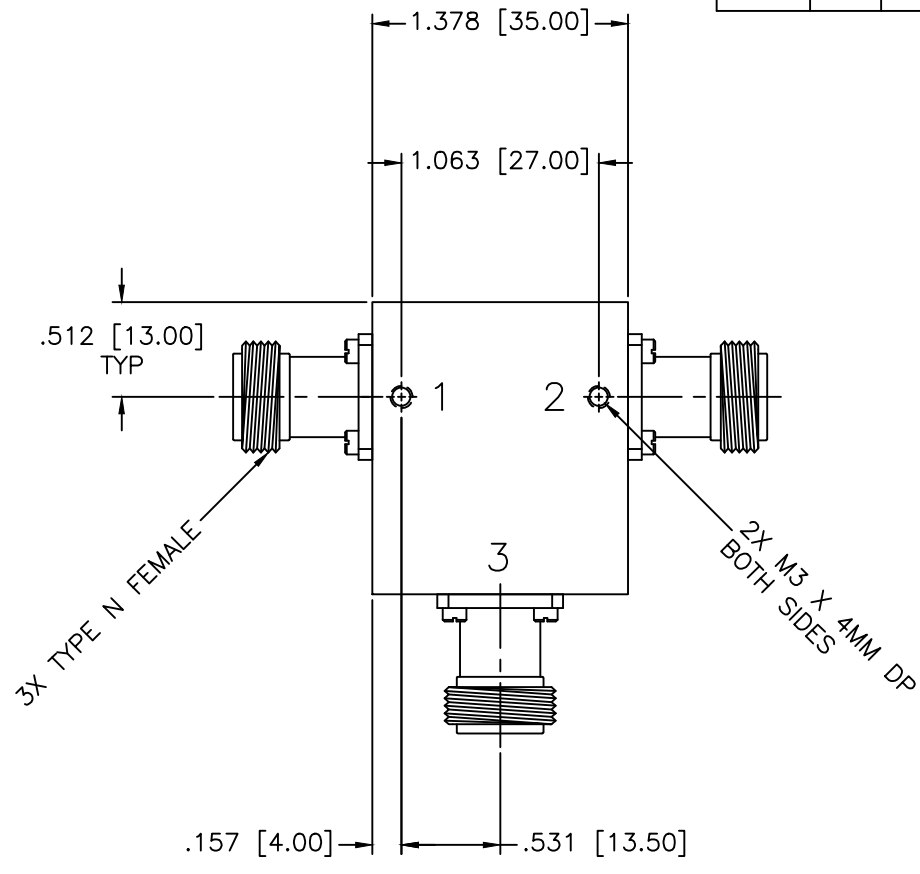

SPECIFICATIONS

Frequency Range: 890–950 MHz
 VSWR: 1.25:1 Max.
 Average Power: 200 Watts
 Insertion Loss: 0.30dB Max.
 Isolation: 20dB Min.
 Operating Temperature: –30°C to +70°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 02-10-2012		DRAWING TITLE: COAXIAL CIRCULATOR	
APPROVED: T. Nguyen		DATE: 10-06-2011		PART NO. CS-184/NF	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: 0D2L5		SIZE: A DO NOT SCALE THE DRAWING	REV: N/A DWG NO. 85998