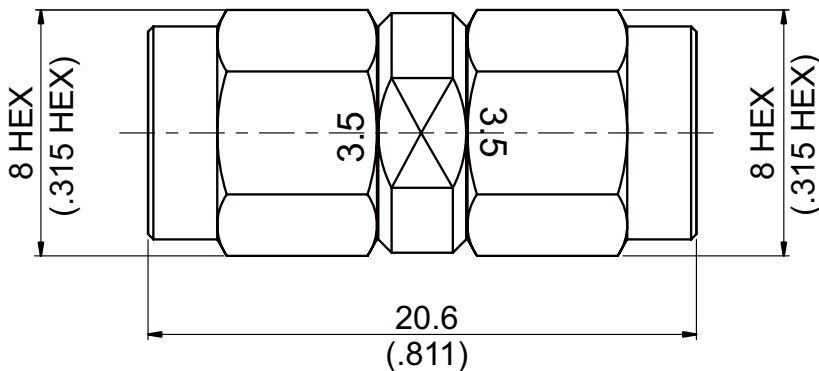


AD-PC3PC3	3.5 Plug To 3.5 Plug	50Ω																								
																										
NOTE: White Dot Indicates 3.5 Interface. Typical VSWR <table><tr><td>Part Number</td><td>1~2 GHz</td><td>3 GHz</td><td>4~11 GHz</td><td>12~21 GHz</td></tr><tr><td rowspan="3">AD-PC3PC3</td><td>1.2</td><td>1.05</td><td>1.07</td><td>1.10</td></tr><tr><td>22~35 GHz</td><td>36 GHz</td><td>37 GHz</td><td>38~40 GHz</td></tr><tr><td>1.13</td><td>1.19</td><td>1.26</td><td>1.27</td></tr></table>			Part Number	1~2 GHz	3 GHz	4~11 GHz	12~21 GHz	AD-PC3PC3	1.2	1.05	1.07	1.10	22~35 GHz	36 GHz	37 GHz	38~40 GHz	1.13	1.19	1.26	1.27						
Part Number	1~2 GHz	3 GHz	4~11 GHz	12~21 GHz																						
AD-PC3PC3	1.2	1.05	1.07	1.10																						
	22~35 GHz	36 GHz	37 GHz	38~40 GHz																						
	1.13	1.19	1.26	1.27																						
<table><tr><th>Parts</th><th>Material</th><th>Plating (Micro-inch)</th></tr><tr><td>Retainer Ring</td><td>Beryllium Copper</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Gasket</td><td>Silicon</td><td></td></tr><tr><td>Contact Pin</td><td>Beryllium Copper</td><td>Gold 20 Over Nickel 50 Over Copper 50</td></tr><tr><td>Insulator</td><td>PPO</td><td></td></tr><tr><td>Contact Body</td><td>Stainless Steel</td><td>Passivated</td></tr><tr><td>Body</td><td>Stainless Steel</td><td>Passivated</td></tr><tr><td>Coupling Nut</td><td>Stainless Steel</td><td>Passivated</td></tr></table>	Parts	Material	Plating (Micro-inch)	Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gasket	Silicon		Contact Pin	Beryllium Copper	Gold 20 Over Nickel 50 Over Copper 50	Insulator	PPO		Contact Body	Stainless Steel	Passivated	Body	Stainless Steel	Passivated	Coupling Nut	Stainless Steel	Passivated		
Parts	Material	Plating (Micro-inch)																								
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50																								
Gasket	Silicon																									
Contact Pin	Beryllium Copper	Gold 20 Over Nickel 50 Over Copper 50																								
Insulator	PPO																									
Contact Body	Stainless Steel	Passivated																								
Body	Stainless Steel	Passivated																								
Coupling Nut	Stainless Steel	Passivated																								
Weight: 5.49 g																										

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.