

AMP3041 SOLID STATE HIGH POWER AMPLIFIER

FEATURES

Class AB linear GaN design
Instantaneous wide bandwidth
Suitable for all modulations standards
Small form factor & light weight
Built-in protection circuits
High reliability and ruggedness



ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	4.4 - 5.5 GHz	
Power Output	50 Watt Min	CW
Power Output @ P1dB	40 Watt Min.	CW
Power Output OFDM	10 Watt Min	7 dB Peak to Average
Power Gain	47 dB Min	
Power Gain Flatness	1.5 dB p-p Max	Constant input power
Input / Output Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	>30 dBc Typ	40 dBm/Tone, $\Delta = 1$ MHz
Harmonics	>30 dBc Typ	At rated Pout
Non Harmonics Spurious	>60 dBc	
Operating Voltage	28 -30 VDC	
Current Consumption	10 Amp Max	At rated Pout
Max Input Power	+8 dBm	Without damage
Load VSWR Protection	$\infty : 1$	
Turn On / Off Speed	5 μ Sec Max	

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +75 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non Condensing

MECHANICAL SPECIFICATIONS


Parameter	Specification	Notes
Dimensions	285 x 106 x 27 mm	Excluding Connectors
Weight	0.95 Kg.	
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	9-Pin D-Sub	
Cooling	External Heatsink	Forced air required

AMP3041 SOLID STATE HIGH POWER AMPLIFIER

D-SUB CONNECTOR PIN ASSIGNMENT

Pin	Function	Description
1	FWD	OPTION 101 - Forward power detect
2	VVA	OPTION 103 - Variable Voltage Attenuator
3	CURRENT SENSOR	$I_D @ 20\text{mV}/100\text{mA Typ}$
4	TEMP SENSOR	$V_T @ 10\text{mV}/^\circ\text{C} + 500\text{mV Typ}$
5	SHUTDOWN	TTL
6, 7	VDD	28VDC
8, 9	GND	Ground

OUTLINE DRAWING - OPTION 101

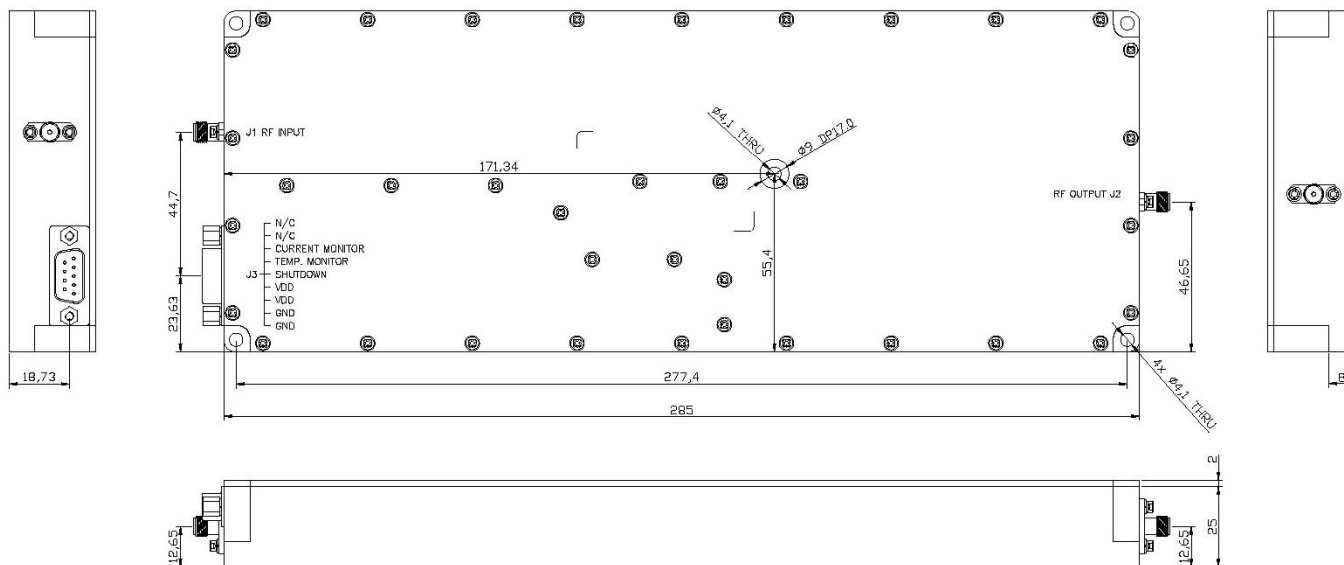

OPTION ORDERING INFORMATION:

OPTION	Function	Description
101	FWD	Forward power detect
103	VVA	Variable Voltage Attenuator