



600 W For integration



Standards
NF C 96-315
MIL-DTL-39030



Impedance	50 $\Omega \pm 5\%$
Frequency	DC - 1.5 GHz
Max VSWR	≤ 1.10 at 1.5 GHz
Temperature range	-55 to +150°C
Average power @ 120°C*	600 W
Peak power	40 kW
Weight	2.9 kg

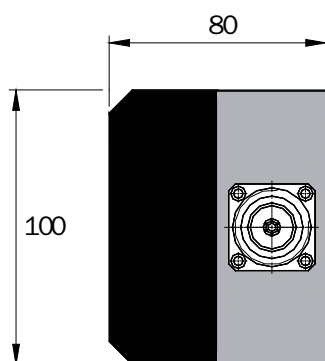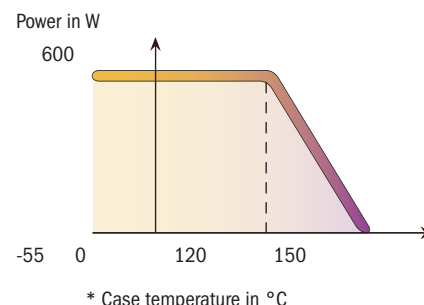

Dimensions in mm

P/N	Connector
17-0430	7-16 f

others connectors on request