

SMA BIAS T 100 KHZ-18 GHZ 700 MA PIN

SB18000A

SPECIFICATIONS


ELECTRICAL

FREQUENCY: 100 KHZ- 18 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.60:1 MAX
INSERTION LOSS: 2.0 DB MAX
ISOLATION: 40 DB MIN
VOLTAGE: 50 VDC MAX
CURRENT: 700 MA MAX
MAXIMUM RF POWER HANDLING: 5 WATTS


MECHANICAL

MATERIAL CONNECTORS: PASSIVATED STAINLESS STEEL
MATERIAL CONTACTS: Au PLATED BeCu MIL-G-4520A
CONNECTOR INTERFACE: MIL-STD-553
TEMPERATURE RANGE: -55°C to +120°C

ROHS COMPLIANT

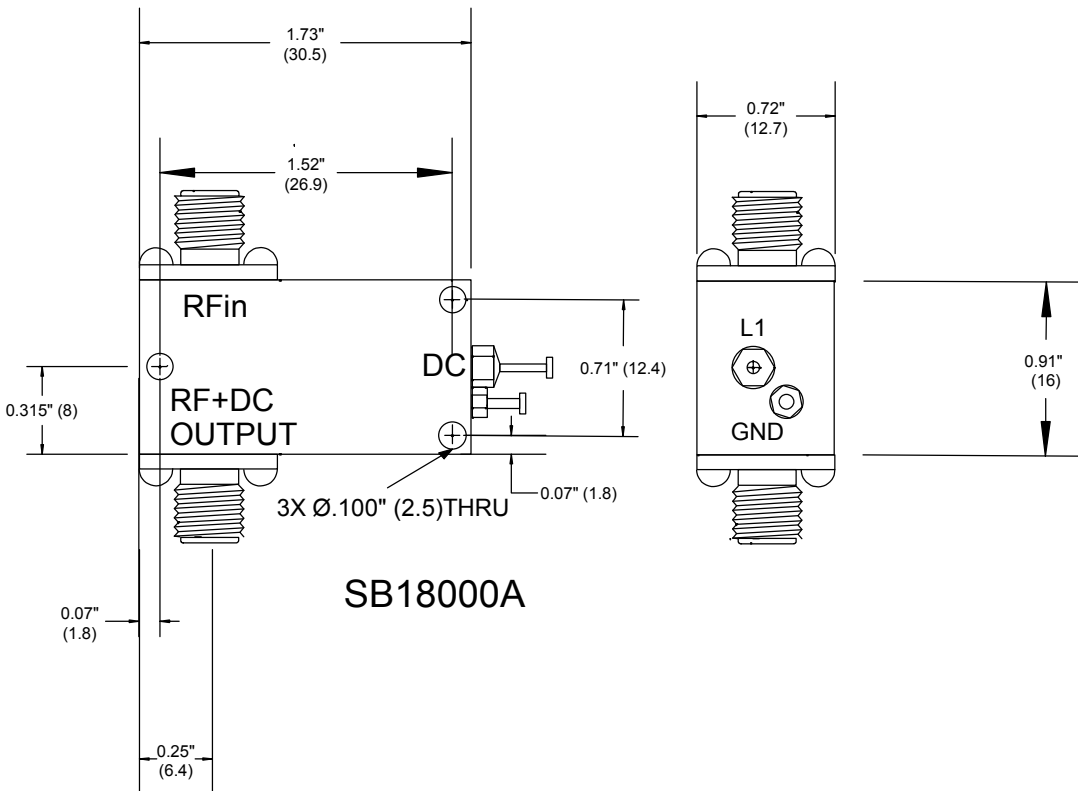

MEASUREMENTS BELOW ARE TYPICAL

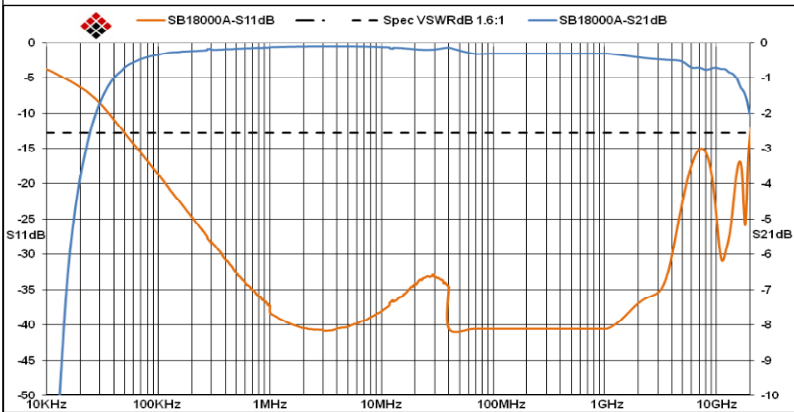

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA BIAS T 100 KHZ-18 GHZ 700 MA PIN

SIZE

A

CAGE CODE

3FKR5

DWG NO

SB18000A

REV

A

SCALE

SHEET

ALL DIMENSIONS IN inches(MM) Typical