


Wideband Amplifier

ZHL-132LM-75+

75Ω 40 to 1300 MHz



Case Style: S860

The Big Deal

- Ultra low second harmonic, very high output IP2, 75 dBm typ.
- Excellent output IP3, 43 dBm typ.
- Output power at 1 dB compression, +24 dBm typ.
- Very low cost, \$79.95 (qty. 1)

Product Overview

The ZHL-132LM-75+ is a high-performance, push-pull amplifier featuring very low second-and third-order distortion products across its 40-1300 MHz bandwidth. Designed for a 6V/256 mA typ. power supply, with F connectors in/out, it's a high-value, low-cost solution providing a 14-dB gain for CATV, instrumentation, and many other applications at VHF, UHF, and lower L-band frequencies. The rugged, aluminum alloy case measures 3.75 x 2.0 x 0.80" high.

Feature	Advantages
Ultra low second harmonic, -80 dBc typ. at 5 dBm output	Exceptionally low second order harmonic distortion
Very high output IP2, 85 dBm typ	Very high linearity across full bandwidth
Excellent output IP3, 43 dBm typ	Excellent suppression of unwanted intermods in the presence of multi carriers
Output power 24 dBm typ	Appropriate signal strength for CATV forward path, instrumentation, broadcasting, and GSM/EDGE/CDMA/UMTS/LTE systems at 7-900 MHz.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Wideband Amplifier

ZHL-132LM-75+

75Ω

40 to 1300 MHz

Features

- Ultra low second harmonic, -80 dBc typ. at 5 dBm output
- Very high output IP2, 75 dBm typ.
- Excellent output IP3, 43 dBm typ.
- Output power, 24 dBm.

Applications

- CATV
- Instrumentation



Case Style: S860

Connectors	Model
F-Female	ZHL-132LM-75-F+

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min	Typ.	Max.	Units
Frequency Range		40		1300	MHz
Gain	40	13.3	16.0	—	dB
	700	13.0	14.4	—	
	1000	12.6	13.9	—	
	1300	11.0	13.0	—	
Output Power at 1dB compression	40	23.0	25.3	—	dBm
	700	22.6	24.5	—	
	1000	22.0	24.1	—	
	1300	22.0	24.5	—	
Output third order intercept point IP3*	40	—	43.2	—	dBm
	700	—	45.5	—	
	1000	—	48.0	—	
	1300	—	42.3	—	
Output second order intercept point IP2*	40	—	77	—	dBm
	700	—	71	—	
	1000	—	72	—	
	1300	—	78	—	
Noise Figure	40-1300	—	3.5	5	dB
Input VSWR	40-1300	—	1.3	—	:1
Output VSWR	40-1300	—	1.3	—	:1
DC Supply Voltage	40-1300	—	6.0	6.5	V
Supply Current	40-1300	220	300	360	mA

*Two tones, spaced 1 MHz apart, 5 dBm/line at output.

Outline Drawing

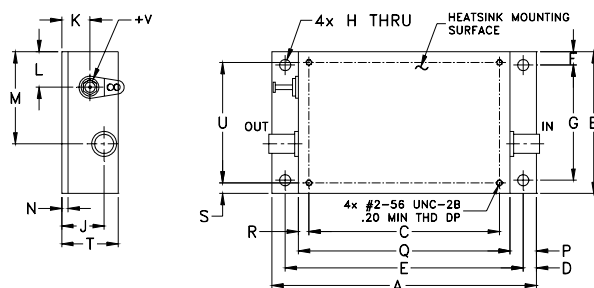

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	wt
3.75	2.00	2.700	.19	3.375	.19	1.625	.144	.50	.40	.50	1.30	.10	.38	3.00	.15	.15	.80	1.700	grams
95.25	50.80	68.58	4.83	85.73	4.83	41.28	3.66	12.70	10.16	12.70	33.02	2.54	9.65	76.20	3.81	3.81	20.32	43.18	150.0

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com









Maximum Ratings

Parameter	Ratings
Operating Temperature	-40°C to 55°C
Case Temperature	+65°C
Storage Temperature	-55°C to 100°C
DC Voltage	7V
Input RF Power (no damage)	24dBm

Permanent damage may occur if any of these limits are exceeded.

REV. C
 M151107
 ZHL-132LM-75+
 WZ/CP/AM
 151005

FREQUENCY (MHz)	GAIN (dB)	DIRECTIVITY (dB)	VSWR (:1)		NOISE FIGURE (dB)	POUT at 1dB COMPR. (dBm)	OUTPUT IP3 (dBm)
	6V	6V	IN	OUT	6V	6V	6V
40.00	15.88	8.27	1.72	2.21	3.22	25.24	43.32
100.00	15.16	7.38	1.50	1.75	3.32	25.55	45.07
200.00	14.74	7.66	1.46	1.52	3.45	25.47	44.98
300.00	14.65	7.68	1.49	1.35	3.45	25.53	46.16
400.00	14.68	7.47	1.44	1.26	3.59	25.43	43.88
500.00	14.65	7.44	1.37	1.13	3.54	24.79	44.09
600.00	14.61	7.35	1.28	1.11	3.54	24.43	42.28
700.00	14.53	7.36	1.21	1.17	3.42	24.53	42.81
800.00	14.36	7.55	1.20	1.20	3.5	24.87	43.08
900.00	14.30	7.60	1.26	1.18	3.57	25.12	44.83
1000.00	14.23	7.65	1.37	1.08	3.93	24.69	45.83
1100.00	13.85	8.23	1.48	1.05	3.71	24.16	43.63
1200.00	13.25	8.95	1.58	1.09	3.97	24.18	42.83
1300.00	12.89	9.18	1.67	1.15	4.02	23.98	42.33

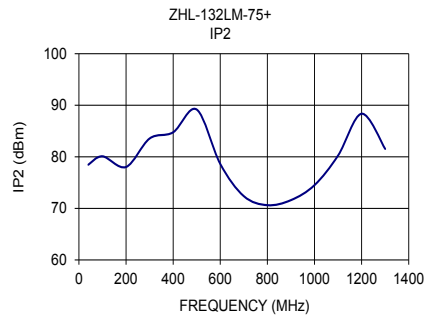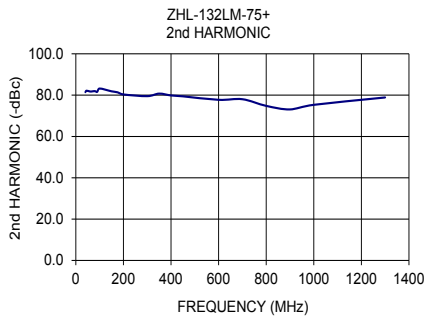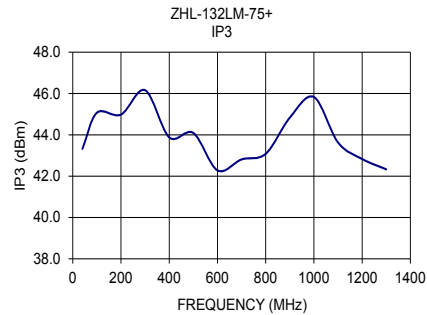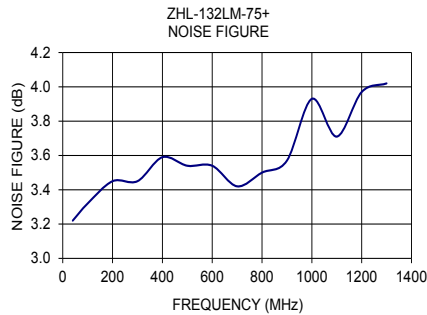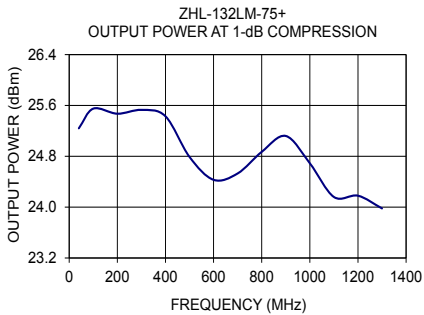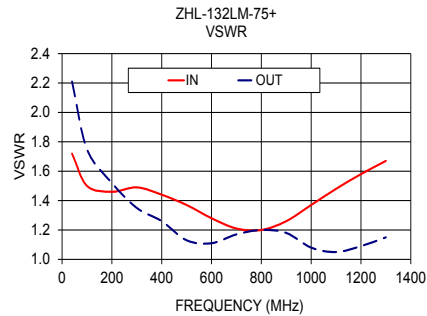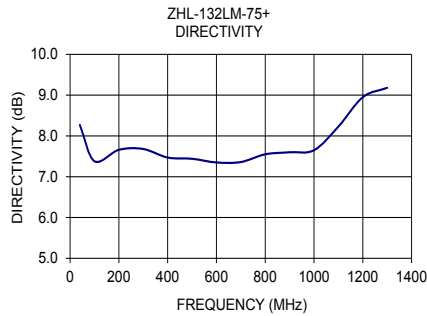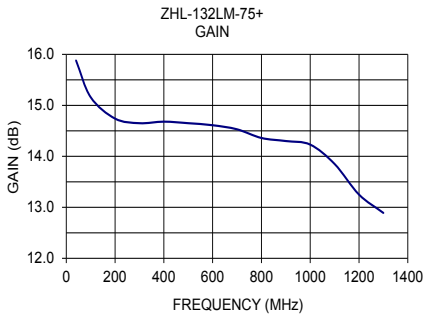

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

