






Standards
NF C 96-315
MIL-DTL-39030

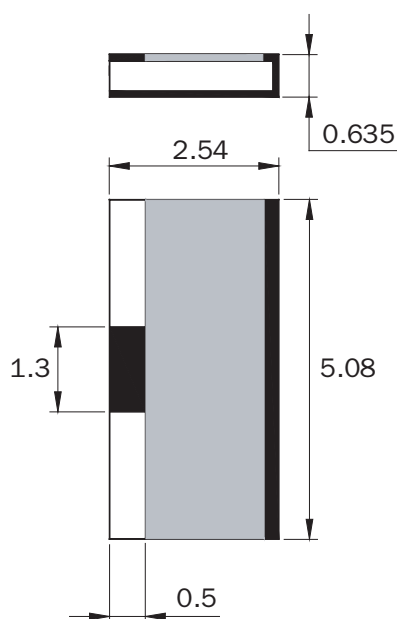

Substrate	AlN
Resistive film	Thick film
Protection film	Epoxy
Contacts finition	Silver over Nickel barrier



Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
40-0351Y	18	10	50	1.35

mm	inch
0.5	0.020
0.635	0.025
1.3	0.051
2.54	0.100
5.08	0.200



Available on Tap and Reel Packaging

