


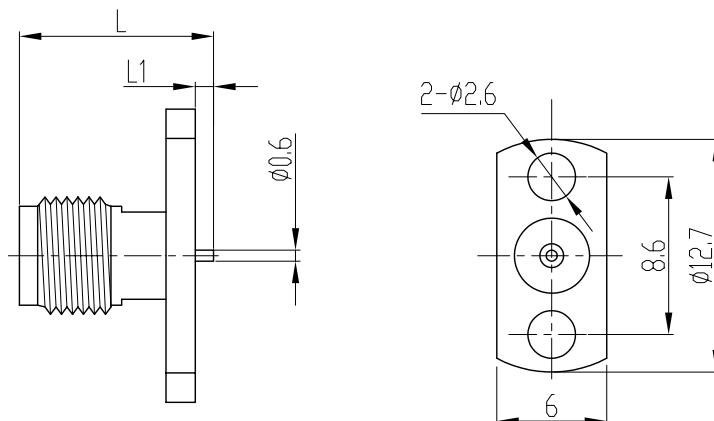

产品型号 type	L	L1
SMA-KFD48C	10.3	0.9
SMA-KFD340	11.0	1.5

Electrical Characteristics:

1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~18Ghz
3. Contact resistance
Center conductor: $\leq 3.0\ m\Omega$
Out conductor: $\leq 2.0\ m\Omega$
4. Insulation resistance: $\geq 5000M\Omega$
5. Insulator withstanding: 1000V
6. Durability: 500cycles

Application: MIL-C-39012/55D

Material&Finishing

1. Center contact :
Female: beryllium, gold plated
2. Body: Brass, gold plated
3. Insulators: PTFE

主要性能指标:

1. 特性阻抗: $50\ \Omega$
2. 频率范围: DC~18Ghz
3. 接触电阻:
中心导体: $\leq 3.0\ m\Omega$
外导体: $\leq 2.0\ m\Omega$
4. 绝缘电阻: $\geq 5000M\Omega$
5. 介质耐压: 1000V
6. 插拔次数: 500次

执行标准: MIL-C-39012/55D

材料和镀层

1. 中心接触件:
插孔: 铍青铜, 镀金
2. 壳体: 黄铜, 镀金
3. 绝缘子: 聚四氟乙烯

		SCALE	SMA-KFD48C RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE <table border="1"> <thead> <tr> <th>FRACTIONS</th> <th>DECIMALS</th> <th>ANGLES</th> </tr> </thead> <tbody> <tr> <td>.X±</td> <td>.15</td> <td>±1°</td> </tr> <tr> <td>.XX±</td> <td>.05</td> <td></td> </tr> <tr> <td>.XXX±</td> <td></td> <td></td> </tr> </tbody> </table>	FRACTIONS	DECIMALS	ANGLES	.X±	.15	±1°	.XX±	.05		.XXX±		
		FRACTIONS			DECIMALS	ANGLES										
.X±	.15	±1°														
.XX±	.05															
.XXX±																
2.5:1																
NAME	DATE															
DRAWN																
CHECKED																
APPROVED																

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.