

Coaxial

Voltage Controlled Oscillator

ZX95-1624+

Linear Tuning 1400 to 1624 MHz

Features

- linear tuning characteristics
- low phase noise
- low pushing
- protected by US patent 6,790,049

Applications

- r & d
- lab
- instrumentation
- wireless communication
- WiMAX



CASE STYLE: GB956

Connectors	Model	Price	Qty.
SMA	ZX95-1624-S+	\$40.95 ea.	(1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)	POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies,kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @12 dBr (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
			Typ.				VOLTAGE RANGE (V)	SENSI- TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)			Vcc (volts)	Current (mA)				
	Min.	Max.	Typ.	1	10	100	1000	Min.	Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Typ.	Max.
ZX95-1624+	1400 1624	+1	-78	-103	-124	-144	0.5	9.5	29-35	39	40	-90	-18	-10	1.5	1.2	5	40

Maximum Ratings

Operating Temperature -55°C to 85°C

Storage Temperature -55°C to 100°C


Absolute Max. Supply Voltage (Vcc) 6V

Absolute Max. Tuning Voltage (Vtune) 11.5V

All specifications 50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

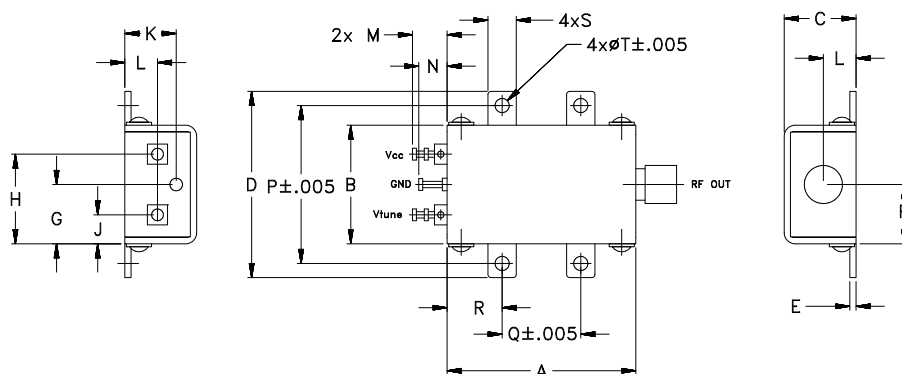

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
1.20	.75	.46	1.18	.04	.38	.38	.57	.18	.33	.21	.22	.18	1.00	.50	.35	.18	.106	grams
30.48	19.05	11.68	29.97	1.02	9.65	9.65	14.48	4.57	8.38	5.33	5.59	4.57	25.40	12.70	8.89	4.57	2.69	35.0

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com







REV. A
M143657
EDR-11081MPF1
ZX95-1624+
RAV
131008
Page 1 of 2

Performance Data & Curves*

ZX95-1624+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 1512 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	33.83	1365.1	1355.5	1349.6	-0.06	0.53	0.71	26.64	-34.0	-21.4	-24.9	1.02	1.92	-79.18	-103.7	-124.0	-144.0	1.0	-76.80
0.50	30.15	1381.3	1372.4	1367.2	0.00	0.58	0.74	26.72	-34.8	-21.1	-26.4	1.10	1.47	-78.77	-103.4	-124.2	-144.1	2.0	-86.12
1.00	29.29	1396.2	1387.5	1382.3	0.02	0.62	0.79	26.79	-35.2	-20.7	-30.0	1.15	0.65	-80.62	-103.3	-124.2	-144.0	3.5	-92.75
1.50	29.63	1410.7	1402.1	1397.0	-0.01	0.58	0.77	26.87	-35.0	-20.0	-34.0	1.18	0.13	-79.00	-103.3	-124.2	-144.1	6.0	-98.45
2.00	30.32	1425.4	1416.9	1411.7	0.01	0.56	0.72	26.99	-35.1	-19.6	-32.5	1.21	0.91	-80.66	-103.3	-124.2	-144.3	8.5	-102.09
2.65	31.56	1445.2	1436.8	1431.4	0.10	0.60	0.72	27.16	-33.6	-18.9	-29.2	1.25	1.61	-78.66	-102.5	-124.5	-144.5	10.0	-103.76
3.00	32.23	1456.1	1447.7	1442.3	0.17	0.65	0.74	27.26	-33.8	-18.6	-27.9	1.26	1.73	-78.24	-103.9	-124.6	-144.7	20.8	-110.94
3.50	32.96	1472.2	1463.8	1458.3	0.30	0.73	0.80	27.40	-32.3	-18.5	-26.9	1.26	0.83	-78.99	-103.6	-124.8	-145.0	35.5	-115.81
4.00	33.41	1488.5	1480.3	1474.7	0.42	0.85	0.89	27.53	-31.2	-18.2	-26.5	1.23	1.03	-79.07	-103.9	-125.0	-145.1	60.7	-120.72
4.50	33.40	1505.0	1497.0	1491.4	0.51	0.93	0.97	27.67	-30.2	-17.5	-25.6	1.18	1.87	-80.00	-103.8	-125.4	-145.1	86.7	-123.92
5.00	33.12	1521.4	1513.7	1508.1	0.54	0.96	1.01	27.80	-30.2	-17.1	-25.7	1.12	1.45	-77.78	-103.3	-125.4	-145.2	100.0	-125.15
5.50	32.62	1537.6	1530.3	1524.7	0.66	1.03	1.03	27.95	-28.5	-17.0	-25.2	1.06	0.39	-76.86	-102.3	-125.1	-145.3	148.1	-128.67
6.00	32.13	1553.5	1546.6	1541.0	0.77	1.13	1.11	28.07	-28.6	-16.7	-24.6	1.02	0.56	-77.32	-102.7	-125.1	-145.3	177.0	-130.31
6.50	31.70	1569.1	1562.6	1557.1	0.83	1.21	1.19	28.17	-27.5	-16.7	-24.3	1.00	1.27	-76.79	-102.6	-124.8	-145.3	211.6	-131.90
7.00	31.23	1584.5	1578.5	1572.9	0.85	1.21	1.19	28.28	-27.5	-16.2	-23.8	0.99	1.66	-75.43	-102.8	-124.7	-145.0	302.4	-134.92
7.50	30.82	1599.6	1594.1	1588.6	0.88	1.22	1.18	28.36	-26.6	-16.1	-23.3	1.00	1.32	-75.05	-101.9	-124.5	-144.8	361.5	-136.37
8.00	30.50	1614.3	1609.5	1603.9	0.95	1.25	1.19	28.45	-26.3	-15.6	-23.5	1.01	0.45	-75.19	-101.3	-124.3	-144.7	507.5	-139.48
8.50	30.21	1628.8	1624.8	1619.1	0.97	1.29	1.22	28.53	-26.2	-15.4	-23.1	1.03	1.45	-75.59	-101.6	-124.1	-144.5	606.7	-141.06
9.00	29.99	1643.0	1639.9	1634.2	0.95	1.26	1.20	28.61	-26.3	-15.2	-23.3	1.04	1.99	-74.19	-101.1	-123.8	-144.2	851.6	-143.97
9.50	29.64	1657.0	1654.9	1649.2	0.94	1.26	1.17	28.69	-26.3	-15.2	-24.0	1.05	1.56	-73.39	-100.6	-123.4	-143.8	1000.0	-145.22

*at 25°C unless mentioned otherwise

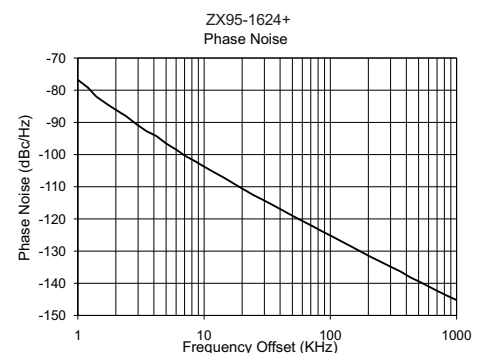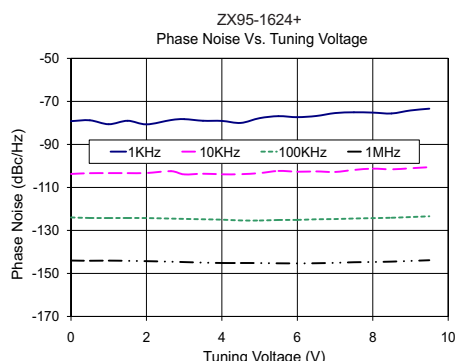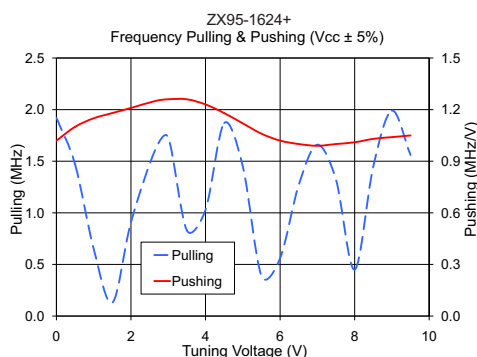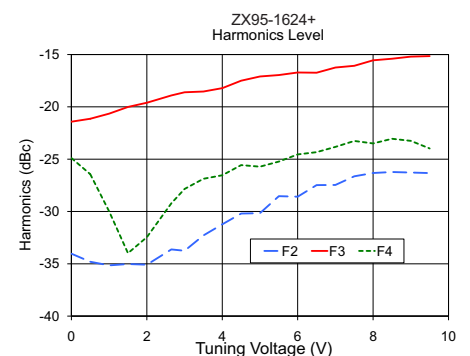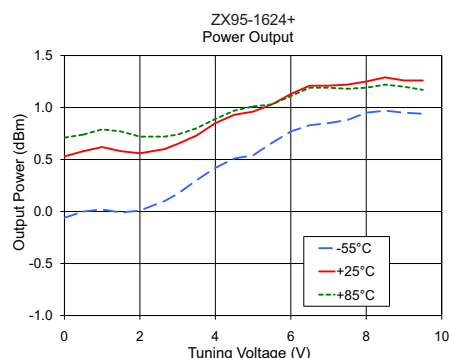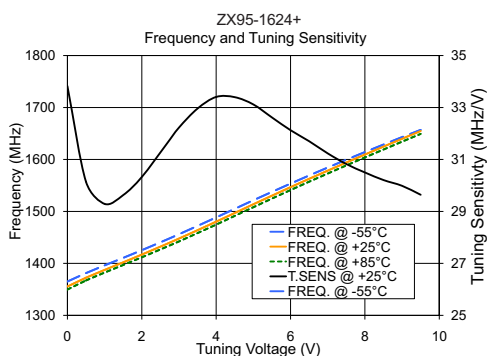

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

