


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

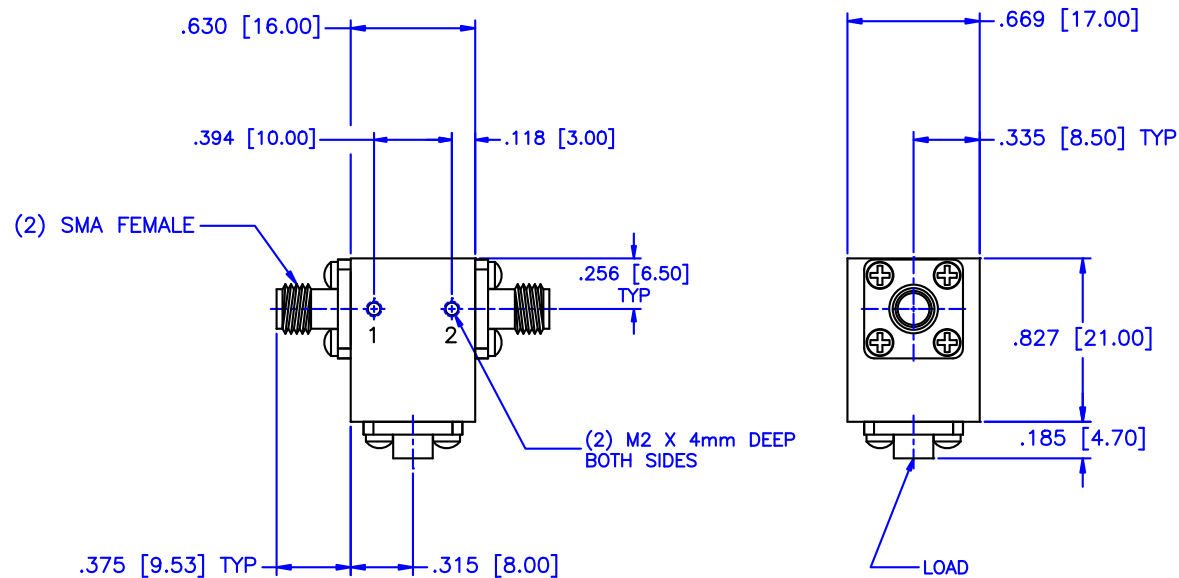

#### SPECIFICATIONS

Frequency Range: 8–18 GHz  
 Isolation: 16dB Min.  
 Insertion loss: 0.80dB Max.  
 VSWR: 1.45:1 Max.  
 Operating Temperature: –54°C to +85°C  
 Power Average: 25 Watts  
 Power Peak: 250 Watts

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344–6254 FAX: (727) 381–6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE: N/A	
			SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL ISOLATOR		
		PART NO. IS–29		
DRAWN: Paiboon Luekhamhan	DATE: 08–06–2001	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE: A REV: N/A DO NOT SCALE THE DRAWING
APPROVED: T. Nguyen	DATE: 08–06–2001		OD2L5 	DWG NO. 82117