
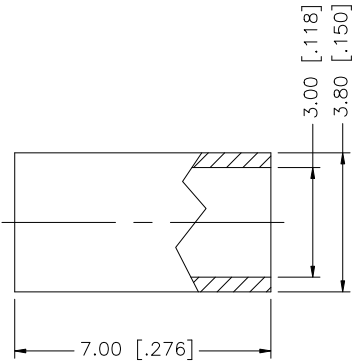
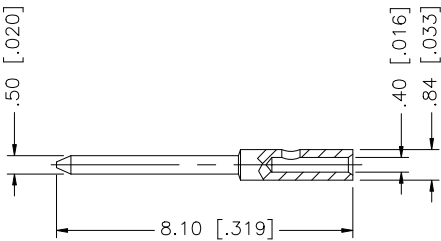
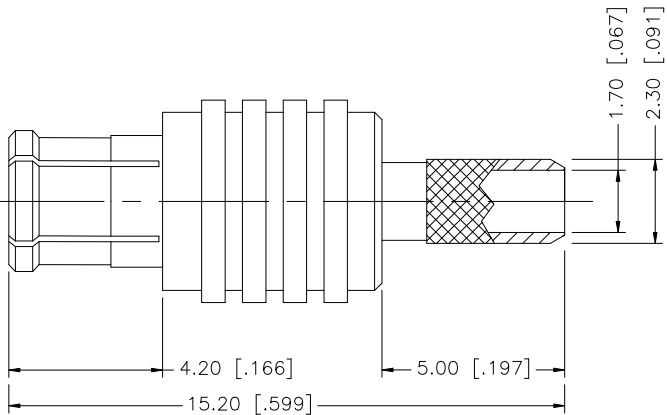


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/13/07	—	INITIAL RELEASE
A	03/24/09	—	UPDATE BARREL, CONTACT PIN, FERRULE DIMENSIONS

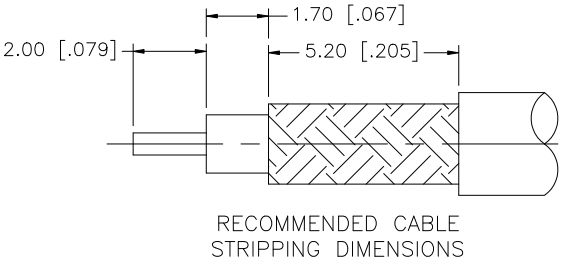

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .128" [3.25]
 2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex			
7						DRAWN GRS	03/24/09				
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	CHECKED		PART DESCRIPTION MCX CRIMP PLUG (FOR RG-179A/U, 179B/U, 187A/U)			
5	FERRULE	COPPER	GOLD	1		ISSUED					
4	CONTACT PIN	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	SHEET 1 OF 1		PART NO. 252101-75			
3	INSULATOR	PTFE	NATURAL	1		CAD FILE					
2	BODY	BER. COPPER	GOLD					DWG. NO. 252101-75.DWG			
1	HOUSING	BRASS	GOLD	1							
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING			REV. A	SIZE A	SCALE NA	