

HyperLink 4.9 / 5.8 GHz 22dBi High Performance Lightweight Die Cast Reflector Grid Antenna Model: HG4958-22EG

Features

- Superior Performance
- UV Stable Light Gray Powder Coat Finish
- All Weather Operation
- Point to Point, Point to Multi-point Systems
- Wireless Bridges and Backhaul Applications

RoHS Compliant

Applications

- 5.1/5.3/5.4/5.8 GHz ISM and UNII Band Applications
- Homeland Security
- 4.9GHz Public Safety Services: Fire, Police, Security
- Point to Point, Point to Multi-point Systems
- Wireless Bridges and Backhaul Applications



Description

Superior Performance

The HyperGain HG4958-22EG High-Performance Reflector Grid Wi-Fi Antenna is ideal for long-range highly directional 5.1/5.3/5.4/5.8 GHz ISM and UNII band applications. These antennas are ideal for point to point systems, point to multi-point and wireless bridges. Its compact design makes it nearly invisible in most installations, and it can be installed for either vertical or horizontal polarization.

Rugged and Weatherproof

The antennas' construction features a rust-proof cast aluminum reflector grid for superior strength and light weight. The 2-piece reflector grid is simple to assemble and significantly reduces shipping costs. The grid surface is UV powder coated for durability and aesthetics. The open-frame grid design minimizes wind loading.

This antenna is supplied with a 60 degree tilt and swivel mast mount kit. This allows installation at various degrees of incline for easy alignment. They can be adjusted up or down from 0° to 60°.



Vertical or Horizontal Polarization



Tilt & Swivel Mast Mount

Specifications

Mechanical Specifications

Connector	N Female
Weight	2.51lbs (1.14kg)
Grid Dimensions	11.81" x 15.75" (400mm x 600mm)
Mounting Mast Diameter	1.58" x 1.97" (40-50MM)


Electrical Specifications

Frequency	4900-5850
Gain	22dBi
Horizontal Beamwidth	10°
Vertical Beamwidth	12°
Polarization	Vertical or Horizontal
Impedance	500hm
F/B Ratio	25dB
Max. Input Power	100 Watts
VSWR	< 1.5
Lightning Protection	DC Short

Wind Loading Data

Wind Speed (MPH)	Loading
100	10.0 lb.
120	15.6 lb.

RF Antenna Patterns

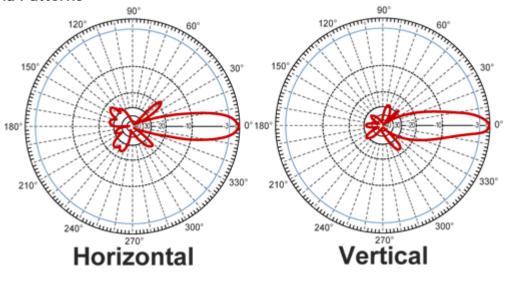

Guaranteed Quality

This product is backed by L-Com's Limited Warranty