




5 dB Directional Coupler

DC-7027-050-05N

Specifications:

Frequency Range:	700-2700 MHz
Coupling:	5 dB, $\pm .6$ dB
Insertion Loss:	2.1 dB
VSWR:	1.25:1 Max
PIM:	-120 dBc Min @ 2 x 43 dBm
Power:	50 Watts
Impedance:	50 Ohms
Directivity:	20 dB
Connectors:	N female
Operating Temp. Range:	-10°C to +50°C
Relative Humidity:	5% - 95%

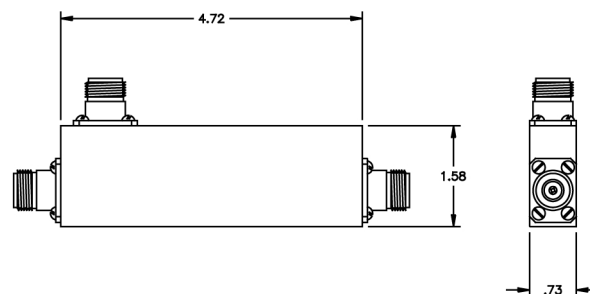

MICROWAVE FILTER CO., INC.
6743 KINNE STREET, E. SYRACUSE, NY 13057
E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
Web: www.microwavefilter.com