




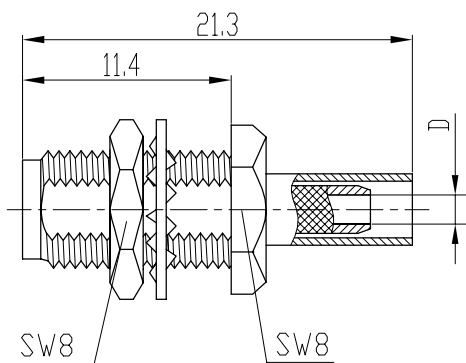

安装开孔
mounting hole



剥线尺寸
stripping dimensions

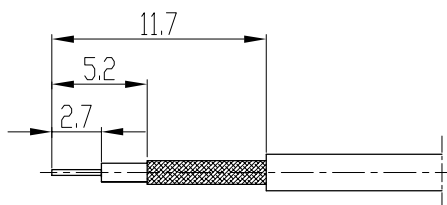

产品型号 type	电缆型号 cable type	备注 remark
SMA-KY3E	SFF-50-1.5-1、RG316/U	
SMA-KY3G		body, stainless steel(壳体, 不锈钢)

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
- Frequency range: DC~4Ghz
- Contact resistance
 - Center conductor: $\leq 3.0\ m\Omega$
 - Out conductor: $\leq 2.0\ m\Omega$
- Insulation resistance: $\geq 5000M\Omega$
- Insulator withstanding: 1000V
- VSWR: ≤ 1.4
- Durability: 500cycles

主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~4Ghz
- 接触电阻:
 - 中心导体: $\leq 3.0\ m\Omega$
 - 外导体: $\leq 2.0\ m\Omega$
- 绝缘电阻: $\geq 5000M\Omega$
- 介质耐压: 1000V
- 电压驻波比: ≤ 1.4
- 插拔次数: 500次

Application: MIL-C-39012/55D

执行标准: MIL-C-39012/55D

Material&Finishing

- Center contact :
 - Female: beryllium, gold plated
- Body: brass, gold plated
- Crimp ferrule: copper, nickel plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
 - 插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 线夹: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

		SCALE
		2.5:1
	NAME	DATE
DRAWN		
CHECKED		
APPROVED		

SMA-KY3C
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X± .15 ±1°
.XX± .05
.XXX±

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.