


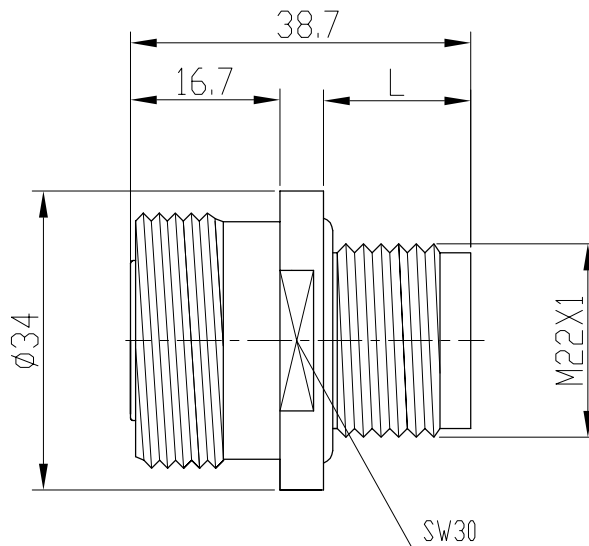

产品型号 type	L
L29-KYD1	17.0
L29-KYD1A	17.2

Electrical Characteristics:

1. Characteristic Impedance: 50Ω
2. Frequency range: DC~7.5GHz
3. Contact resistance
Center conductor: $\leq 1.0\text{ m}\Omega$
Out conductor: $\leq 0.5\text{ m}\Omega$
4. Insulation resistance: $\geq 10000\text{ M}\Omega$
5. Insulator withstanding: 4000V
6. Durability: 500cycles

主要性能指标:

1. 特性阻抗: 50Ω
2. 频率范围: DC~7.5GHz
3. 接触电阻:
中心导体: $\leq 1.0\text{ m}\Omega$
外导体: $\leq 0.5\text{ m}\Omega$
4. 绝缘电阻: $\geq 10000\text{ M}\Omega$
5. 介质耐压: 4000V
6. 插拔次数: 500次

Application: IEC 60169-4

执行标准: IEC 60169-4

Material & Finishing

1. Center contact :
Female: phosphor bronze, silver plated
2. Bodies: brass, silver plated
3. Insulators: PTFE

材料和镀层

1. 中心接触件:
插孔: 锡磷青铜, 镀银
2. 壳体: 黄铜, 镀银
3. 绝缘子: 聚四氟乙烯

		SCALE	
		1.5:1	
	NAME	DATE	
DRAWN			
CHECKED			
APPROVED			

L29-KYD1
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X±.15 ±1°
.XX±.05
.XXX±

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO., LTD.