

Surface Mount Isolators

Part Number: KTSI-300A


Main Features:

- ☐ Frequency Range: 3.0-3.6GHz, 3.6-3.8GHz
- ☐ High Power Handling, Low Insertion Loss, Small Size
- ☐ PCB Soldering Re-flow
- ☐ Wide Temperature Range: -10°C ~+70°C
- ☐ RFID and PCS, DCS, CDMA, UMTS Band Design

Electrical Specifications at Room Temperature:

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power	Round Size Dia.(mm)
KTSI-300A	3.0 - 3.6	full	0.3	23	1.20	60	Φ18.2
KTSI-300A	3.6 - 3.8	full	0.3	23	1.20	60	Φ18.2

Mechanical Dimensions (mm):

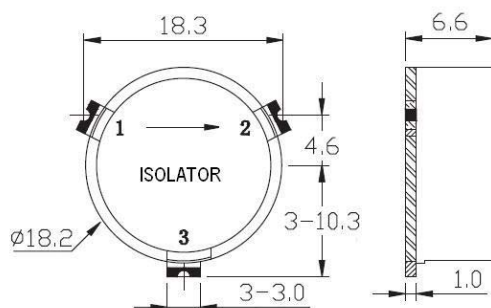

HOW TO ORDER

