
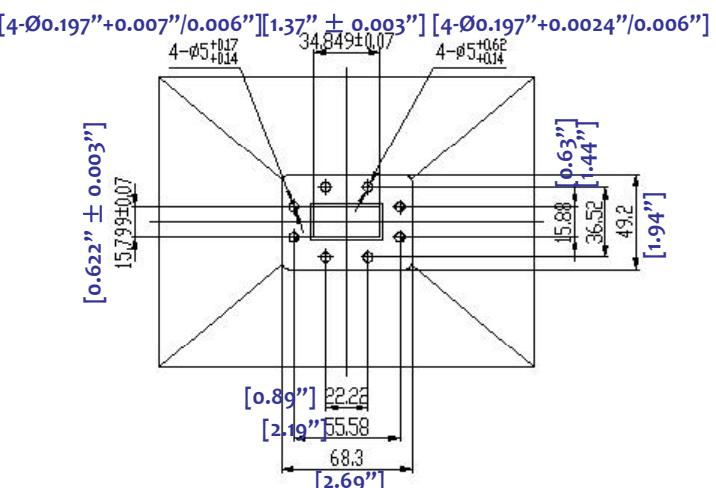


A | B | C | D | E | F | G | H | J | K | L | M | N | P | Q

WR137 WAVEGUIDE HORN ANTENNA – RW137HORN20E

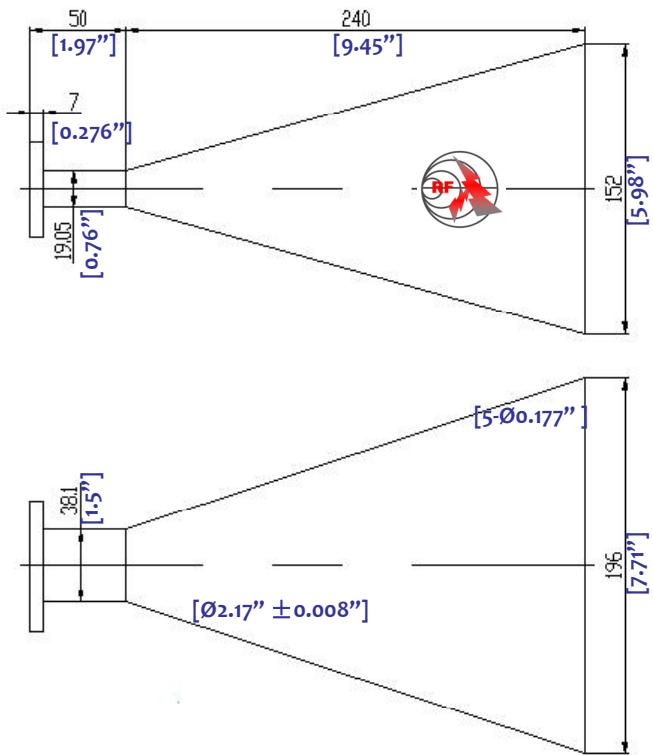

3.0 Electrical Specifications		
3.1	Frequency Range	5.85-8.2GHz
3.2	VSWR	1.5:1 (max)
3.3	Gain	20dB

1.0 Mechanical Specifications		
1.1	Waveguide type	Rectangular Waveguide WR137
1.2	Flange type	CPRF, COVER
1.3	Flange Holes	Through
1.4	Basis-material	Brass
1.5	Internal Body Finish	Silver Plated chromate or conversion
1.6	External Body Finish	Body painted with gray/black epoxy enamel

2.0 Environment specifications		
2.1	Operation Temp.	-40°C~+70°C
2.2	Storage Temp.	-50°C~+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

PAGE 1 OF 1	DATE Jun 21 th 2006
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRUTUBG BT RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND NOT DISCLOSE IT IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY	
DESIGN RPC RF-LAMBDA RPC	
CAD MODEL REVISION 11 ASSEMBLY REVISION VS5D5 ASSEMBLY NAME RFLVR05	
DRAWING NUMBER D05-1 RF-LAMBDA www.rflambda.com	