


SMN7103H-D1C

100 Hz to 500 kHz

Surface Mount Noise Sources

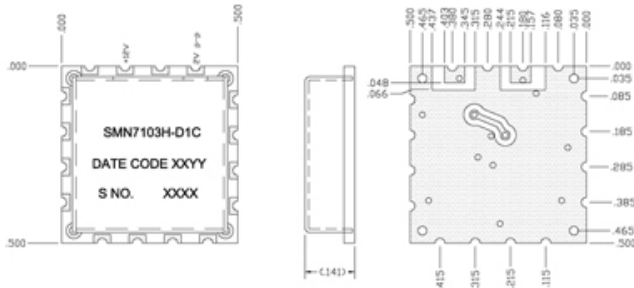

Specifications

RF Frequency	100 Hz to 500 kHz
Noise Output	2 .0 V P-P Min
Noise Power (N)	-8 dBm
Peak Factor	5:01
Bias Voltage	12 +/- 5% V
Supply Current	15 mA Max
Impedance	1100 ohms

Package and Connectivity

Construction	SMT 0.50 inch sq
--------------	------------------

Environmental

Operating Temperature	-55 to 85 °C
Storage Temperature	-55 to 125 °C

Notes



MERCURY COMMERCIAL ELECTRONICS

Microwave RF Components | Hudson, NH | (603) 546-4100 | rf.mrcy.com
 Specifications subject to change without notice

