
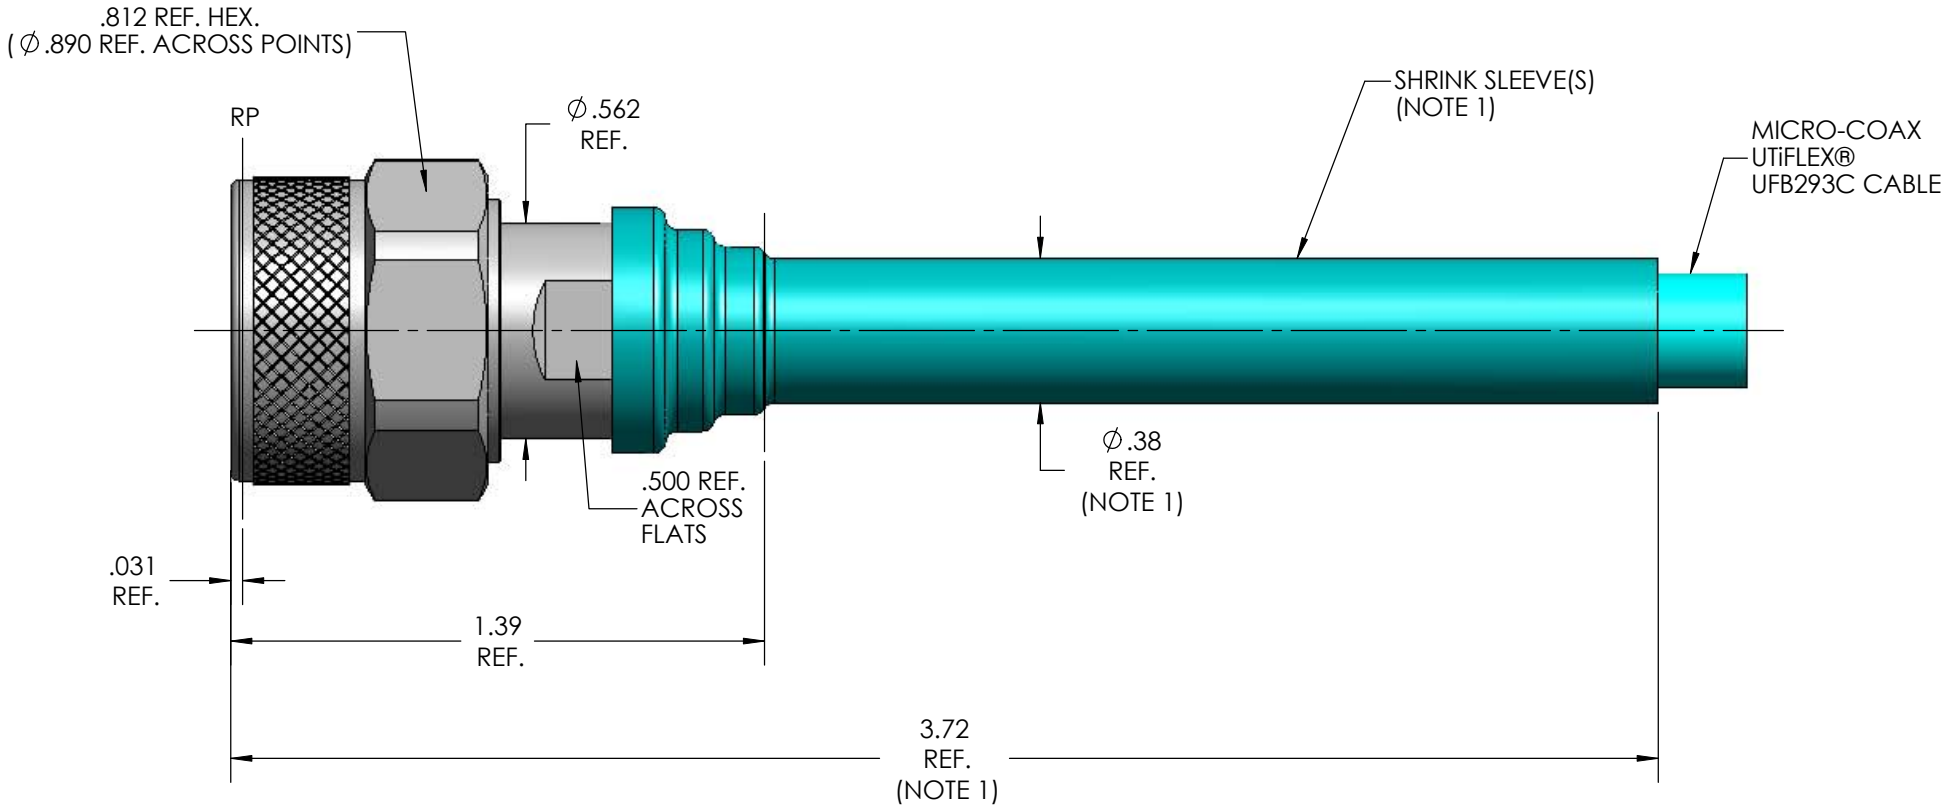


MECHANICAL CHARACTERISTICS	
INTERFACE	MIL-STD-348, FIGURE 402.1
SLANT SHEET	MIL-PRF-39012/1 REF.
RECOMMENDED MATING TORQUE	20 IN-LBS. NOM.
COUPLING PROOF TORQUE	25 IN-LBS. MIN.
COUPLING NUT RETENTION	100 LBS. MIN.
FORCE TO ENGAGE	6 IN-LBS. MAX.
FORCE TO DISENGAGE	6 IN-LBS. MIN.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	6 LBS. MIN.
AXIAL CONTACT RETENTION (FROM CABLE)	6 LBS. MIN.
CABLE RETENTION	20 LBS. MIN.
MASS	38.23 GRAMS NOM.
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	18 GHz
VSWR DC - 18 GHz	1.16:1MAX.
INSERTION LOSS	0.045 √F (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	1650 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB MIN.
CORONA	420 Vrms MIN. @70,000 FEET
RF HIGH POTENTIAL	1100 Vrms MIN.
CONTACT RESISTANCE (INNER)	1.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	0.2 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-55°C TO 150 °C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION B
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
CONTACT, FLEA	BERYLLIUM COPPER PER ASTM-B-196, GOLD PLATE PER MIL-DTL- 45204, OVER NICKEL PLATE PER QQ-N-290.
DIELECTRIC STOP	POLYPHENYLENE SULFIDE (PPS), PER ASTM-D-6358
BODY, SLEEVE, CLAMP NUT, & COUPLING NUT	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATE PER ASTM-A-967
SNAP RING	BERYLLIUM COPPER, PER ASTM-B-197
GASKET	SILICONE RUBBER PER ZZ-R-765
CONTACT RING	BRASS, PER ASTM-B-16, GOLD PLATE PER MIL-DTL-45204, OVER NICKEL PLATE PER QQ-N-290
DIELECTRIC BEAD	POLYETHERIMIDE THERMOPLASTIC PER ASTM-D-5205
APPLICATION	
CABLE(S)	UFB293C
INSTALLATION	PER CONFIGURATOR

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

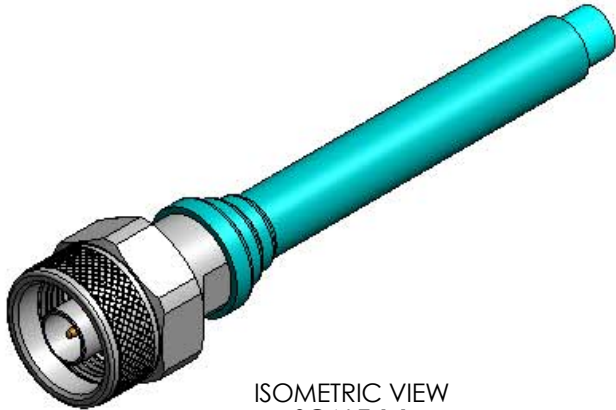

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

AL.

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	12/13/04	SRS	LXT
A1	ECO 85490	8/8/2008	MJM	RS
B	ECO 105994	10/29/2010	MJM	MJR

SHRINK SLEEVE(S)
(NOTE 1)

MICRO-COAX
UTIFLEX®
UFB293C CABLE

Ø.38
REF.
(NOTE 1)

3.72
REF.
(NOTE 1)

SPECIFICATION DRAWING

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.	INITIALS	DATE	MICRO-COAX[®] Leading the way in transmission line solutions. Copyright Micro-Coax, Inc.							
		05/03/04								
	CHKD.	11/12/10								
	APPVD.									
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE N PLUG, PRECISION, UFB293C CABLE								
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.								
.XXX	± .005									
.XXXX	± .0010									
ANGLES	± 2°									
		FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.		REV		
		64639	B	2:1	1 OF 1	SD904055		B		