


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

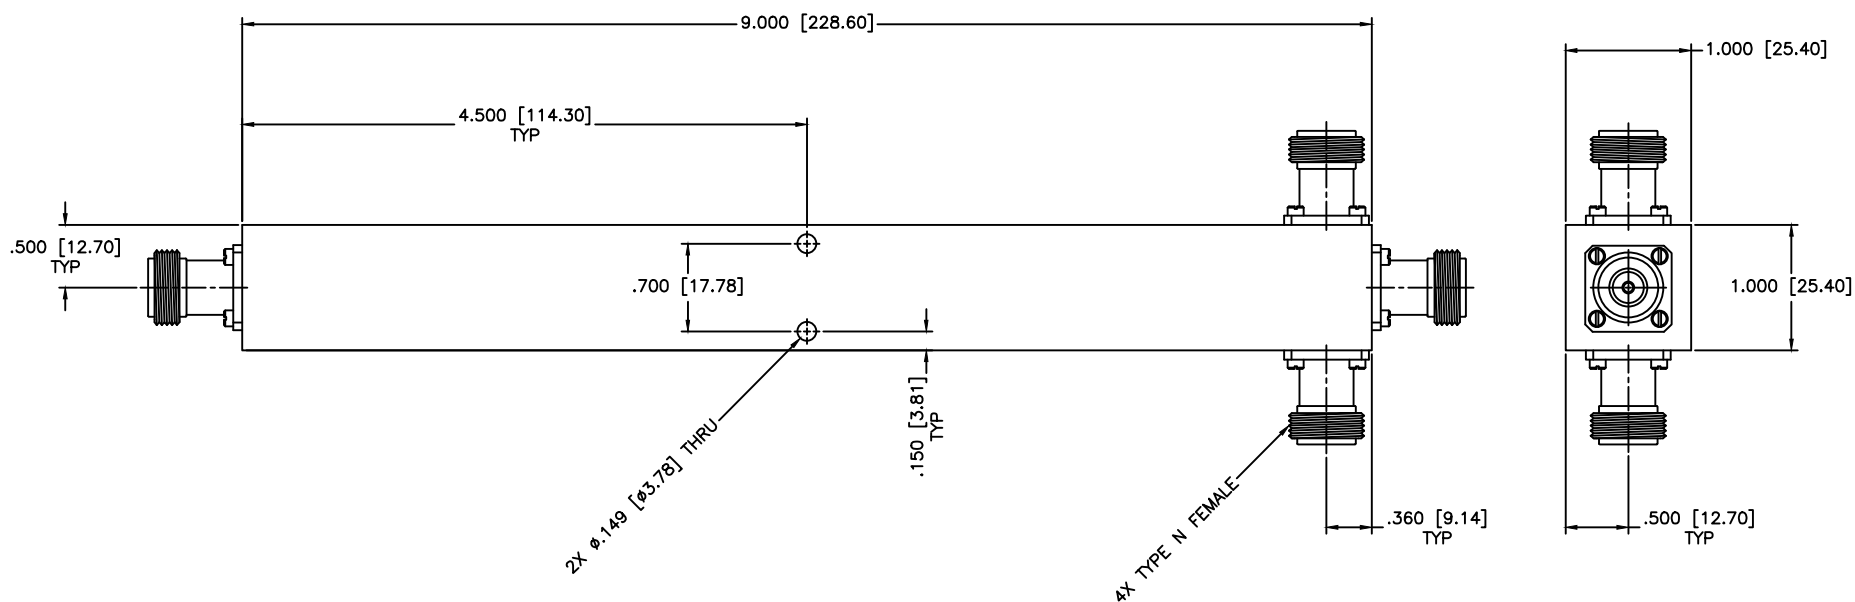

SPECIFICATIONS

Frequency Range: 0.8–2 GHz
Insertion Loss: 0.9dB Max.
Isolation: 16dB Min.
VSWR Input/Output: 1.50:1/1.45:1 Max.
Phase Balance: ± 12 Deg. Max.
Amplitude Balance: 0.3dB Max.
Power: 10W (Load vswr@1.2)

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 3-WAY POWER DIVIDER		SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 02-24-1998		PART NO. PS3-53/NF			
APPROVED: T. Nguyen		DATE: 02-24-1998		CAGE CODE: OD2L5		SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	
				DWG. NO. 80923			