

AS398 ATTENUATORS SMA

DC - 3 GHz
1 WATT

api 
technologies corp.
> INMET

MODELS: AS398-XXdB


SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 3.0 GHz
Standard dB Values _____ 1 - 10, 12, 15, 20, & 30 dB
Attenuation Accuracy:
1-10, 12, 15 & 20 dB _____ ± 0.3 dB
30 dB _____ ± 0.5 dB
VSWR _____ 1.25:1 Max.
Input Power _____ 1 Watt Avg. @ 25°C
Impedance _____ 50 Ohms
Operating Temp Range _____ -40°C to +80°C

Mechanical:

SMA Connectors _____ Gold Plated Brass
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper
Dielectrics _____ PTFE

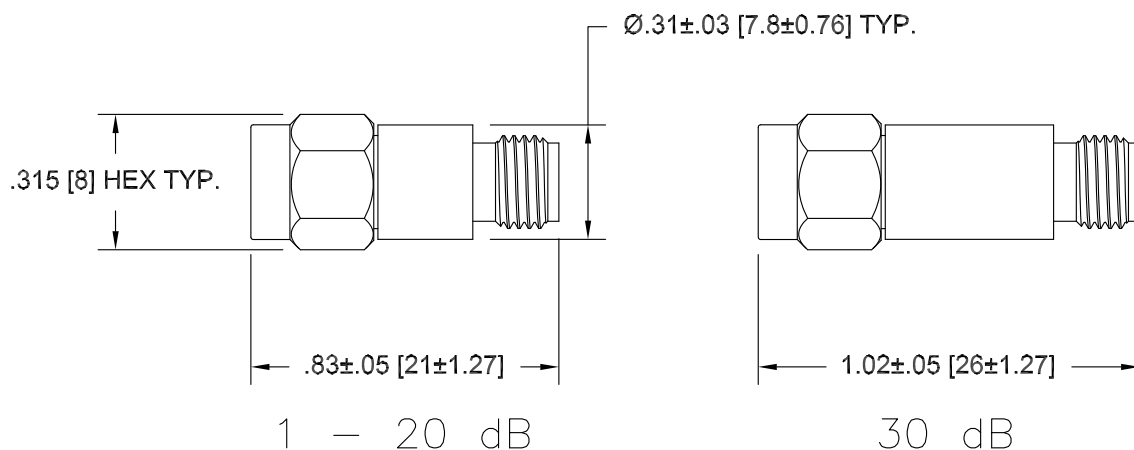

HOW TO ORDER:

Model Number: AS398-XX

dB Value

Ordering Examples:

Model Number: AS398-03
DC - 3 GHz; 3 dB; SMA - Male/Fem

Model Number: AS398-10
DC - 3 GHz; 10 dB; SMA - Male/Fem

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.