


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

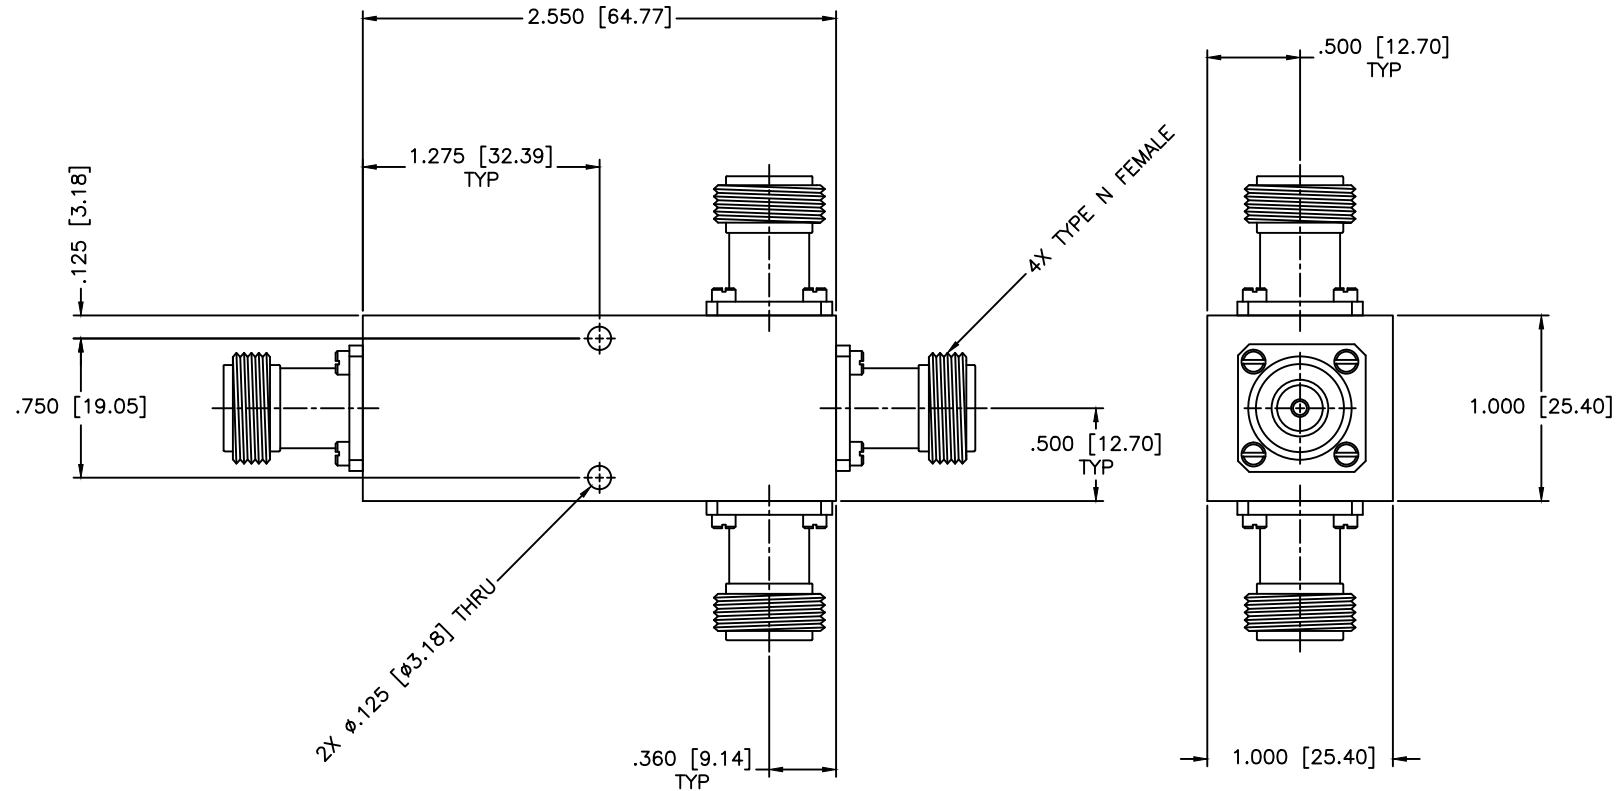

SPECIFICATIONS

Frequency Range: 3–5 GHz
 Insertion Loss: 0.9dB Max.
 Isolation: 17dB Min.
 VSWR: 1.50:1 Max.
 Phase Balance: ± 6 Deg. Max.
 Amplitude Balance: ± 0.15 dB Max.
 Power: 20W (Load vswr@1.2)

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET:	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 3-WAY POWER DIVIDER			
		PART NO. PS3-35/NF			
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 80922	
DO NOT SCALE THE DRAWING					

DRAWN: Paiboon Luekhamhan
 DATE: 06-29-1999

APPROVED: T. Nguyen
 DATE: 06-29-1999

THIRD ANGLE PROJECTION