


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

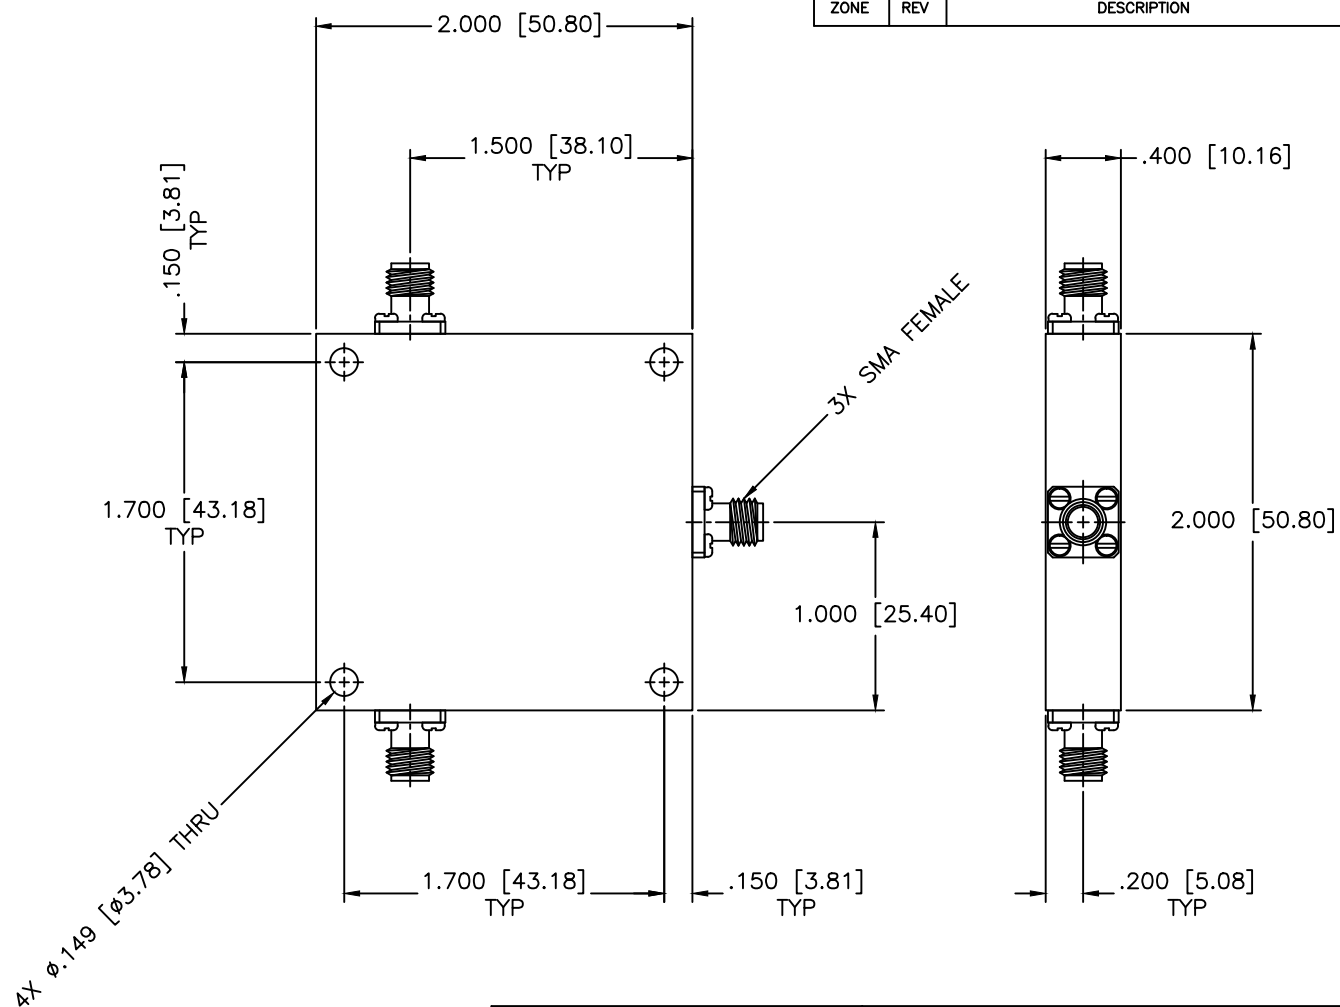

SPECIFICATIONS

Frequency Range: 0.96–1.21 GHz
 Isolation: 28dB Min.
 VSWR Max: 1.20:1 Max.
 Insertion Loss: 0.30dB Max.
 Amplitude Balance: ± 0.15 dB Max.
 Phase Balance: ± 1.5 Deg. Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A			
			SHEET: N/A			
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.007 ANGLE: ±1/2°	DRAWING TITLE: 2-WAY POWER DIVIDER			
			PART NO. PS2-57			
DRAWN: Paiboon Luekhamhan	DATE: 12-12-1997	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION 	CAGE CODE: 0D2L5	SIZE: A	REV: N/A	DWG NO. 80805
APPROVED: T. Nguyen	DATE: 12-12-1997		DO NOT SCALE THE DRAWING			