


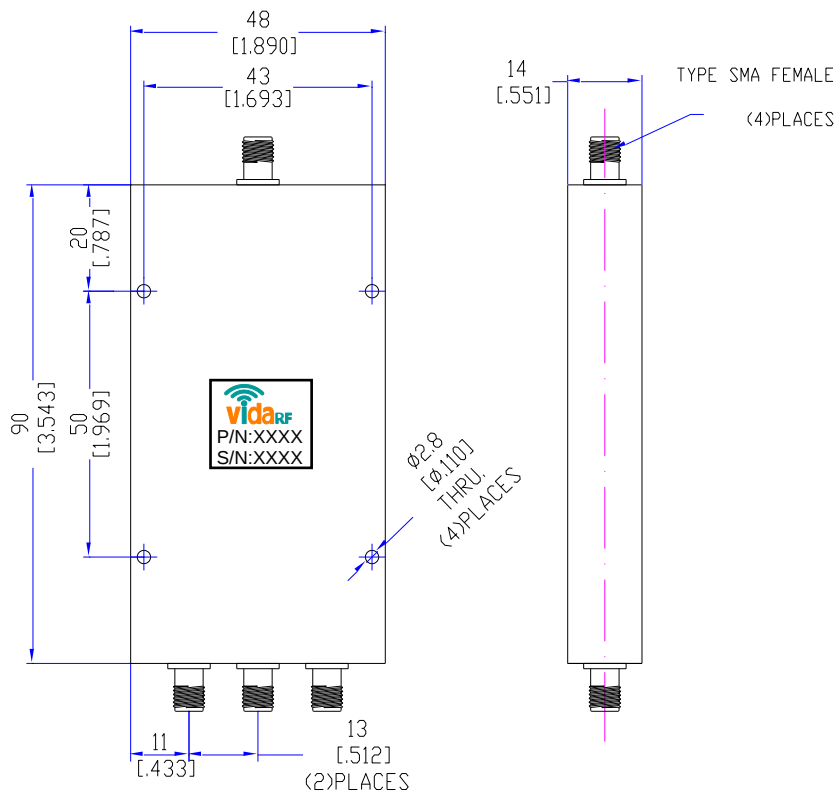

Electrical Specifications

Frequency Range	698~2700MHz
Insertion Loss	≤0.9dB
Isolation	≥20dB
VSWR	≤1.30:1
Amplitude Balance	≤±0.3dB
Phase Balance	≤±5°
Power Handling	Forward ≤30Watt; Reversed ≤1Watt
Impedance	50Ω
Port Connectors	SMA-Female
Surface Color	Silvery White

Environmental Parameters

Operating Temperature -40~+70℃

Operating Humidity Up to 90%,Non- Condensing

				Drawn: T. P 4/09/14	Title: 698-2700MHz 3 way divider			
				Checked: D. H 4/09/14				
Description	Ecn.No	Date	Rev	Approved: S. K 4/09/14				
 Tel:877-777-8432 www.vidaRF.com				Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only. Unless Otherwise Specified tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	Cage Code 6KQ83	Part No: VPD-0627A3		
					View: 			
					Size: A4	Scale: 4:1	Sheet: 1/1	Rev: A