

# Ultra-Flexible Test Cable      ULC SMSM+ Series

50Ω      DC to 18 GHz



CASE STYLE: NS1992

## The Big Deal

- Wideband, DC to 18 GHz
- Minimal performance change versus flexure
- Tight Bend radius of 2.0 inches

## Product Overview

Mini-Circuits' ULC-SMSM+ are ultra-flexible cables which provide wideband performance from DC to 18 GHz with low insertion loss and excellent VSWR. The cable is designed for stability of phase and amplitude versus flexure while offering tremendous durability and reliability. Its unique construction of a triple shielded cable with a unique molded boot allows the cable to have the greatest of flexibility and yet handle the demanding lab environments where constant bending and flexing are required. In addition, they feature SMA-M to SMA-M stainless steel connectors. Available from stock in a variety of lengths to support many different requirements.

## Key Features

Feature	Advantages
Ultra-Flexible 0.75 inch static bend radius 2.0 inch dynamic bend radius	Supports a wide range of test measurements in which tight bends are needed to be made.
Excellent stability of phase and insertion loss versus flexure	ULC-series test cables have been tested in bend radii as tight as 2.0 inches to qualify minimal change in insertion loss, insertion phase, and VSWR, providing reliable performance in a wide range of configurations.
Performance qualified to 20,000 flexures	Like all Mini-Circuits test cables, ULC-series models have been performance qualified up to 20,000 bend cycles, ensuring outstanding durability and extra long life.

# Ultra-Flexible Test Cable


50Ω 1.5FT DC to 18 GHz

## Maximum Ratings

Operating Temperature	-55°C to +85°C
Storage Temperature	-55°C to +85°C
Power Handling at 25°C	210W Max. at 2 GHz
	120W Max. at 6 GHz
	82W Max. at 12 GHz
	67W Max. at 18 GHz

Permanent damage may occur if any of these limits are exceeded.


## Outline Drawing

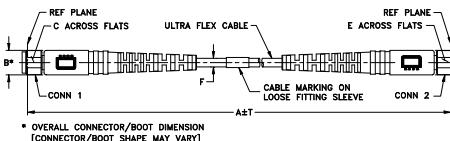

## Outline Dimensions (inch mm)

	A	B	C	D	E	F	T	Feet	Meters	wt
	.426	.313	.426	.313	.150±.004	3.81±0.10	.06	1.50	0.46	10.82

## Cable Construction

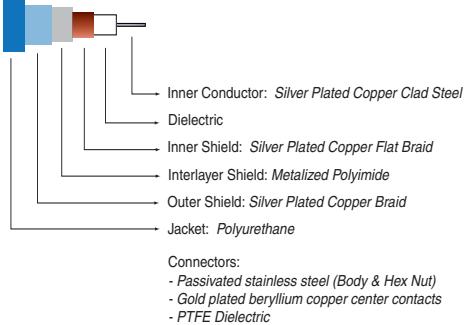

20K stress flex's

## Product Guarantee

Mini-Circuits® will repair or replace your test cable at its option if the connector attachment fails within six months of shipment. This guarantee excludes cable or connector interface damage from misuse or abuse.

## ULC-1.5FT-SMSM+



CASE STYLE: NS1992-1.5

Connectors	Model
SMA Male	ULC-1.5FT-SMSM+

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Electrical Specifications at 25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Unit
Frequency Range		DC		18	GHz
Length <sup>1</sup>			1.5		ft
Insertion Loss	DC-2	—	0.4	0.6	
	2-6	—	0.7	0.9	
	6-12	—	1.1	1.3	
	12-18	—	1.4	1.6	
Return Loss	DC-2	17	23	—	
	2-6	17	22	—	
	6-12	17	19	—	
	12-18	17	19	—	

1. Custom sizes available, consult factory.

## Performance Change vs. Flexure (Typical)<sup>2</sup>



Parameter	Condition (GHz)	Bend Radius (inches)			Units
		10.0	3.25	2.40	
Insertion Loss <sup>3</sup>	DC - 2	0.00	0.00	0.01	
	2 - 6	0.00	0.01	0.01	
	6 - 12	0.01	0.02	0.03	
	12 - 18	0.01	0.02	0.03	
Insertion Phase <sup>3</sup>	DC - 2	0.06	0.05	0.21	
	2 - 6	0.17	0.18	0.69	
	6 - 12	0.36	0.42	1.45	
	12 - 18	0.49	0.73	2.37	
VSWR <sup>3</sup>	DC - 2	0.00	0.00	0.00	
	2 - 6	0.00	0.00	0.00	
	6 - 12	0.01	0.01	0.02	
	12 - 18	0.01	0.01	0.02	

2. Performance change versus flexure with a 3 ft cable 360° around a 4" diameter mandrel.

3. Absolute values normalized to the reference position 0. See AN-46-003 under Associated Application Notes

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	
		SMA MALE 1	SMA MALE 2
10	0.02	44.80	45.53
100	0.08	33.56	33.59
200	0.12	52.56	67.74
400	0.17	45.14	46.50
1000	0.27	29.54	29.82
2000	0.38	34.49	33.91
3000	0.48	33.94	33.89
4000	0.56	26.52	26.50
6000	0.69	32.57	34.74
8000	0.81	38.58	41.32
10000	0.93	24.05	24.40
12000	1.03	28.59	29.79
14000	1.11	28.22	28.25
16000	1.22	26.51	24.37
18000	1.32	28.63	29.34

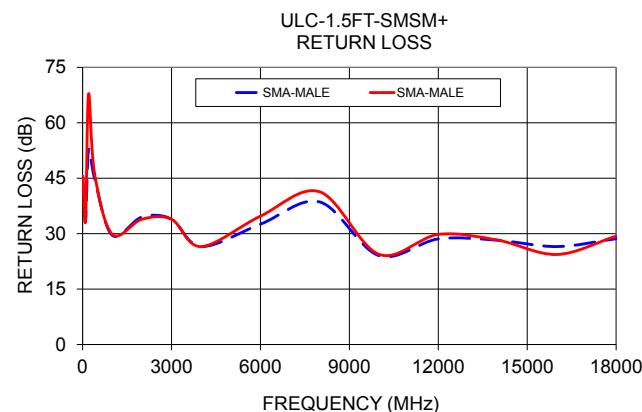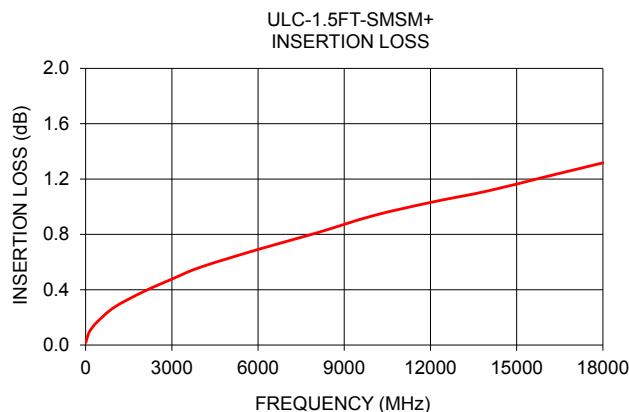

## Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)