

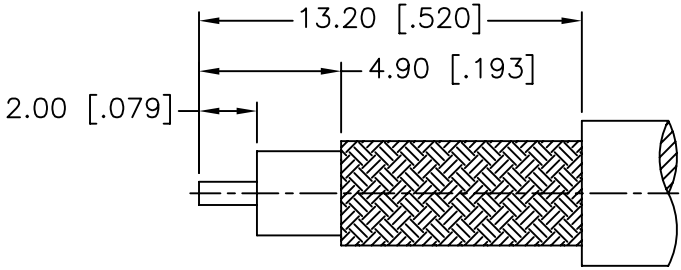
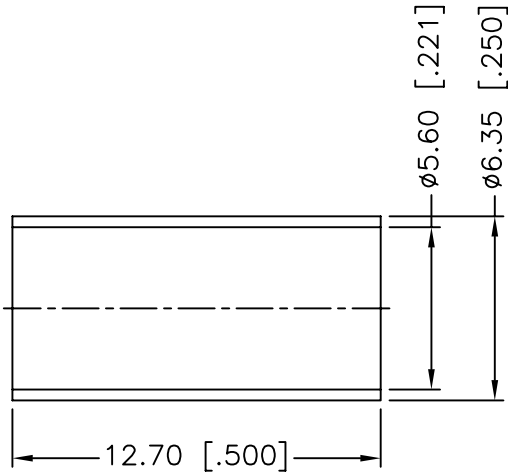


REV.	DATE	ECR NO.	DESCRIPTION
NC	10/22/10	XXXXXX	INITIAL RELEASE

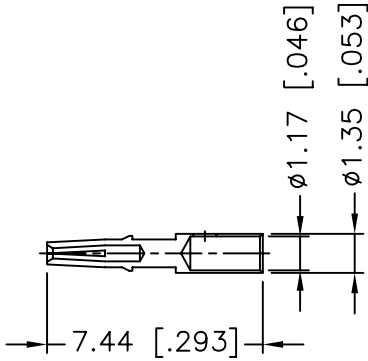

RECOMMENDED
CABLE STRIPPING DIM'S

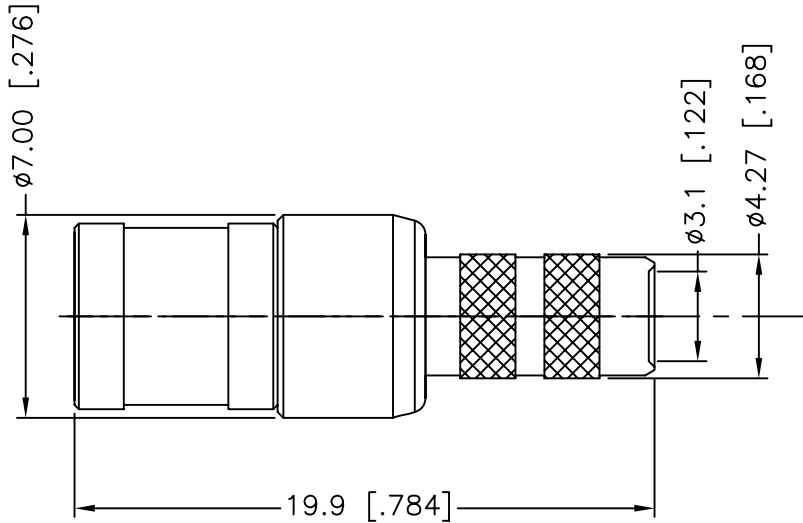

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .213

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex							
						DRAWN	SWANLTY						10/22/10		
						CHECKED			PART DESCRIPTION SMB CRIMP PLUG						
						ISSUED									
4	FERRULE	BRASS	GOLD	1			SHEET	1 OF 1		PART NO. 142220-10					
3	CONTACT PIN	BER.COPPER	GOLD	1											
2	INSULATOR	PTFE	NATURAL	1					DWG. NO. 142220-10.DWG						
1	BODY	BRASS	GOLD	1											
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/CONNEX/142220-10.DWG			REV.	NC	SIZE	A	SCALE	NA