
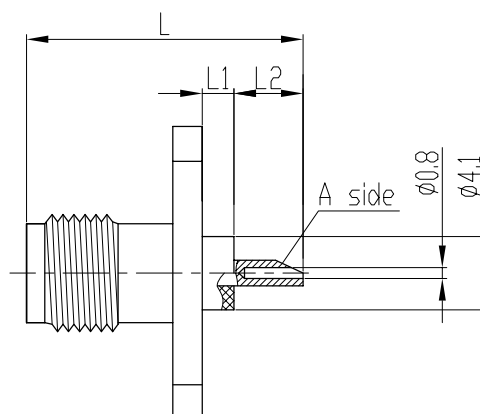


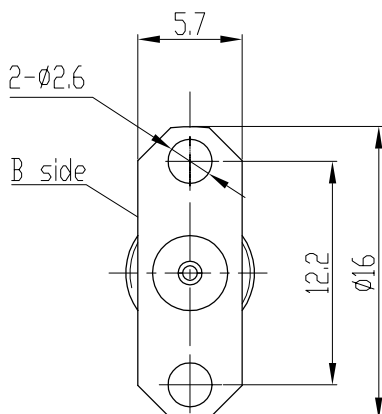

产品型号 type	L	L1	L2	备注 remark	
SMA-KFD17	14.6	1.1	4.0		
SMA-KFD100	16.5	4.0	3.0		
SMA-KFD353	17.5	5.0	3.0		
SMA-KFD86	14.5	0	5.1		
SMA-KFD312A	20.5	8.0	3.0	不锈钢, 镀金 stainless steel, gold plated	A面平行与B面 A parallel B

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~18Ghz
- Contact resistance
Center conductor: $\leq 3.0 \text{ m}\Omega$
Out conductor: $\leq 2.0 \text{ m}\Omega$
- Insulation resistance: $\geq 5000 \text{ M}\Omega$
- Insulator withstanding: 1000V
- Durability: 500cycles

Application: MIL-C-39012/55D

Material&Finishing

- Center contact :
Female: beryllium, gold plated
- Body: Brass, gold plated
- Insulators: PTFE


主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~18Ghz
- 接触电阻:
中心导体: $\leq 3.0 \text{ m}\Omega$
外导体: $\leq 2.0 \text{ m}\Omega$
- 绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 介质耐压: 1000V
- 插拔次数: 500次

执行标准: MIL-C-39012/55D

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

	SCALE	SMA-KFD86 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES $.X \pm .15$ $\pm 1^\circ$ $.XX \pm .05$ $.XXX \pm$
	2.5:1		
NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
DRAWN			
CHECKED			
APPROVED			