




RF-LAMBDA

The power beyond expectations

RFVAT0201A30



VOLTAGE CONTROLLABLE ATTENUATOR 0.2-1.0GHz

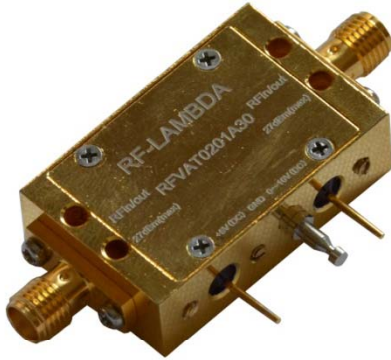

Features

- Wide Band Operation 0.2-1.0GHz
- High Power Handle Capability up to 10W upon request.
- Current control and low power consumption
- Low Insertion Loss and High dynamic range
- Temperature Range -55°C~+85°C
- Maximum voltage +50V DC.
- Customization available upon request

Absorptive type attenuator						
Part Number	Frequency (GHz)	Insert. Loss (dB)	VSWR (Max:1)	Attenuation (dB)	Avg. Power Handling (Watts)	Current Control (mA)
RFVAT0201A30	0.2-1.0	3-5	2	30	+23dBm opt +30dBm max.	80mA

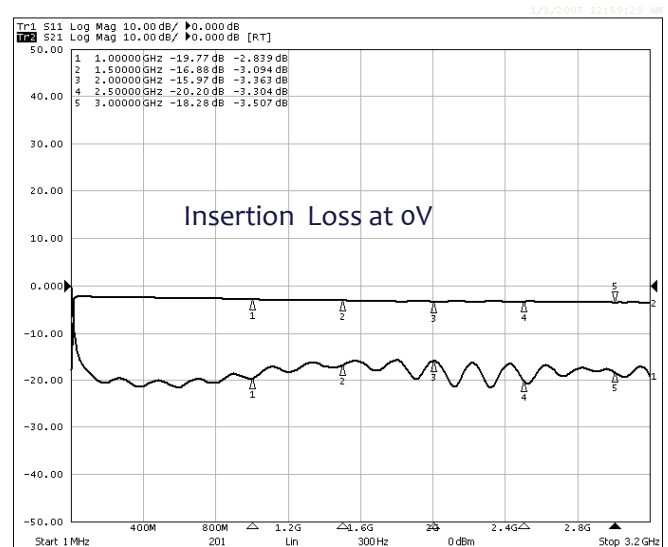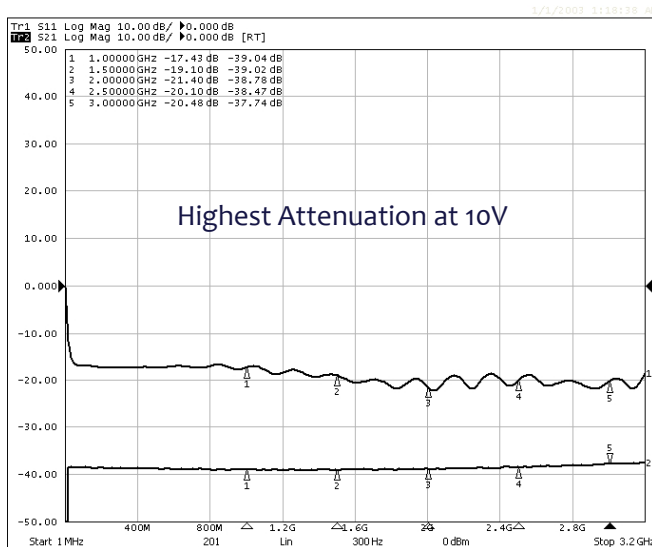

*standard unit with 220Ω internal current limiting resistor.
*max. current 20mA




Absorptive voltage Controllable Attenuator 0.2-1.0GHz



RF-LAMBDA

The power beyond expectations

RFVAT0201A30

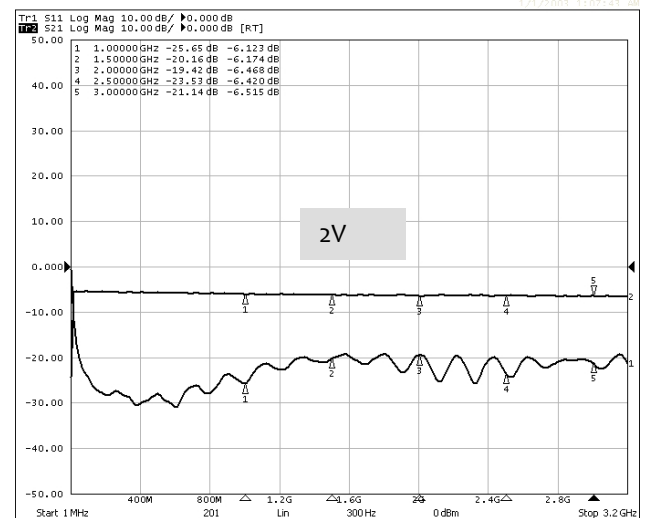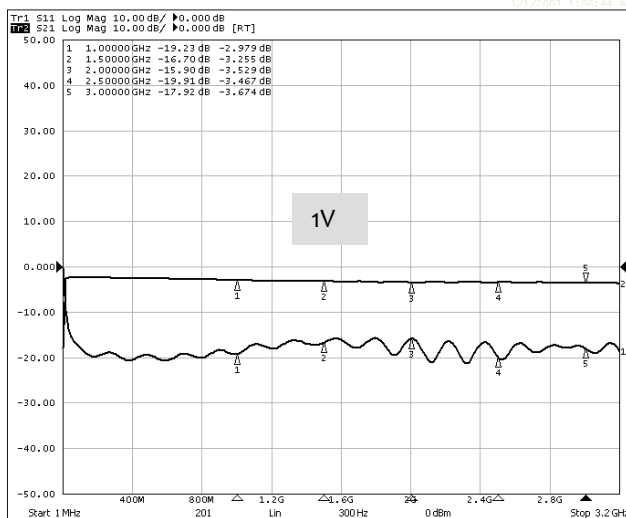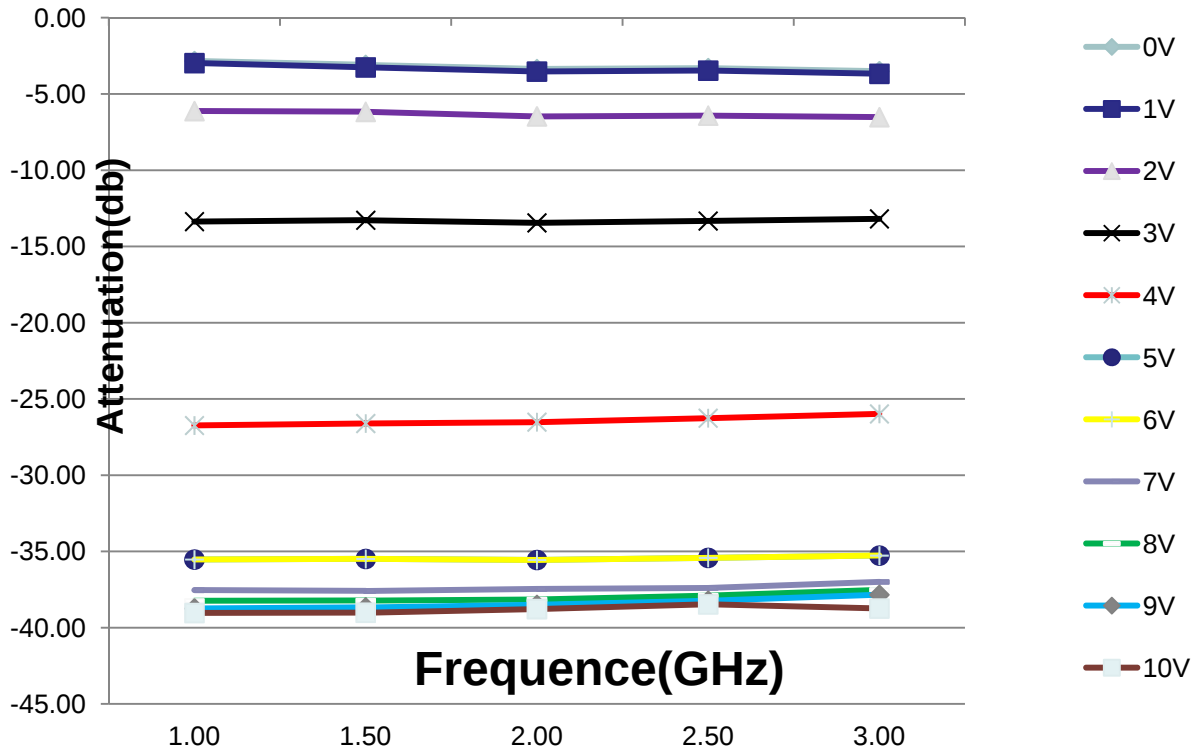

Absorptive voltage Controllable Attenuator 0.2-1.0GHz









RF-LAMBDA

The power beyond expectations

RFVAT0201A30

Absorptive voltage Controllable Attenuator 0.2-1.0GHz

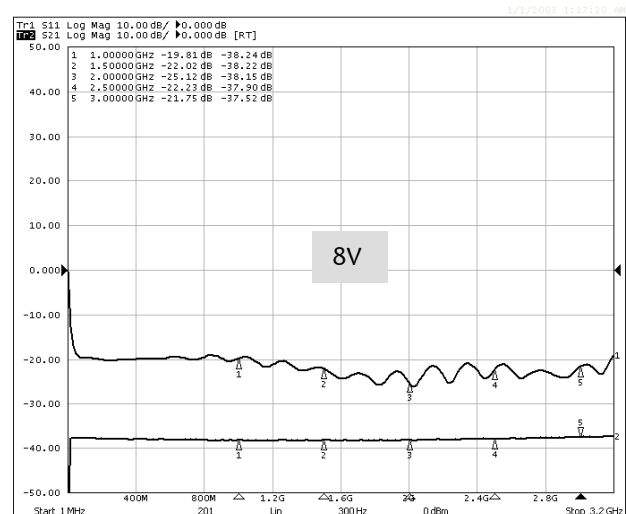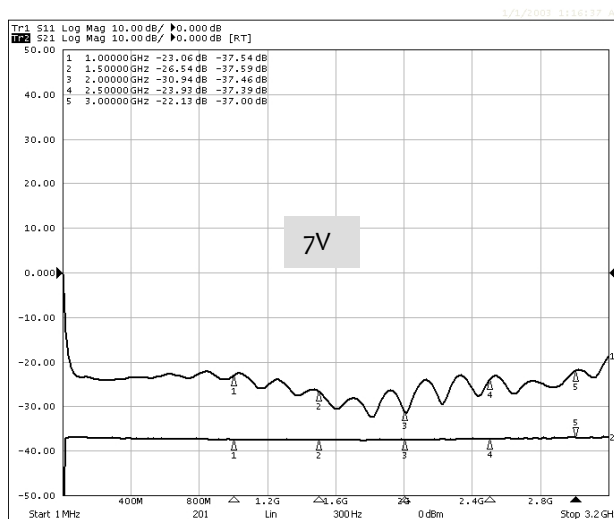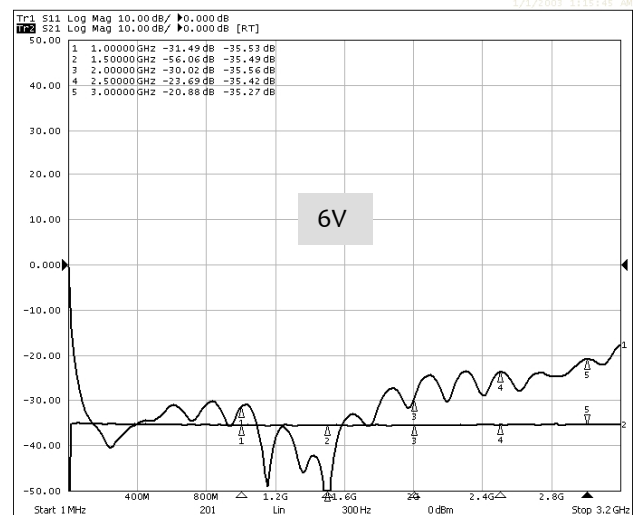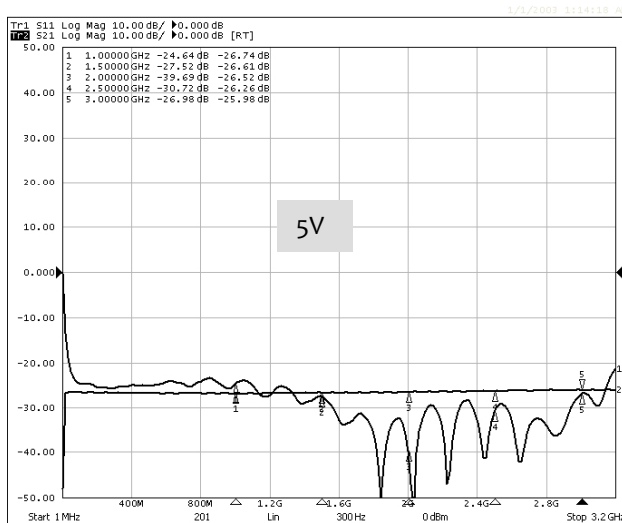
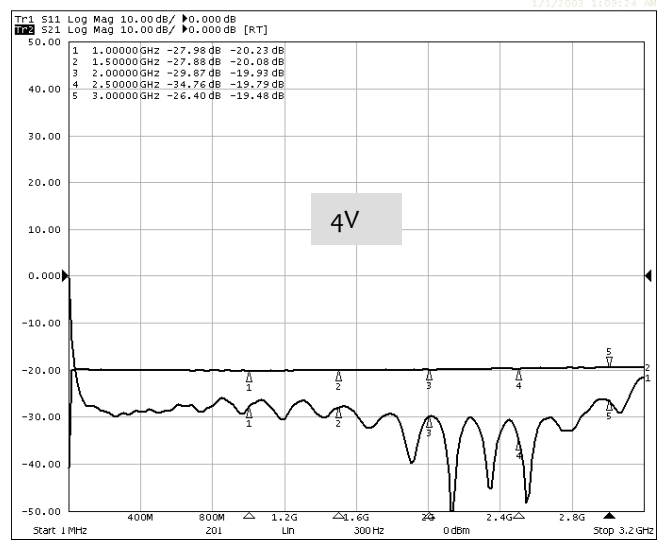
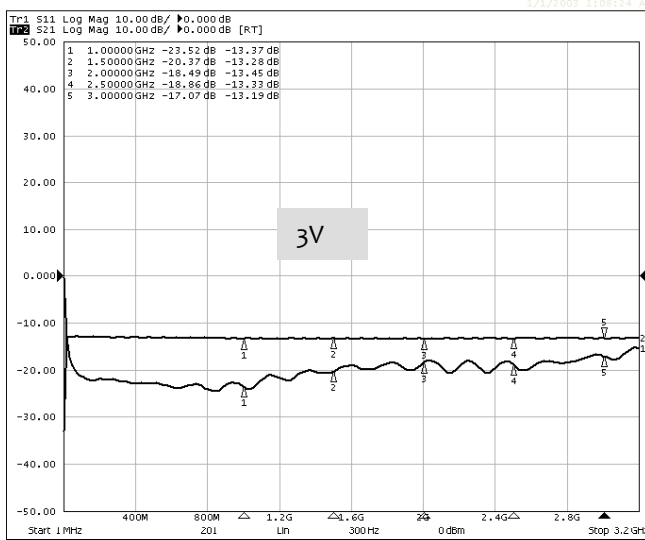




RF-LAMBDA

The power beyond expectations

RFVAT0201A30

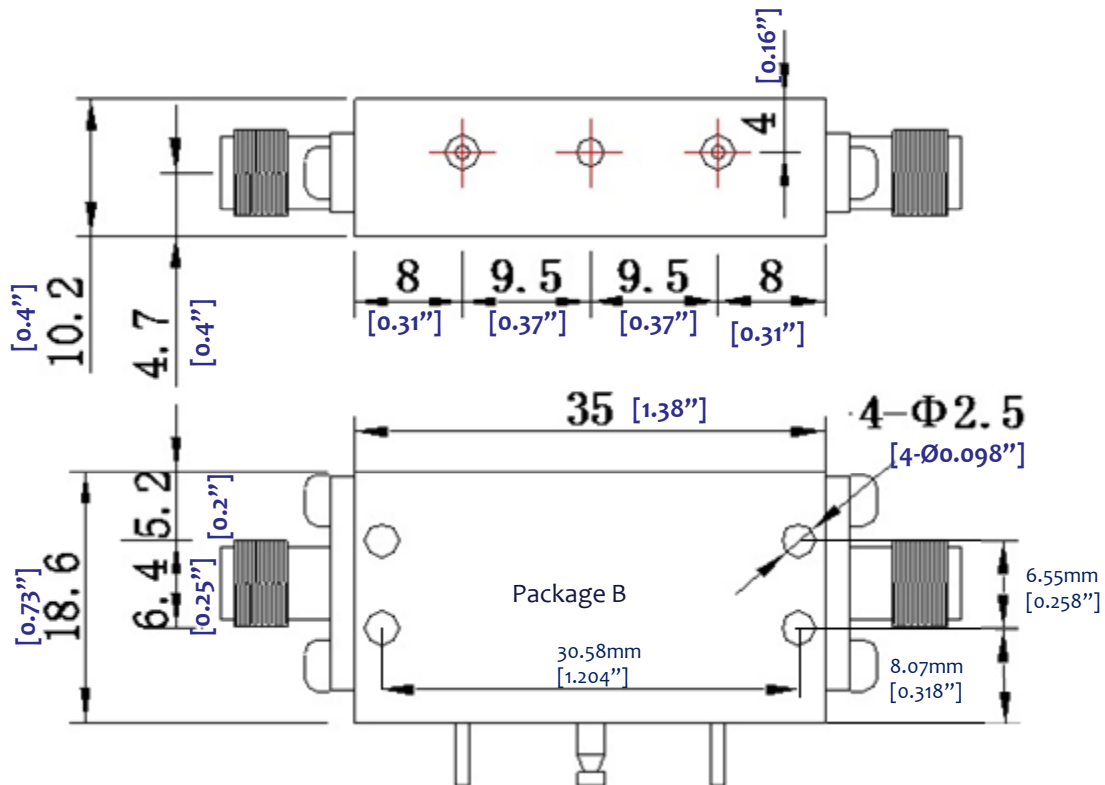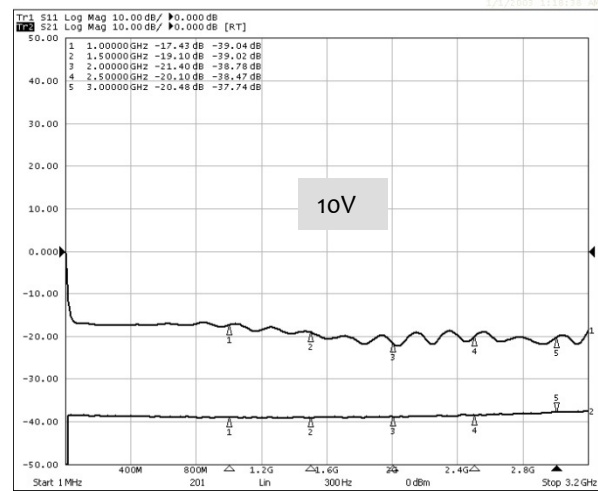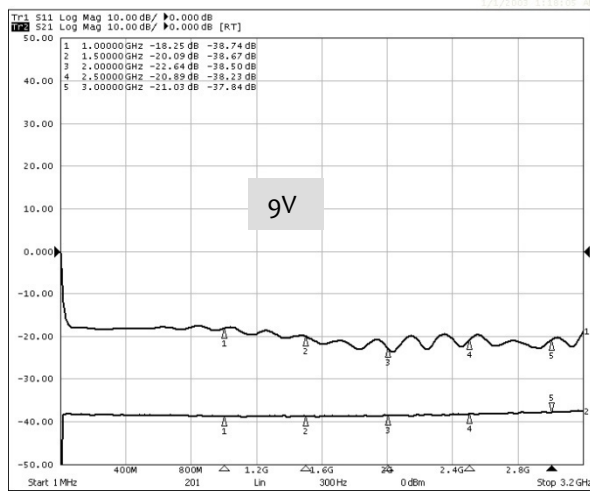

Absorptive voltage Controllable Attenuator 0.2-1.0GHz