


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

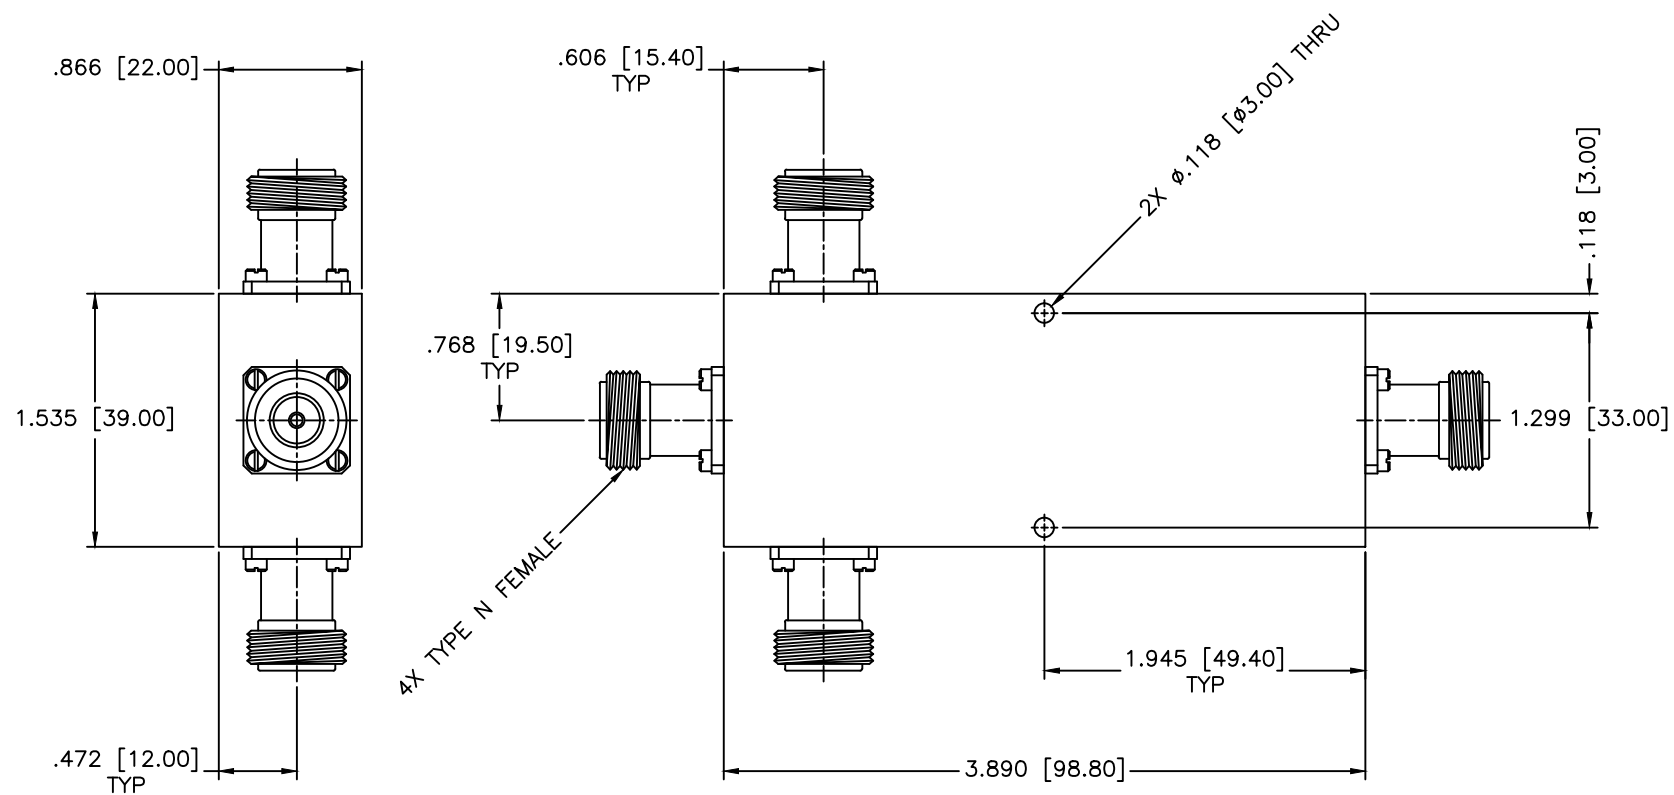

SPECIFICATIONS

Frequency Range: 800–2500 MHz
 Insertion Loss: 5.4dB Max.
 Isolation: 20dB Min.
 Power Rating: 50 Watts
 VSWR: 1.25:1 Max.
 Operating Temperature: –35°C to +55°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.05 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:			
		3-WAY POWER DIVIDER			
DRAWN:		DATE:		PART NO.	
Paiboon Luekhamhan		07-19-2006		PM3-114/NF	
APPROVED:		DATE:		CAGE CODE:	SIZE: A
T. Nguyen		07-19-2006		OD2L5	REV: N/A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES, INC. (MCLI)		THIRD ANGLE PROJECTION 		DWG NO.	
				82604	
				DO NOT SCALE THE DRAWING	