

## HMIC PIN Diode Variable Attenuator 0.8 - 1.0 GHz

Rev. V3

### Features

- Bandwidth: 0.80 GHz to 1.00 GHz
- <1.0 dB Insertion Loss, Typical
- 1.4:1 VSWR, Typical
- 24 dB Attenuation, Typical
- 40 dBm IIP3, Typical ( 1MHz Offset, @ +0dBm Pinc )
- 0-1.8 Volt Control Voltage.
- User can add an External Resistor for higher voltage requirements.
- RoHs Compliant

### Extra Features

- Usable Bandwidth: 0.60 GHz to 2.00 GHz
- 1.9 dB Insertion Loss, Max
- 2:1 VSWR, Max
- 20 dB Attenuation, Max

### Description and Applications


M/A-COM's MA4VAT900-1277T is a HMIC MONLITHIC PIN Diode Variable Attenuator which utilizes an integrated 90 degree 3dB hybrid with a pair of Silicon PIN Diodes to perform the required attenuation function as Voltage (Current) is applied.

This device operates from 0 to 2 Volts at 330 uA typical control current for maximum attenuation. The user can add external biasing resistors to the bias ports for higher voltage requirements as required.

M/A-COM's MA4VAT900-1277T PIN Diode Variable Attenuator is designed for AGC Circuit Applications requiring:

- Lower Insertion Loss
- Lower distortion through attenuation
- Larger dynamic range for wide spread spectrum applications

### MLP 3mm Package—Circuit Side View

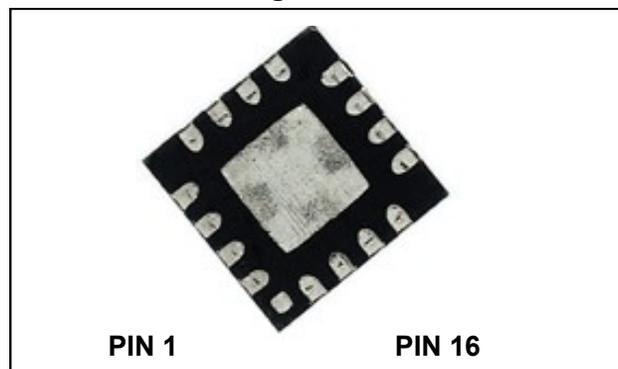

### PIN Configuration <sup>1</sup>

PIN	Function	PIN	Function
1	GND	9	DC2
2	GND	10	GND
3	GND	11	GND
4	GND	12	DC1
5	GND	13	GND
6	RF2	14	GND
7	GND	15	RF1
8	GND	16	GND

Center Paddle is RF and D.C. Ground

1. RF Input & RF Output Ports are Functionally Symmetrical

### Absolute Maximum Ratings @ +25 °C <sup>2,3</sup>

Parameter	Maximum Ratings
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-65 °C to +150 °C
Junction Temperature	+175 °C
RF C.W. Incident Power	+33 dBm C.W.
Reversed Current @ -30 V	50nA
Control Current	5 mA per Diode

2. All the above values are at +25 °C, unless otherwise noted.

3. Exceeding these limits may cause permanent damage.

## HMIC PIN Diode Variable Attenuator 0.8 - 1.0 GHz

Rev. V3

### Electrical Specifications @ +25 °C

Parameter	Frequency Band	Unit	Min	Typ	Max
<b>No DC Bias RF Parameter</b>					
Insertion Loss	0.80 GHz—1.00 GHz	dB	-	1.0	1.2
Input Return Loss		dB	11	14	-
Output Return Loss		dB	11	14	-
P1dB		dBm	30	33	-
IIP3		dBm	37	40	-
Control Voltage		V	-	0 V @ 0uA	-
<b>DC Bias RF Parameter</b>					
Maximum Attenuation	0.80 GHz—1.00 GHz	dB	21	24	-
Input Return Loss @ Max Attenuation		dB	17	20	-
Output Return Loss @ Max Attenuation		dB	17	20	-
Input IP3		dBm	15	18	-
Control Voltage @ Max Attenuation		V	-	1.80 V @ 330 uA	-

### Typical RF Performance Over Industry Designated RF Frequency Bands <sup>4,5</sup>


Band		Freq	I. Loss	Att.	R. Loss	IIP3	Phase -Relative-
		(MHz)	(dB)	(dB)	(dB)	(dBm)	(Degree)
AMPS	RX	824-849	0.9	24	13	40	-15°
	TX	869-894	0.9	24	13	40	
GSM	RX	880-915	1.1	21	11	40	-15°
	TX	925-960	1.1	21	11	40	

4. All are typical values only.


5. Relative phase is the measured Insertion Phase difference between Insertion Loss and 15 dB Attenuation.  
(Please refer to the plots below)

**Plots of Typical RF Characteristics @ +25 °C**


**Typical Insertion Loss & Attenuation**

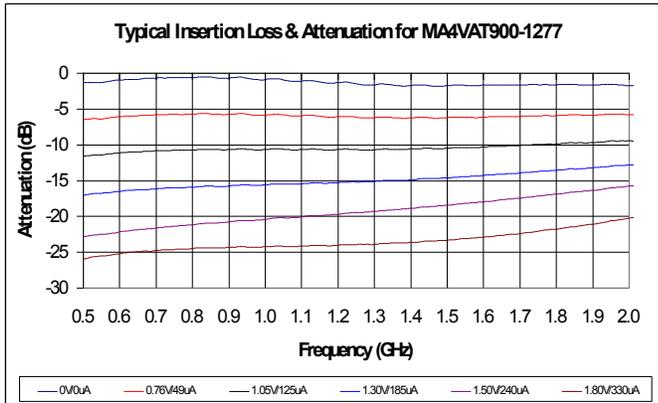


**Typical Attenuation vs Voltage (@900 MHz)**

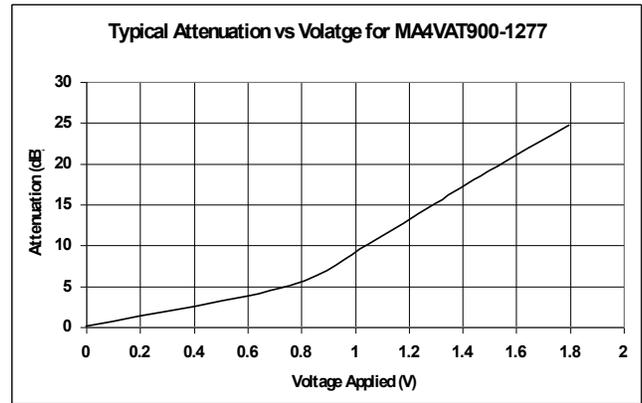


**Typical Return Loss @ All Attenuation Levels**

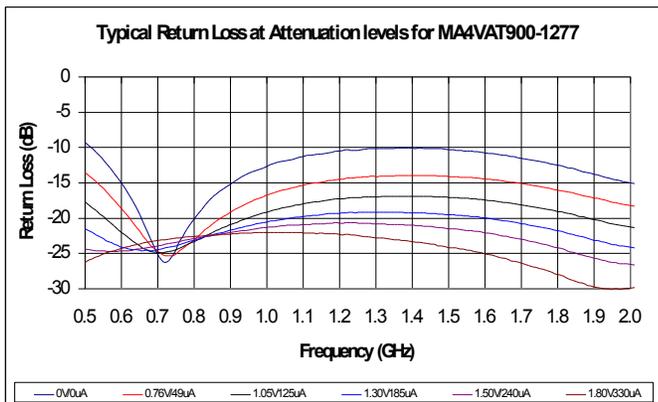

**Typical IIP3 vs Attenuation**

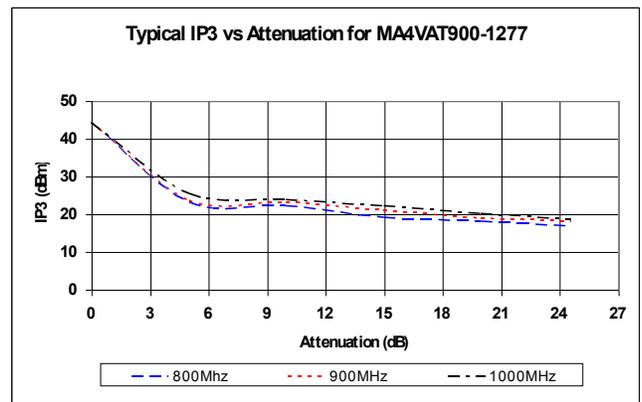

**Typical Relative Phase Shift Per Attenuation (Voltage)**

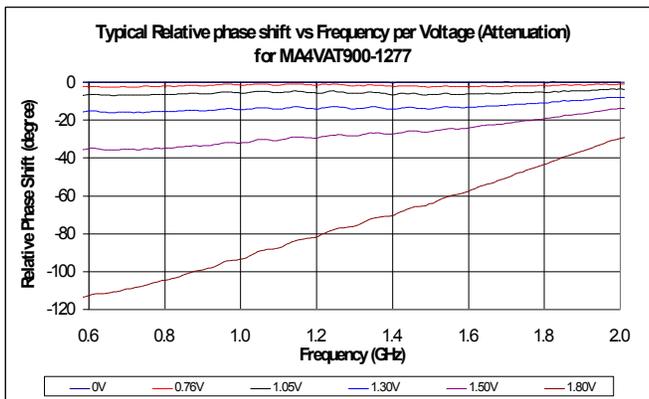

For Reference ONLY:



With 0 Ω External Bias Resistor, the following are Approximate Values:

- Insertion Loss = 0 V @ 0 uA
- 5dB Attenuation = 0.76 V @ 49 uA
- 10dB Attenuation = 1.05 V @ 125uA
- 15dB Attenuation = 1.30 V @ 185 uA
- 20dB Anttenuation = 1.50 V @ 240 uA
- Max Attenuation = 1.8 V @ 330 uA

## HMIC PIN Diode Variable Attenuator 0.8 - 1.0 GHz

Rev. V3

### Package PIN Designation, External Components, and Equivalent Circuit

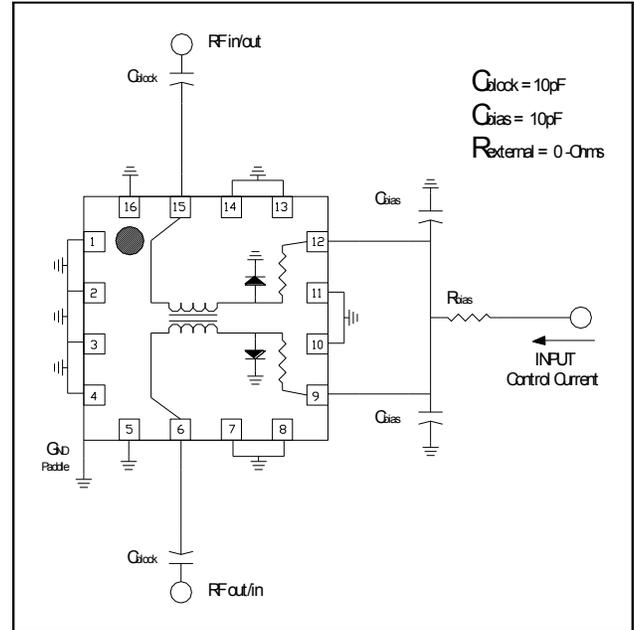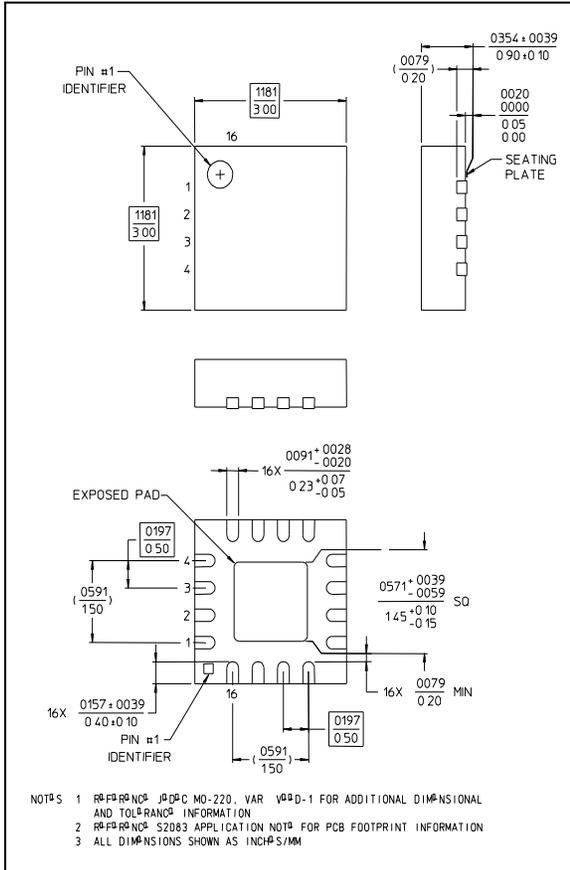

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

5 MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

---

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.  
Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.