




1.5 kW



Standards
NF C 96-315
MIL-DTL-3933



Impedance $50 \Omega \pm 5\%$
Frequency DC - 1 GHz
Max VSWR ≤ 1.30 at 1 GHz
Temperature range -55 to +125°C
Average power @ 25°C 1.5 kW
Weight 24 kg

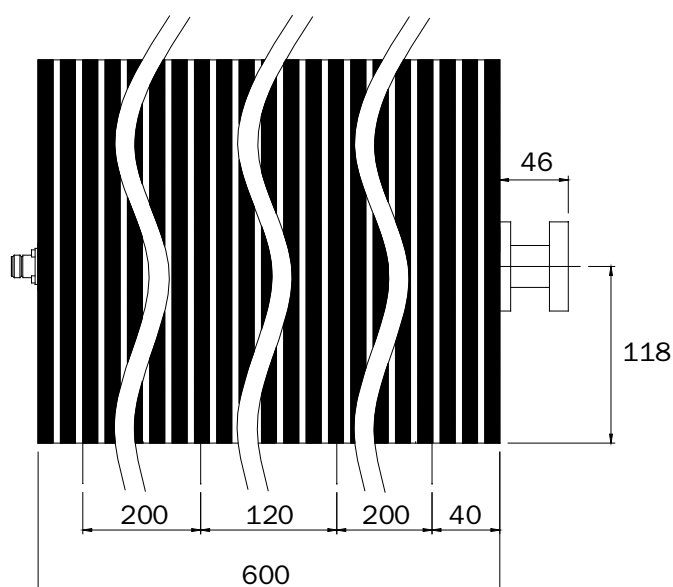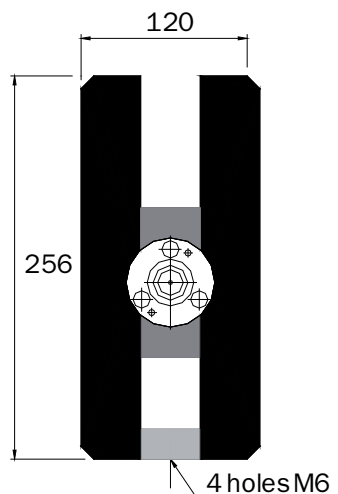

Dimensions in mm

Attenuation (dB)	P/N	Connector	Accuracy $\pm \Delta \alpha$ (dB)
30	16-6547	EIA 7/8" - Nf	2
30	16-6533	7-16 m/f	2
40	16-6658	7-16m / Nf	2*

* DC to 100 MHz Accuracy : ± 0.4 dB
Variation : ± 0.4 dB

Others attenuations on request