

N M/F ADAPTER RA TRIMETAL PLATING

SM4534

SPECIFICATIONS

ELECTRICAL



FREQUENCY: 0-6 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.2:1 MAX @ 6 GHZ

MECHANICAL

MATERIALS BODY: TRIMETAL PLATED BRASS
MATERIALS CONTACT MALE: BRASS
MATERIAL CONTACTS FEMALE: BeCu
CONTACT PLATING: Au MIL-G-45204
DIELECTRIC: PTFE
INTERFACE: MIL-STD-348A
OPERATING TEMPERATURE: -45° to +120° C

ROHS COMPLIANT

MEASUREMENTS BLOW ARE TYPICAL

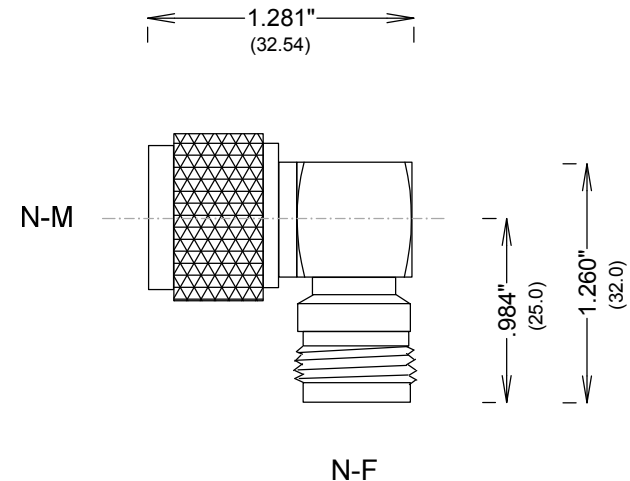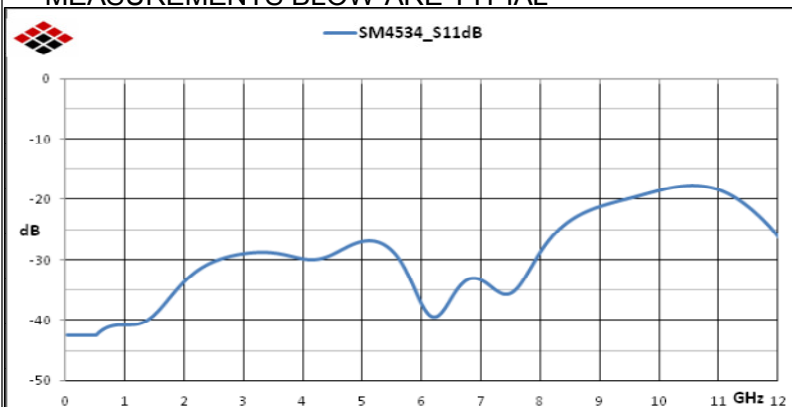

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

N M/F ADAPTER RA TRIMETAL PLATING

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM4534	A
SCALE			SHEET

ALL DIMENSIONS IN inches(MM) Typical