

SC/F - 7/16/M ADAPTER

SM4647



SPECIFICATIONS

ELECTRICAL

FREQUENCY: 0-7.5 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.25:1 MAX

MECHANICAL

MATERIALS BODY: NICKEL PLATED BRASS
MATERIALS CONTACTS BeCu,
CONTACT PLATING: Au PER MIL-G-45204
INSULATOR: TEFLON
INTERFACE: MIL-STD-348 DIN 47223
RECOMMENDED TORQUE 7-16 221 IN-LBS
DURABILITY: 500 CYCLES MIN
OPERATING TEMP: -55° TO +120° C
ROHS COMPLIANT

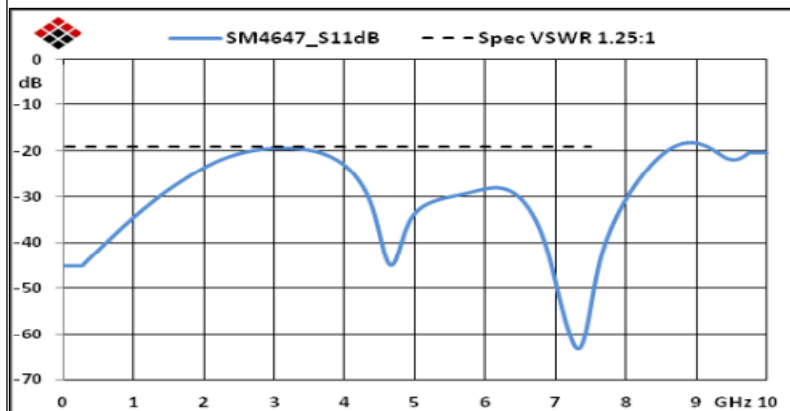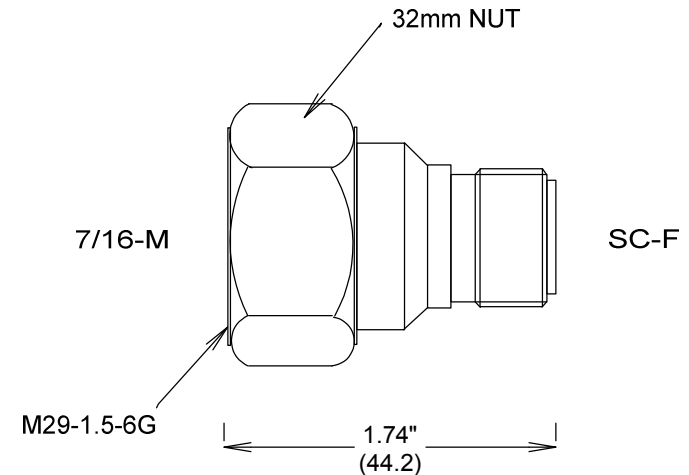

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SC/F - 7/16/M ADAPTER

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM4647	A
SCALE		SHEET	