

**N Bias Tee From 10 MHz to 3 GHz Rated To 1000 mA
And 72 Volts DC**

Electrical Specifications*

Description	Min	Typ	Max	Units
Frequency Range	0.01		3	GHz
RF Port VSWR			1.2	
Insertion Loss			1	dB
RF Input Power			5	Watts
DC Voltage			72	Volts
DC Current			1,000	mA

(Values at 25°C, sea level)

Mechanical Specifications

Temperature

Operating Range -40 to +65 deg C

Size

Length 2.9 in [73.66 mm]
Width/Dia. 0.78 in [19.81 mm]
Height 1.97 in [50.04 mm]

Connectors

RF Connector

Description	Connector
Type	N Male
Inner Conductor Material and Plating	Brass, Gold
Coupling Nut Material and Plating	Brass, Nickel
Body Material and Plating	Aluminum, Nickel

RF/DC Connector

Description	Connector
Type	N Female
Inner Conductor Material and Plating	Beryllium Copper, Gold
Outer Conductor Material and Plating	Brass, Nickel

DC Port

Description	Port
Type	N Female
Inner Conductor Material and Plating	Beryllium Copper, Gold
Outer Conductor Material and Plating	Brass, Nickel

Compliance Certifications (visit www.FairviewMicrowave.com for current document)

RoHS Compliant Yes



Features:

- RF Connector: N Male
- RF Connector Impedance: 50 Ohms
- DC/RF Connector: N Female
- DC/RF Connector Impedance: 50 Ohms
- DC Port: N Female


Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Plotted and Other Data

Notes:

- Values at 25 °C, sea level

Typical Performance Data

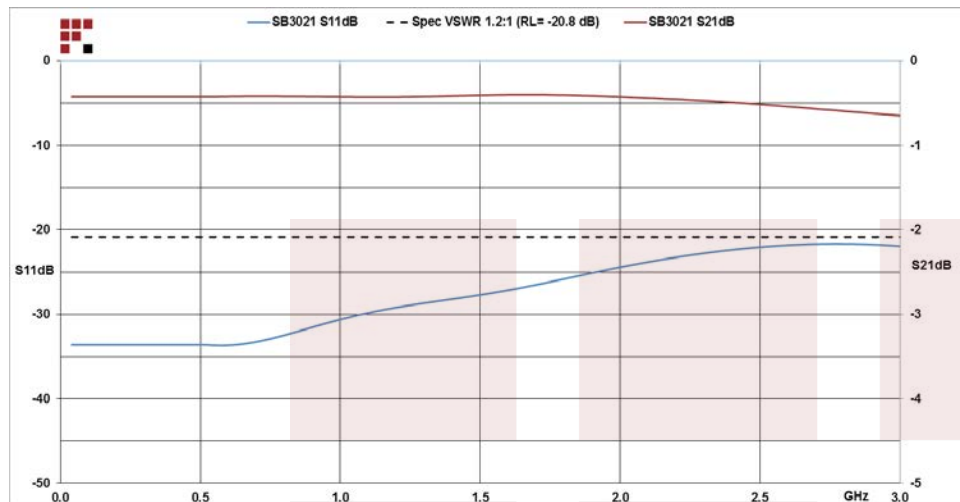


N Bias Tee From 10 MHz to 3 GHz Rated To 1000 mA And 72 Volts DC from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [N Bias Tee From 10 MHz to 3 GHz Rated To 1000 mA And 72 Volts DC SB3021](http://www.fairviewmicrowave.com/n-bias-tee-10-3-ghz-1000-ma-72-volts-dc-sb3021-p.aspx)

URL: <http://www.fairviewmicrowave.com/n-bias-tee-10-3-ghz-1000-ma-72-volts-dc-sb3021-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

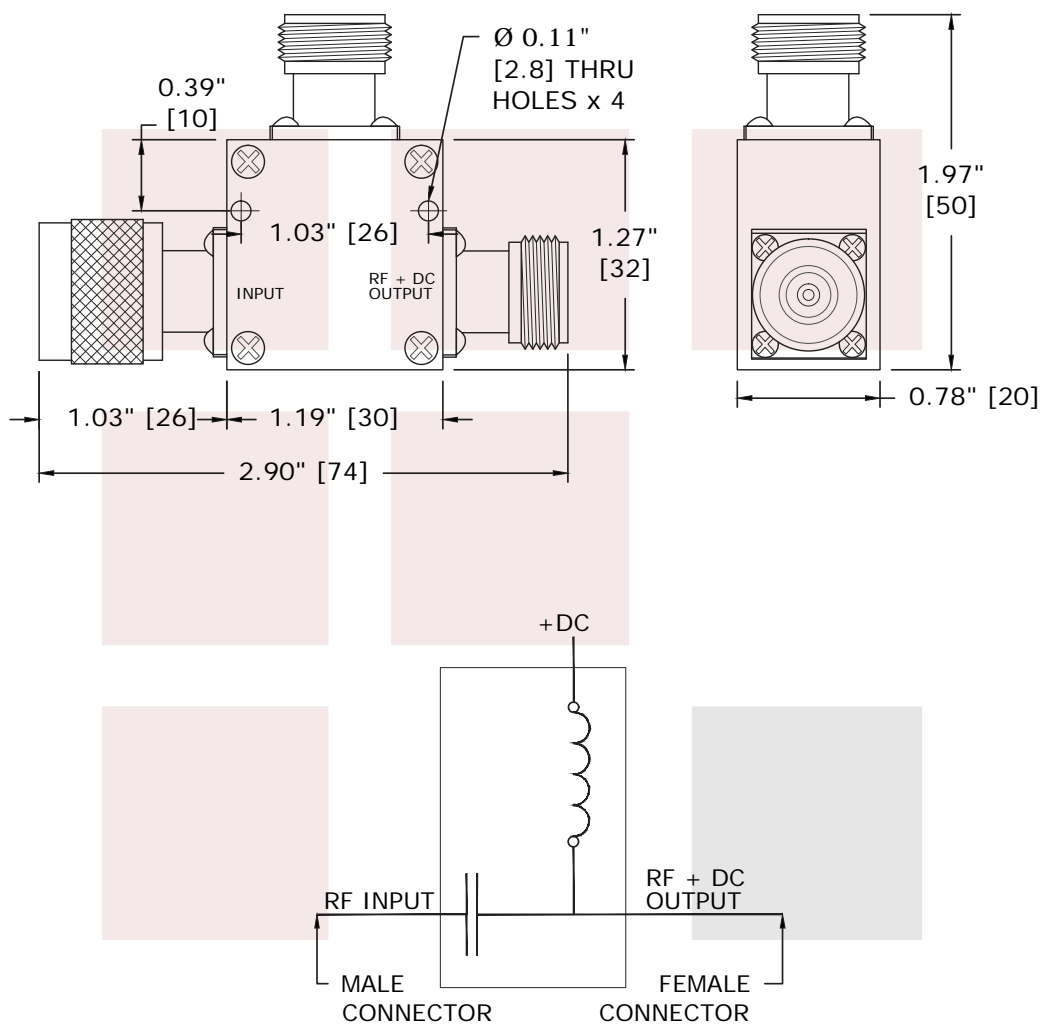

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

N Bias Tee From 10 MHz to 3 GHz Rated To 1000 mA And 72 Volts DC

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG NO

SB3021

CAGE CODE

3FKR5

CAD FILE

011415

SHEET

SCALE N/A

SIZE A

5568