
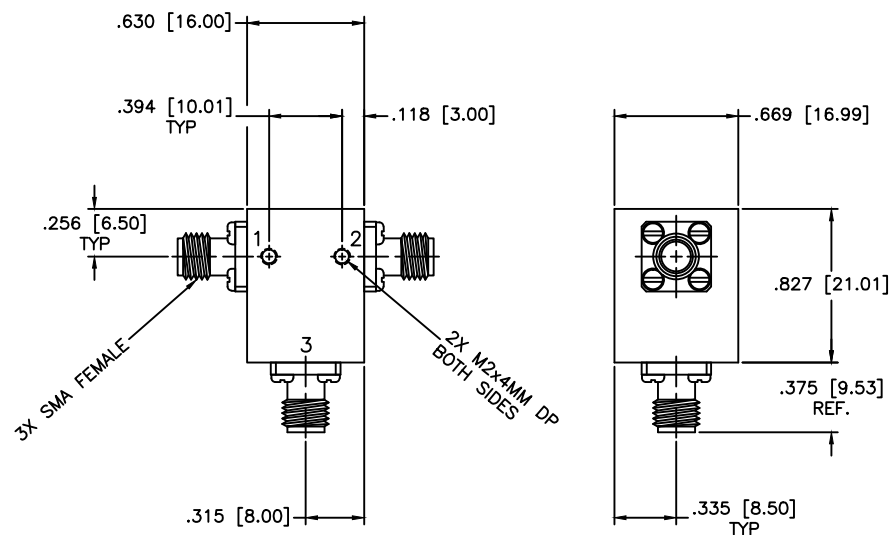


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



SPECIFICATIONS

Frequency Range: 8.5–10.5 GHz
 Isolation: 20dB Min.
 Insertion loss: 0.50dB Max.
 VSWR: 1.25:1 Max.
 Operating Temperature: –54°C to +85°C
 Power: 25W Avg, 250W Peak.

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		SHEET: N/A		
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL CIRCULATOR		
		PART NO. CS-33		
DRAWN: Paiboon Luekhamhan	DATE: 05-18-2010	THIRD ANGLE PROJECTION 		
APPROVED: T. Nguyen	DATE: 05-18-2010			
		CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 84815