


C4

SERIES BNC RF.COAXIAL CONNECTORS

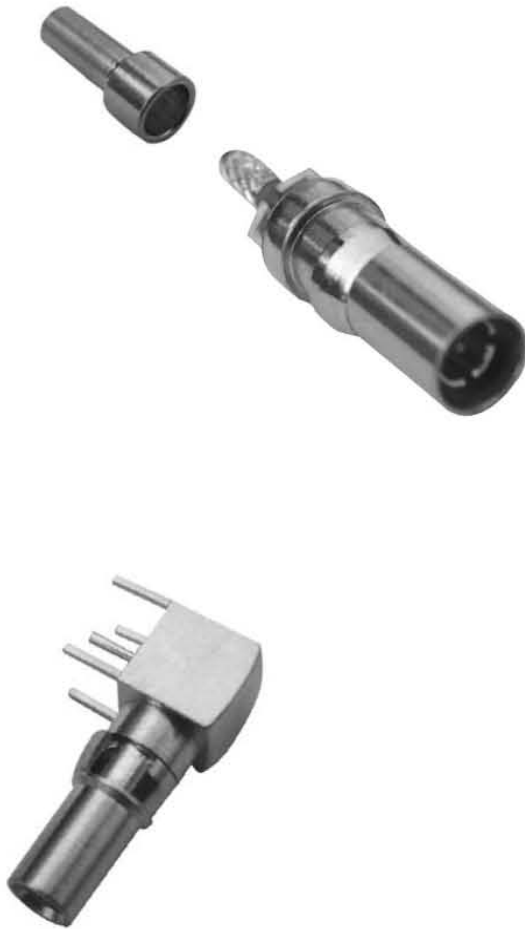


The C4 (1.0/2.3) series are snap-on coupling miniature coaxial connectors. They are developed and manufactured according to the specifications of DIN 41626. They have the characteristics of small size, high mechanical and electrical stability, are especially used in PCB connectors of mixtures of high and low frequency for radio telecommunication equipment to connect therefore circuits with therefore cable.

C4

SERIES BNC RF.COAXIAL CONNECTORS

KEY PERFORMANCE				
Temperature range		-55C~165C	Insulation resistance	≥1000M
Characteristic Impedance		50Ω	DielectricWithstanding Voltage	750V
Frequency range		0~2GHz	VSWR	VSWR 1.25 VSWR 1.45
Contact resistance	Center conductor	≤10m	Durability	500 Cycles
	Outer conductor	≤5m		

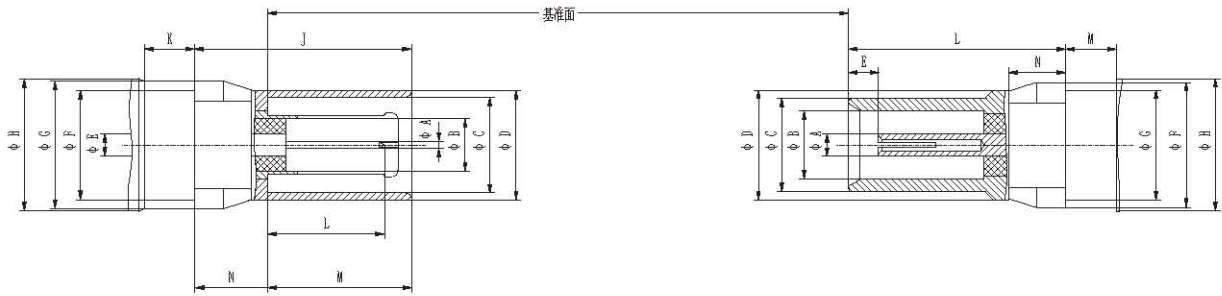


	PLUG (mm)	
	MIN	MAX
A	0.475	0.520
B	—	2.30
C	4.2	4.275
D	4.72	4.75
E	—	1.00
F	4.76	4.79
G	—	5.25
H	—	6.00
J	9.25	9.35
K	2.22	2.40
L	5.20	5.50
M	5.40	3.20
N	3.05	


	JACK (mm)	
	MIN	MAX
A	—	1.00
B	3.00	3.06
C	4.03	4.15
D	4.72	4.75
E	1.15	1.45
F	—	5.25
G	4.76	4.79
H	—	6.00
J	5.50	5.90
K	5.80	9.60
L	9.50	2.40
M	2.22	2.50
N	2.45	




C4-JWHD 等

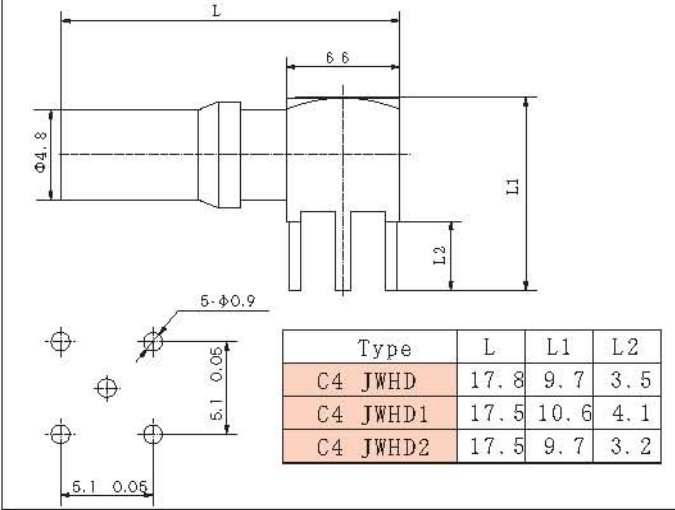


C4-J2 等

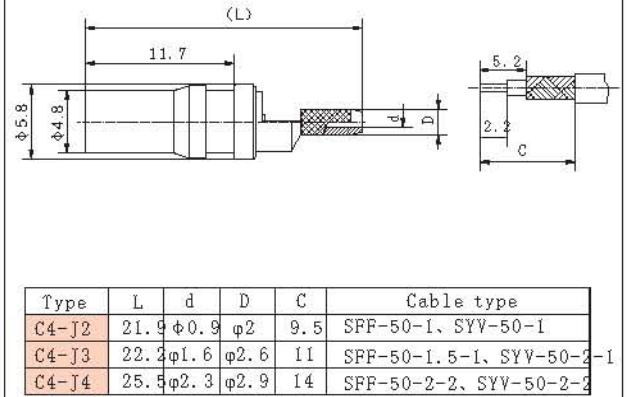


C4 KHD1

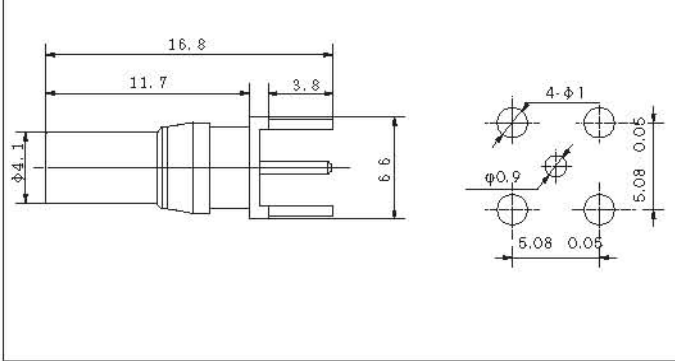


C4 JWB2

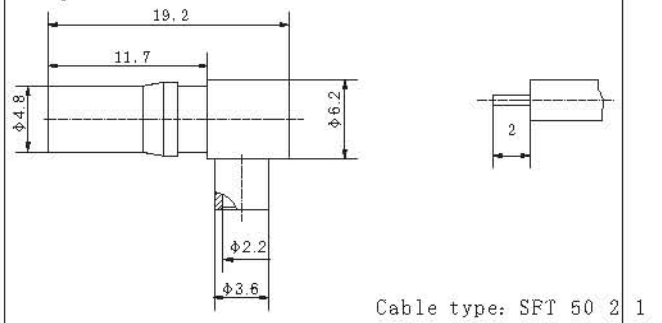


C4 KHD

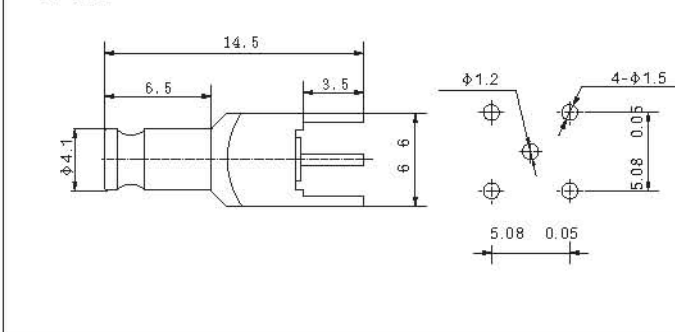


C4 JW3

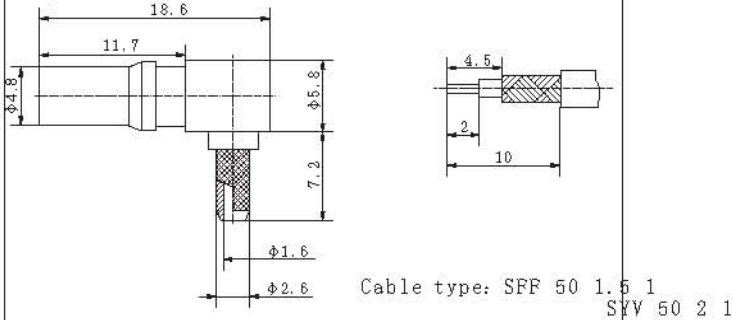

C4 KWHD

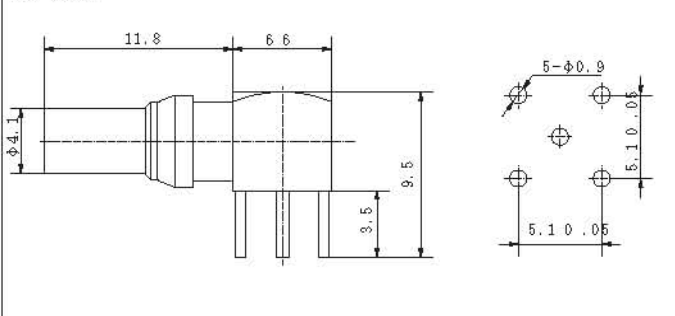


C4 J3 1

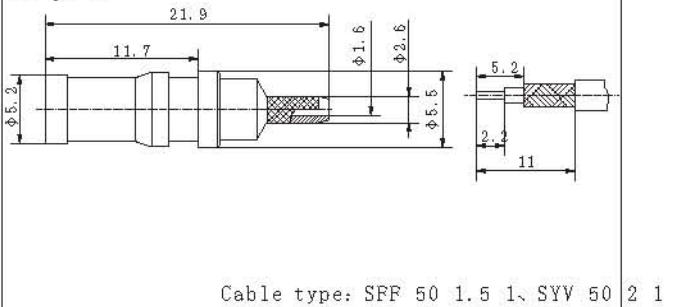




C4-K2 等

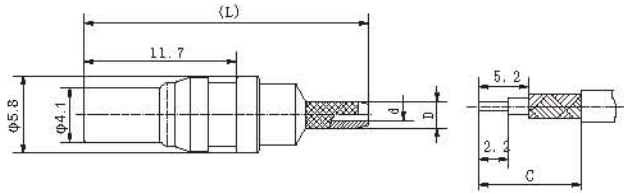


Type	L	d	D	C	Cable type
C4-K2	21.7	φ0.9	φ2	9.5	SFF 50 1、SYV 50 1
C4-K3	22.0	φ1.6	φ2.6	11	SFF 50 1.5 1、SYV 50 2

C4 KY5

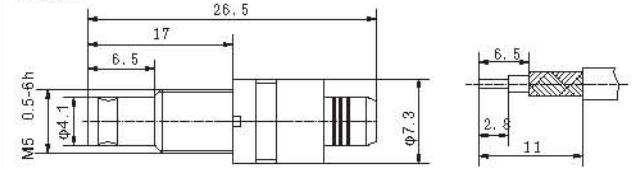


Cable type: SYV 50 3

C4 JK

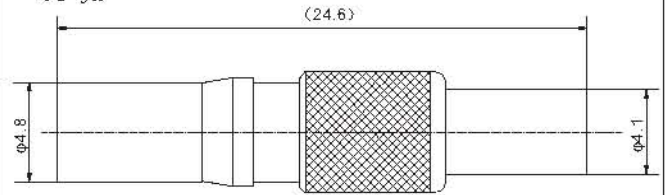


C4 KWB2

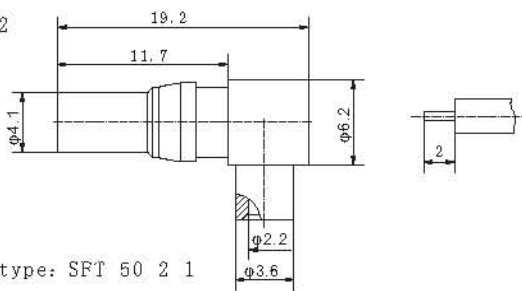


Cable type: SFT 50 2 1

C4 KK

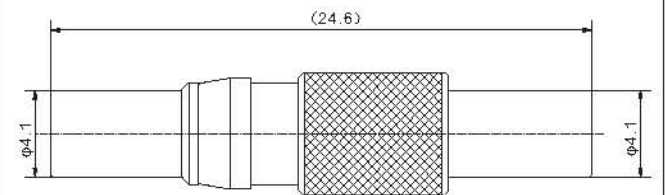


C4 KW3

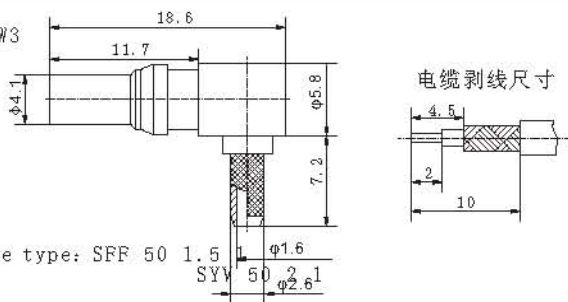


Cable type: SFF 50 1.5
SYV 50 2


电缆剥线尺寸



SMA/C4 KJ

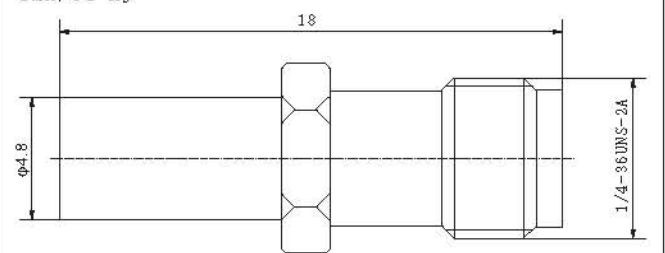

C4 K316

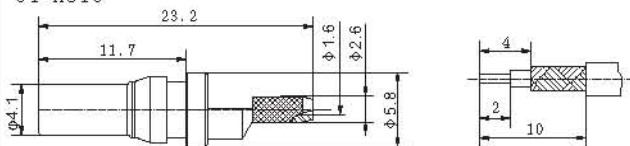

Cable type: RG316DT

SMA/C4 KK

