

Surface Mount Power Splitter/Combiner

8 Way-0° 50Ω 10 to 850 MHz

JCPS-8-850+
JCPS-8-850



CASE STYLE: BG291

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.875W max.

Pin Connections

SUM PORT	1
PORT 1	3
PORT 2	4
PORT 3	5
PORT 4	6
PORT 5	9
PORT 6	10
PORT 7	11
PORT 8	12
GROUND	2,7,8,13,14

Features

- wideband, 10 to 850 MHz
- aqueous washable
- shielded metal case
- J-leads for good solderability & strain relief

Applications

- VHF/UHF
- cellular
- instrumentation
- communication systems

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 9.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f _L -f _U																		
10-850	34	20	25	17	20	15	0.8	1.5	1.0	2.5	1.8	3.0	5	10	20	0.6	0.7	1.0


L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)						Amplitude Unbalance (dB)	Isolation (dB)				VSWR S	VSWR 1	VSWR 8
	S-1	S-2	S-3	S-4	S-6	S-8		1-2	1-7	3-4	5-7			
10.00	9.97	9.88	9.85	9.85	9.83	9.84	0.14	37.47	45.11	36.73	33.59	1.12	1.20	1.24
30.00	9.94	9.85	9.82	9.83	9.81	9.83	0.13	35.88	47.49	35.30	33.43	1.07	1.14	1.18
50.00	9.99	9.90	9.85	9.87	9.87	9.88	0.14	33.43	47.78	33.03	32.56	1.07	1.14	1.18
80.00	10.06	9.96	9.92	9.93	9.94	9.94	0.14	30.18	45.86	29.90	30.72	1.08	1.14	1.17
150.00	10.20	10.08	10.05	10.05	10.08	10.08	0.15	25.88	42.07	25.65	27.12	1.14	1.12	1.15
300.00	10.51	10.35	10.32	10.32	10.39	10.36	0.19	20.60	35.90	20.40	21.65	1.24	1.05	1.08
410.00	10.71	10.51	10.48	10.47	10.61	10.54	0.24	19.46	33.82	19.25	19.70	1.29	1.01	1.02
430.00	10.73	10.54	10.50	10.48	10.64	10.57	0.25	19.55	33.59	19.32	19.00	1.29	1.02	1.02
500.00	10.81	10.59	10.56	10.55	10.75	10.63	0.26	20.04	33.93	19.84	18.67	1.29	1.05	1.05
575.00	10.87	10.66	10.61	10.63	10.88	10.70	0.30	21.63	35.15	21.98	18.29	1.26	1.09	1.10
675.00	10.92	10.76	10.66	10.70	11.05	10.77	0.43	23.04	36.83	26.33	18.19	1.19	1.13	1.16
775.00	11.03	10.95	10.77	10.86	11.32	10.89	0.62	21.47	38.45	25.87	18.10	1.13	1.16	1.21
820.00	11.10	11.05	10.81	10.91	11.44	10.93	0.71	19.95	39.36	22.83	18.03	1.11	1.18	1.24
840.00	11.20	11.16	10.90	11.02	11.59	11.02	0.78	19.15	39.94	21.31	18.03	1.12	1.19	1.25
850.00	11.25	11.23	10.94	11.08	11.67	11.05	0.82	18.91	40.13	20.89	18.03	1.12	1.19	1.26

1. Total Loss = Insertion Loss + 9dB splitter loss.


Outline Drawing

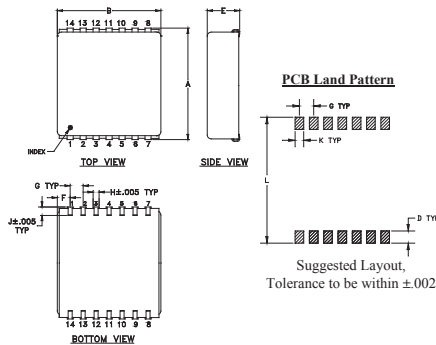

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.870	.800	--	.100	.250	.100	.100
22.10	20.32	--	2.54	6.35	2.54	2.54
H	J	K	L		wt	
.047	.065	.065	.890		grams	
1.19	1.65	1.65	22.61		4.0	

Demo Board MCL P/N: TB-134 Suggested PCB Layout (PL-037)

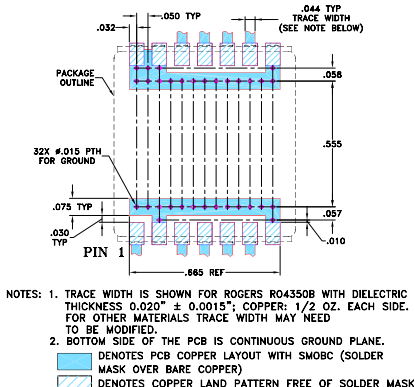

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

electrical schematic



REV. D
M151107
JCPS-8-850
WZ/TD/CP/AM
150818