

2.4mm - 2.4mm F-F ADAPTER 50GHZ

SM3008

SPECIFICATIONS

ELECTRICAL

50 OHMS

VSWR 1.10:1 MAX @ 27GHZ

VSWR 1.15:1 MAX @ 40GHZ

VSWR 1.18:1 MAX @ 50 GHZ

FREQUENCY: 0-50 GHZ

MECHANICAL

500 CYCLES MIN

INTERFACE: MIL-STD-348A

ENVIRONMENTAL

-55° C TO +125° C

MATERIALS


BODY: PASS STAINLESS STEEL

CENTER CONTACTS BeCu

CONTACT PLATING: Au PER MIL-G-45204

ROHS COMPLIANTS

MEASUREMENTS BELOW ARE TYPICAL

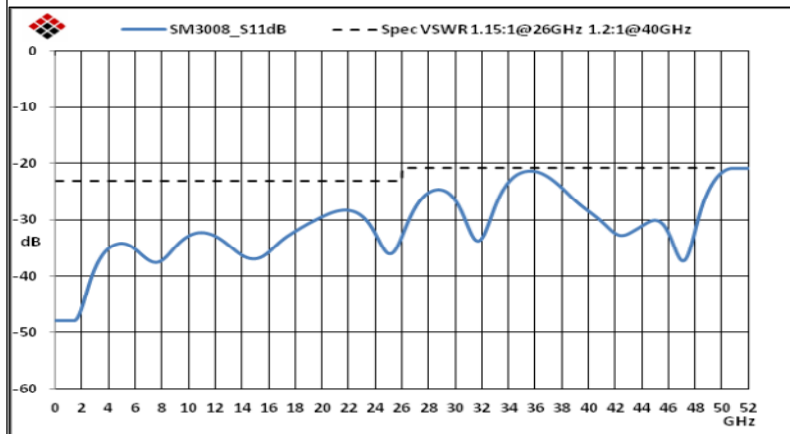

2.4mm JACK

5/16" HEX

M7.0 x .75-6g

2.4mm JACK

.852"
(21.6)

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

2.4mm - 2.4mm F-F ADAPTER 50GHZ

SIZE

A

CAGE CODE

3FKR5

DWG NO

SM3008

REV

A

SCALE

SHEET