



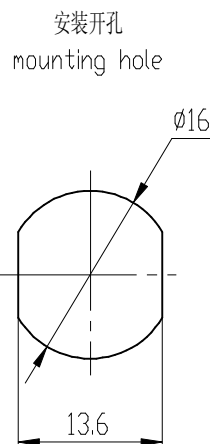


This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission.

本文件包含专有信息，没有书面许可，该信息不得以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

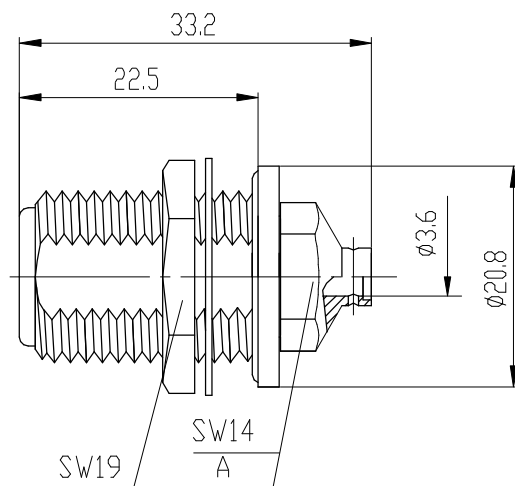

剥线尺寸
stripping dimension



产品型号 type	零件 A part A	电缆型号 cable type
N-KYB3B	黄铜,镀镍	SFT-50-3-1、RG402/U

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
 - Frequency range: DC~11GHz
 - Contact resistance
Center conductor: $\leq 1.0\ m\ \Omega$
Out conductor: $\leq 0.2\ m\ \Omega$
 - Insulation resistance: $\geq 5000M\ \Omega$
 - Insulator withstanding: 1500V
 - VSWR: ≤ 1.5
 - Durability: 500cycles
- Application: MIL-C-39012/1E

Material&Finishing

- Center contact:
Female: phosphor bronze, gold plated
- Bodies: brass, nickel plated
- Insulators: PTFE

主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~11GHz
- 接触电阻:
中心导体: $\leq 1.0\ m\ \Omega$
外导体: $\leq 0.2\ m\ \Omega$
- 绝缘电阻: $\geq 5000M\ \Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.5
- 插拔次数: 500次

执行标准: MIL-C-39012/1E

材料和镀层

- 中心接触件:
插孔: 锡磷青铜, 镀金
- 壳体: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

		SCALE
		1.5:1
	NAME	DATE
DRAWN		
CHECKED		
APPROVED		

N-KYB3B
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X± .15 ±1°
.XX± .05
.XXX±

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.