


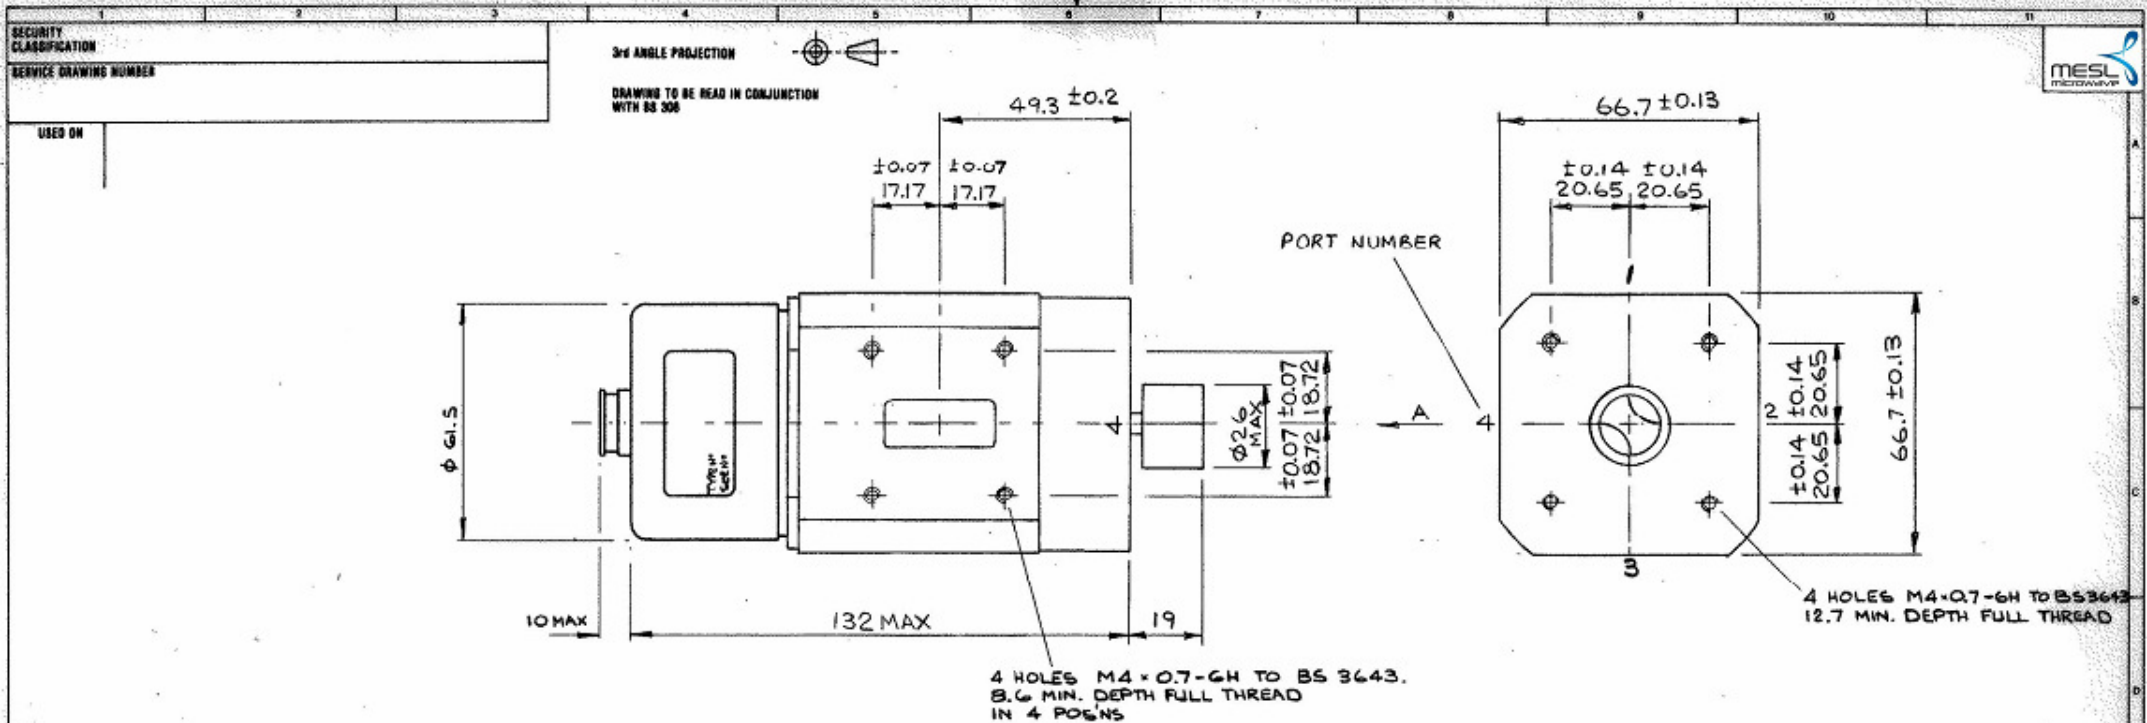

FREQUENCY RANGE
ISOLATION
INSERTION LOSS
V.S.W.R.
POWER RATING
OPERATION
TEMPERATURE RANGE
OPERATING

MATING FLANGE
CONNECTOR
FIXED

SPECIFICATION

7.05 TO 10 GHz
100 dB min.
0.01 dB MAX
1.04 : 1 MAX
350 KW PEAK, 4KW AVERAGE
MANUAL
-20°C TO +65°C
UBRS4 OR EQUIVALENT
DIN 5 PIN SOCKET



CONDITION	1	2	3	4	5
1					
2					

50		100		150		200		250	
PROB. RELEASE	ORIGINAL SCALE DO NOT SCALE PRINT	MATERIAL SWITCH BODY ALUMINIUM ALLOY	PROTECTIVE FINISH ALOCROM/200	GENERAL TOLERANCES UNLESS OTHERWISE STATED ± 0.5		MESL MICROWAVE		SECURITY CLASSIFICATION	
ENG. APP.	DIMENSIONS IN mm			FINISH TO BE UNLESS OTHERWISE STATED		RESPONSIBLE AUTHORITY		CONTRACTOR'S DRAWING NUMBER	
CHECKED	CERTIFIED AT ISSUE					TITLE		SERVICE DRAWING NUMBER	
AW						OUTLINE AND SPECIFICATION MWS 15-42/E P		A2/5814	
					REF. FEATURE SIZE QTY. SYMBOL POS. TOL. ISSUE DATE MOD. No.				
					A DR14136				
					SHEET 1 OF 1 SHEETS				