

D
C
B
A

D
C
B
A


4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

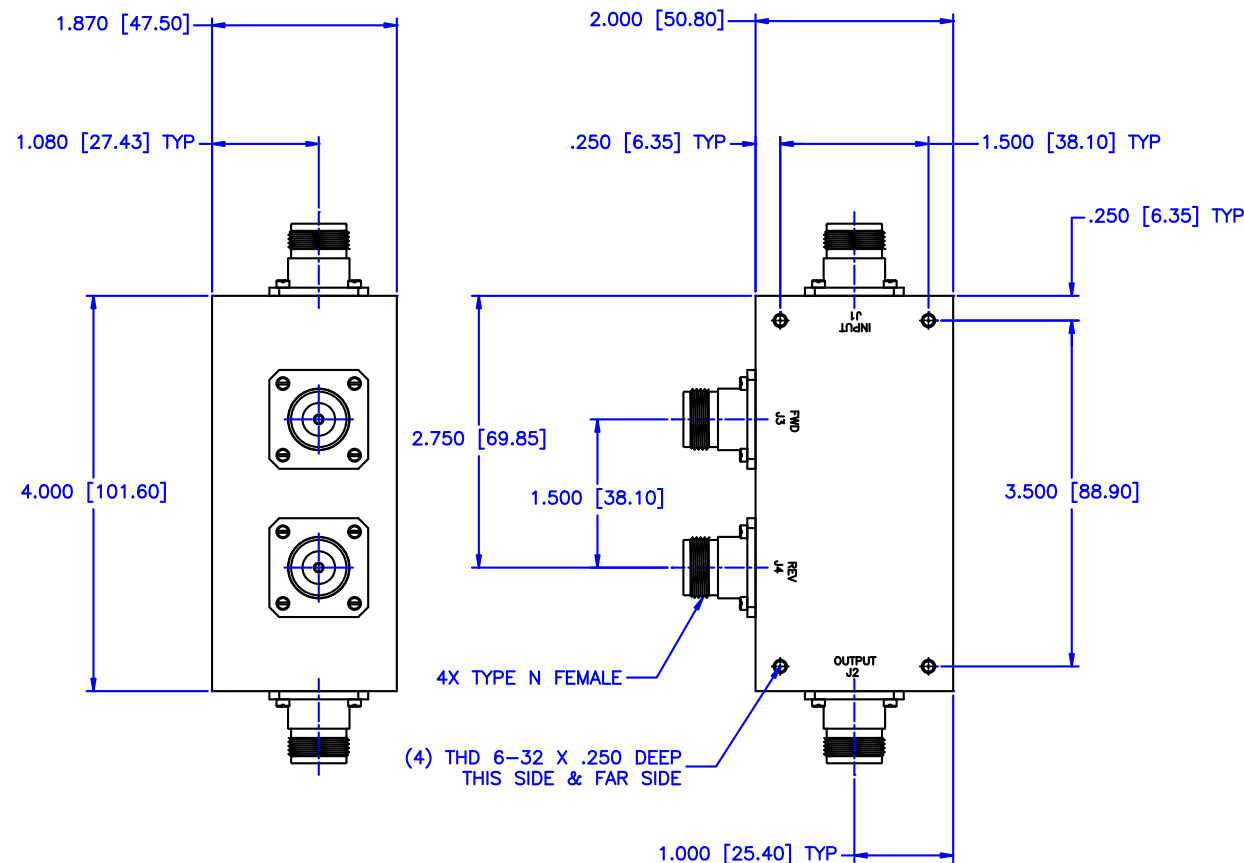

SPECIFICATIONS

FREQUENCY RANGE: 10-100 MHz
 FREQUENCY SENSITIVITY: $\pm 0.50\text{dB}$
 INSERTION LOSS: 0.2dB Max.
 DIRECTIVITY: 25dB Min.
 VSWR PRIME LINE: 1.10:1 Max.
 POWER: 500 Watts

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 03-27-1999		DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER		
APPROVED: T. Nguyen DATE: 03-27-1999		PART NO.: HDL-12-40		
CAGE CODE: OD2L5		SIZE: C	REV: N/A	DWG NO.: 81248
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		

4

3

2

1