

| REVISIONS |     |                  |  | DATE   | APPROVED |
|-----------|-----|------------------|--|--------|----------|
| 2         | REV | DESCRIPTION      |  | 8/7/08 |          |
|           |     | ORIGINAL RELEASE |  |        |          |

### Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

### Specifications:

Frequency Range: 2.0 to 8.0 GHz  
Gain: 30dB Typ.  
Gain Flatness: +/-1.5dB Max.  
Noise Figure: 2.0dB Typ.  
OP1dB: 20dBm Min.  
VSWR Input/Output: 2.0:1 Max.  
DC Voltage Supply: +12 to +15VDC  
DC Current Draw: 300mA Max.

### Features:

Internal Voltage Regulation  
Unconditional Stability  
Standard Operating Temperature -20 to +70 Deg. C

### Available Options:


Various Package types  
Various Connector types  
Temperature Compensation  
Hermetic Sealing  
Gain and Phase Matching  
MIL-STD-883 Screening Available

### Environmental Ratings:


Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C (Available)  
Humidity: MIL-STD-202F, METHOD 103B COND B.  
Shock: MIL-STD-202F, METHOD 213B COND B.  
Altitude: MIL-STD-202F, METHOD 105C COND B.  
Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

### PE2 HOUSING WITH CARRIER

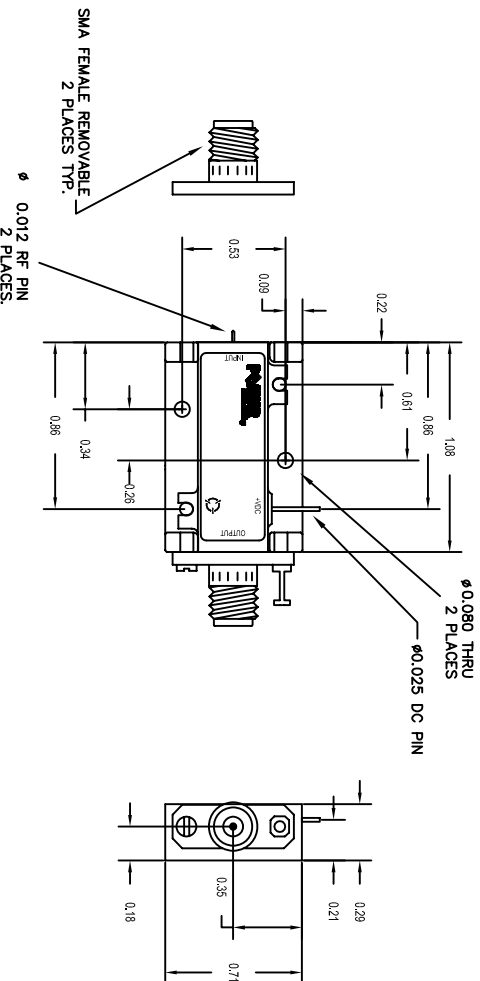

### PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

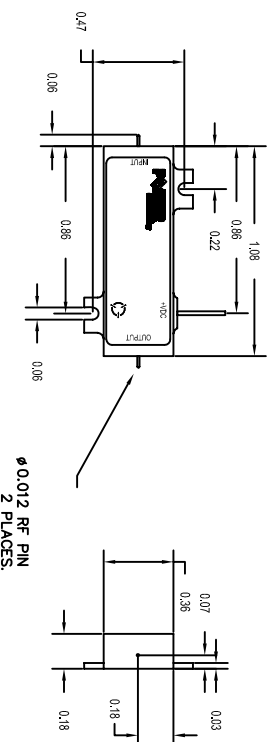

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOLERANCES ARE:  
FRACTIONS DECIMALS ANGLES  
± .XX ± 0.010 ±  
.XXX ± 0.005

| PART NO.                    |  | DATE                        |  | TITLE                       |  |
|-----------------------------|--|-----------------------------|--|-----------------------------|--|
| MATERIAL:                   |  | APPROVALS                   |  | DATE                        |  |
| 6061-T6 Aluminum            |  | K. Mason                    |  | 8/21/08                     |  |
| FINISH:                     |  | TOLERANCES ARE:             |  | FRACTIONS DECIMALS ANGLES   |  |
| Gold Plate over Nickel      |  | ±                           |  | ±                           |  |
| DO NOT SCALE DRAWING        |  | ±                           |  | ±                           |  |
| PE2-30-2P08R0-2R0-22-12-SFF |  | PE2-30-2P08R0-2R0-22-12-SFF |  | PE2-30-2P08R0-2R0-22-12-SFF |  |
| B 1LK53                     |  | WEB - MODEL                 |  | A                           |  |
| N/A                         |  | 1 OF 1                      |  |                             |  |