


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
NC	INITIAL RELEASE		

SPECIFICATIONS:

FREQUENCY RANGE:	0.5 TO 18.0 GHZ
VSWR:	0.5-18.0 GHZ -----2.0:1 MAX
INSERTION LOSS:	0.5-18.0 GHZ -----3.0 dB MAX
ISOLATION:	60 DB MIN
OPERATING TEMP:	-55° TO +100° C
STORAGE TEMP:	-65° TO +125°C
SWITCHING SPEED:	25 nSEC MAX
DC POWER:	+5V @ 100 mA MAX
	-15V @ 75 mA MAX
CONTROL:	TTL LOW - ISOLATION
	TTL HIGH - INSERTION LOSS

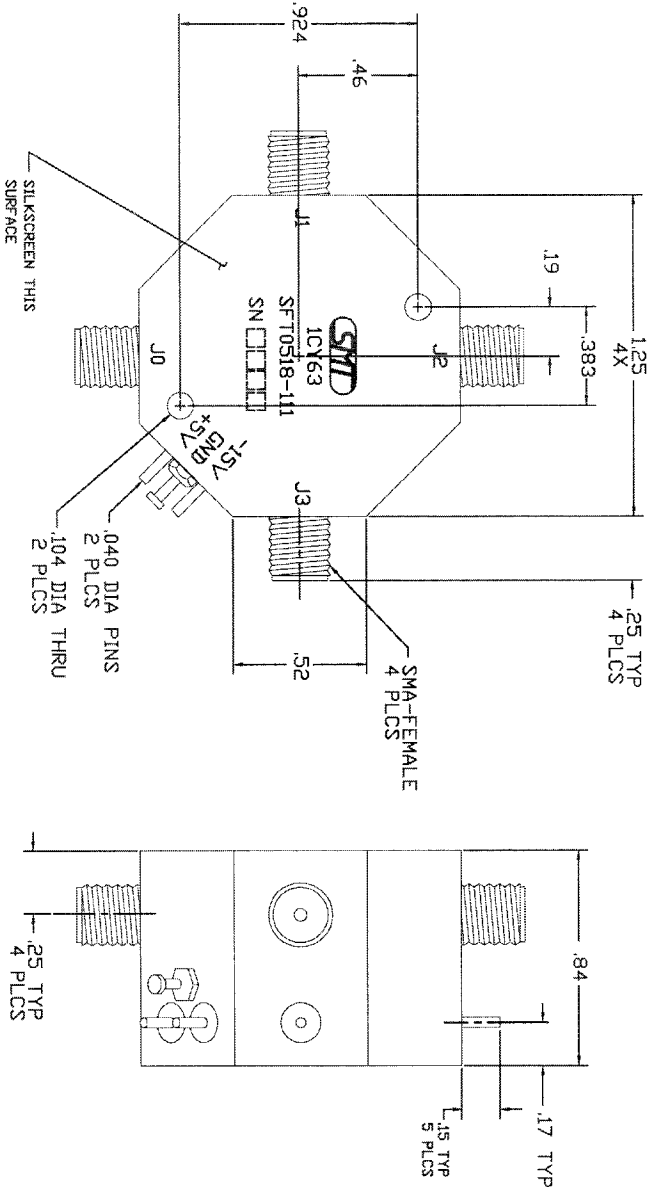

QTY	FSCM	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
REQD NO.				

PARTS LIST

FRACTIONS DECIMALS ANGLES	APPROVALS	DATE	SIERRA MICROWAVE TECHNOLOGY	
± .XXX .02 ±	DRAWN		OUTLINE FOR SFT0518-111	
MATERIAL .XXX ± .010	CHECKED			
FINISH	ISSUED		SIZE FSCM NO. 1CY63	DWG. NO. 605-0354-001
			SCALE	SHEET

604-0047-001	SFT0518-111	REVISIONS
NEXT ASSY	USED ON	
APPLICATION		