


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

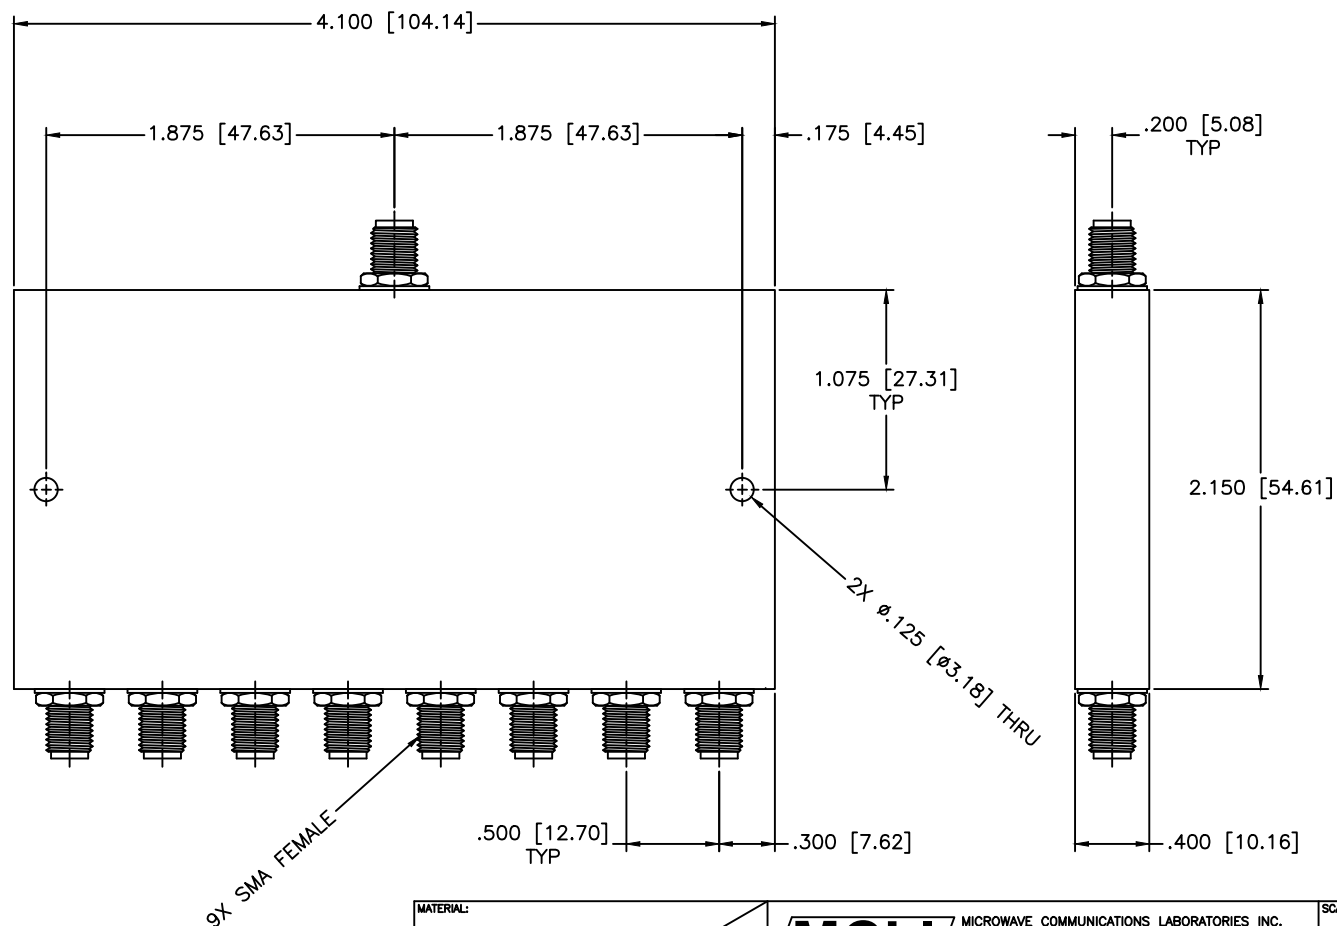

SPECIFICATIONS

Frequency Range: 5–2000 MHz
 Isolation: 16dB Min.
 VSWR: 1.70:1 Max.
 Insertion Loss: 4.5dB Max.
 Amplitude Balance: ± 1.0 dB Max.
 Phase Balance: ± 10 Deg. Max.
 Power: 1 Watt Max.


MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhimhan DATE: 01-08-1998 APPROVED: T. Nguyen DATE: 01-08-1998		DRAWING TITLE: 8-WAY POWER DIVIDER		
		PART NO.: PL8-15 CAGE CODE: OD2L5 SIZE: A REV: N/A DWG NO.: 83771 DO NOT SCALE THE DRAWING		

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
<http://WWW.MCLI.COM>

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR (mm) (MILLIMETERS)
 FRACTIONS: $\pm 1/64$
 DECIMALS: $\pm .01 \pm .005$
 ANGLE: $\pm 1/2^\circ$

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)



THIRD ANGLE PROJECTION