

D
C
B
A

D
C
B
A


4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

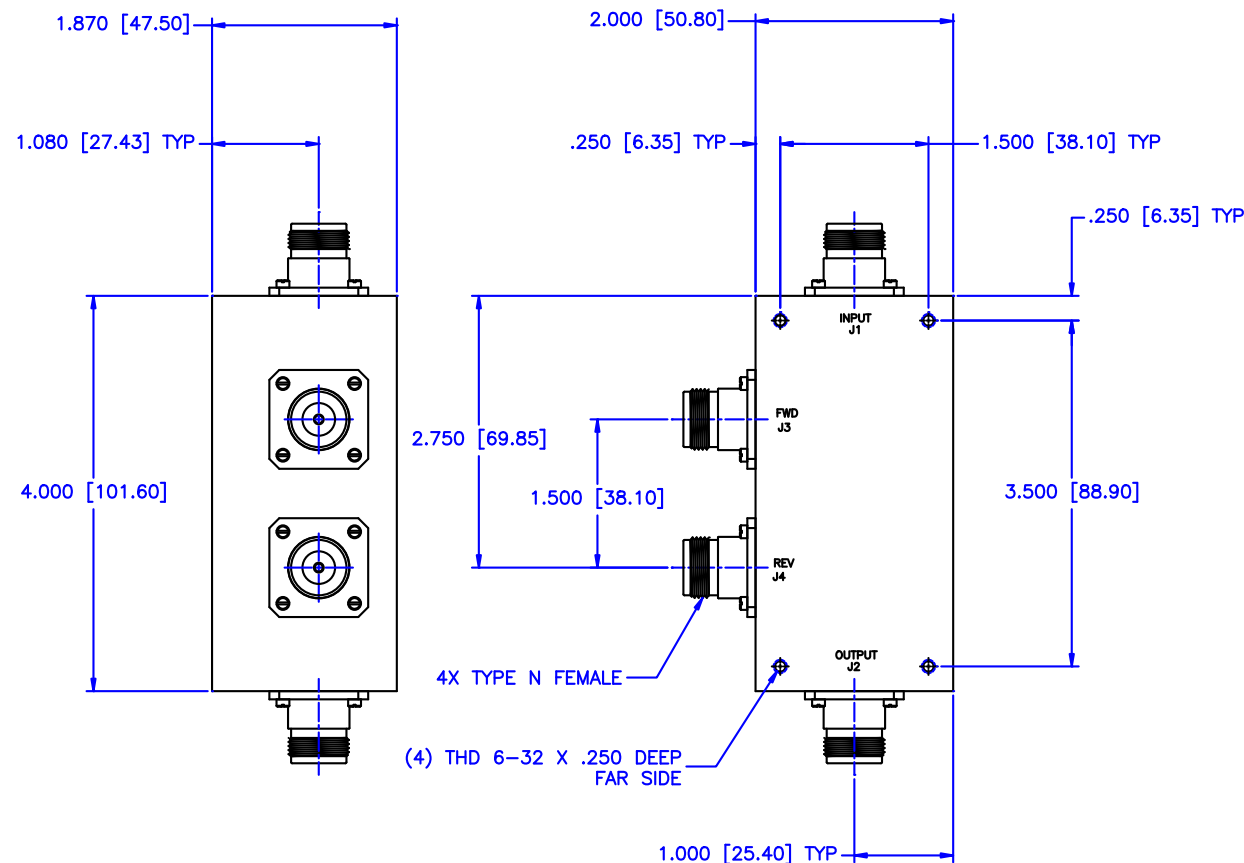

SPECIFICATIONS

FREQUENCY RANGE: 1-30 MHz
 COUPLING: 40dB $\pm$ 1.0dB Nom.
 FLATNESS: $\pm$ 0.25dB Max.
 INSERTION LOSS: 1.5dB Max.
 DIRECTIVITY: 20dB Min.
 VSWR PRIME LINE: 1.15:1 Max.
 POWER: 100 Watts

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm$ 1/64 DECIMALS: $\pm$ 0.01 $\pm$ 0.005 ANGLE: $\pm$ 1/2°		SHEET: N/A
DRAWN: Paiboon Luekhamthan DATE: 08-05-2011		DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER		
APPROVED: T. Nguyen DATE: 08-05-2011		PART NO.: HDL-23-40		
CAGE CODE: OD2L5		SIZE: C	REV: N/A	DWG NO.: 85806
		DO NOT SCALE THE DRAWING		

4

3

2

1