



75 Ohm BNC Female Bulkhead Mount Connector Solder
Attachment Solder Cup Terminal, .410 inch D Hole

TECHNICAL DATA SHEET

PE4619

Configuration

Connector	BNC Female
Connector Interface Type	Solder Cup
Attachment Method (Shield/Contact)	Solder
Body Style	Straight
Mount Method	Bulkhead

Electrical Specifications

Frequency Range	DC to 1,000 MHz
Impedance	75 Ohms
Maximum Operating Voltage	500 Volts

Mechanical Specifications

Temperature

Operating Range	-65 to +165 deg C
-----------------	-------------------

Size

Length	0.933 in [23.7 mm]
Width/Dia.	0.491 in [12.47 mm]
Weight	0.02 lbs [9.07 g]

Connector

Type	BNC Female
Contact Material and Plating	Brass, Gold
Contact Plating Specification	30μ in. minimum
Body Material and Plating	Brass, Nickel
Body Plating Specification	100μ in. minimum
Dielectric Type	Teflon


Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	
REACH Compliant	06/18/2012

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm BNC Female Bulkhead Mount Connector Solder Attachment Solder Cup Terminal, .410 inch D Hole PE4619](#)

PE4619 CAD Drawing

75 Ohm BNC Female Bulkhead Mount Connector Solder
Attachment Solder Cup Terminal, .410 inch D Hole

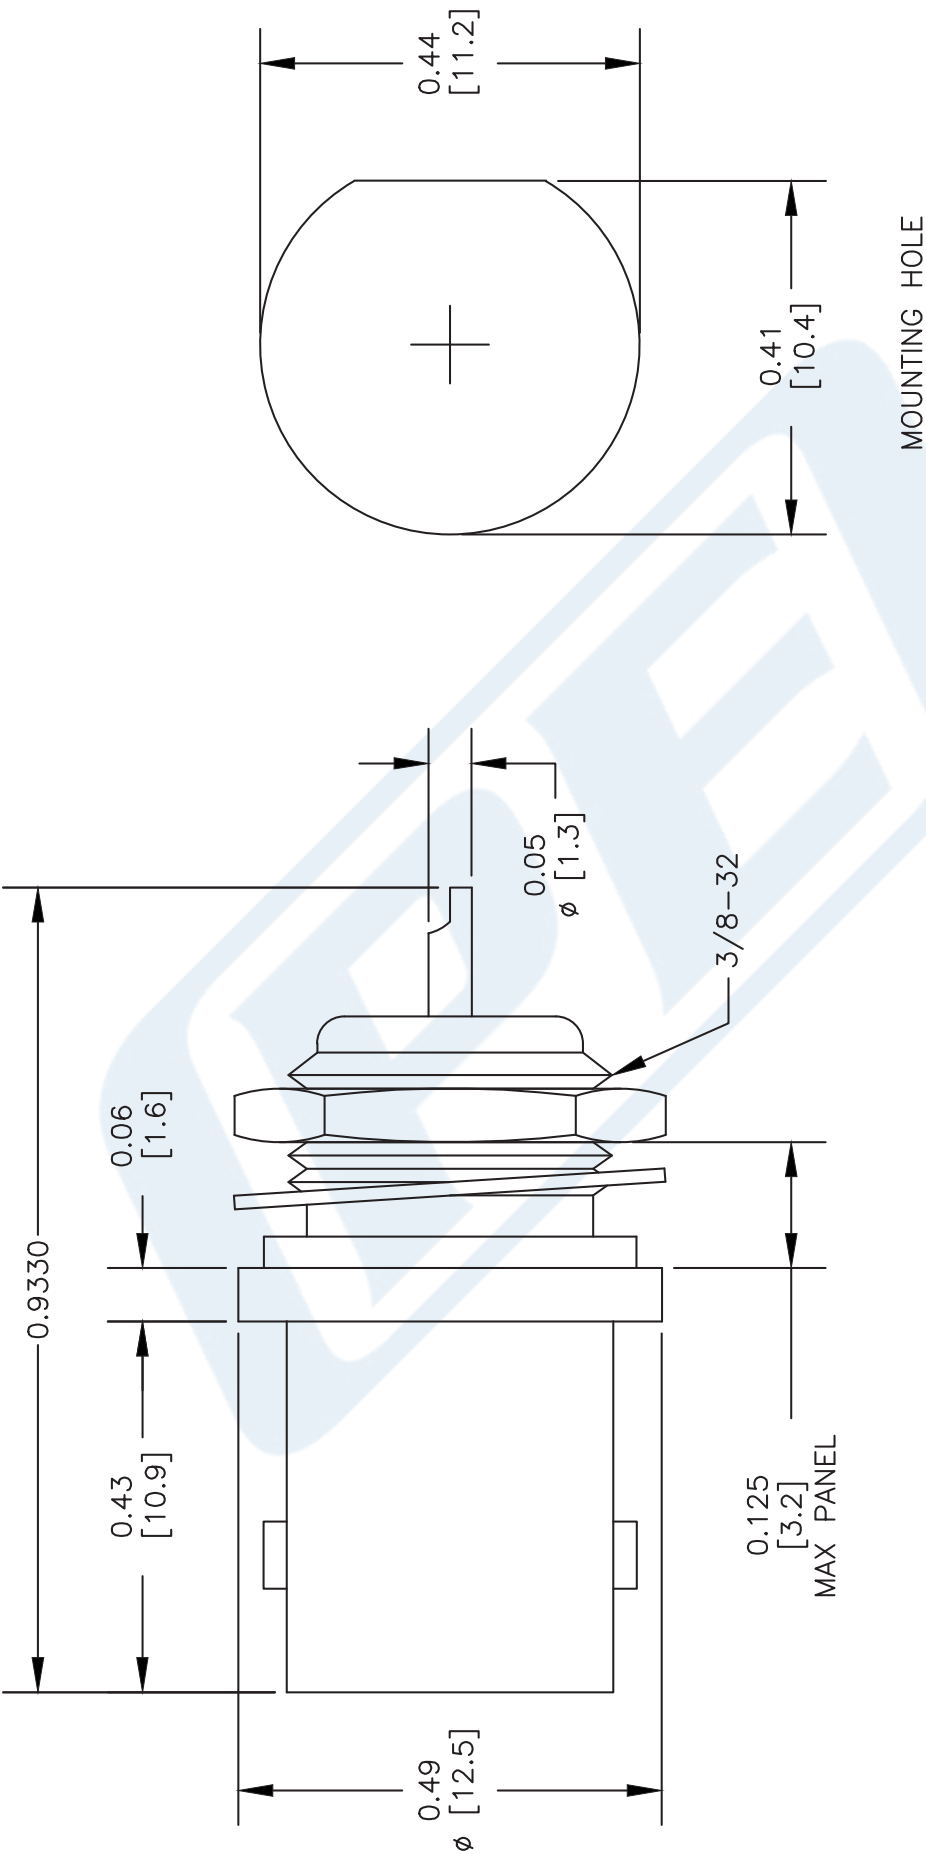

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE4619

FSCM NO. 53919

127

SIZE A

SCALE N/A

CAD FILE 052902

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com