


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

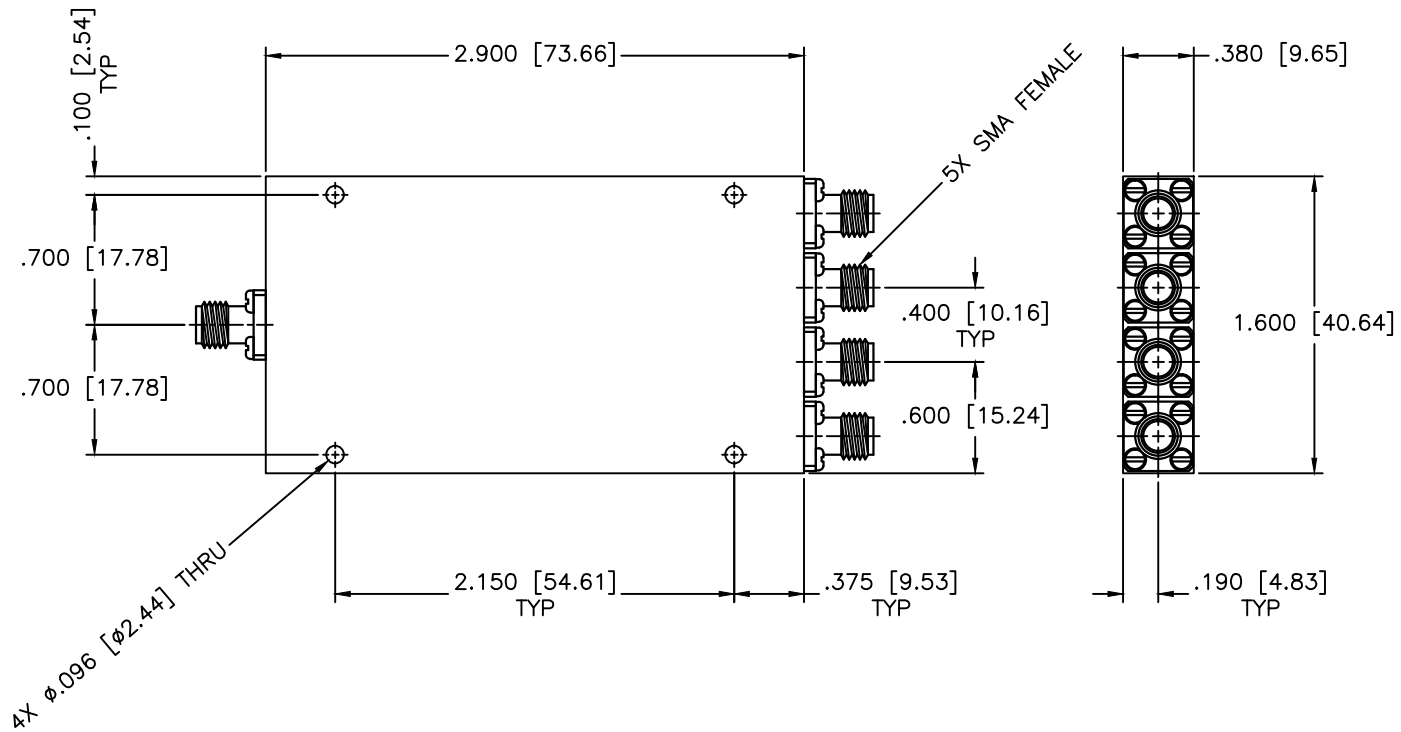

SPECIFICATIONS

Frequency Range: 2–18 GHz
 Insertion Loss: 2.3dB Max.
 Isolation: 18dB Min.
 VSWR In/Out: 1.50:1/1.40:1 Max.
 Phase Balance: ± 10 Deg. Max.
 Amplitude Balance: ± 0.8 dB Max.
 Power: 20W (Load vswr@1.2)

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 10-04-2006		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 4-WAY POWER DIVIDER	
				PART NO. PS4-11SP	
APPROVED: T. Nguyen DATE: 10-04-2006		CAGE CODE: OD2L5 THIRD ANGLE PROJECTION		SIZE: A	REV: N/A
				DO NOT SCALE THE DRAWING	
				DWG NO. 82672	