


C-114 & C-115 BI-DIRECTIONAL COUPLERS

TECHNICAL FEATURE

FEATURES

- 5 - 500 MHz
- Multi-octave Range
- High Directivity
- Low Insertion Loss
- TO-5 Header

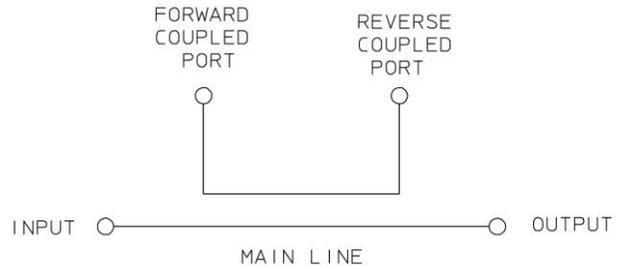

PRINCIPAL SPECIFICATIONS

Model Number	Frequency Range, MHz	Performance Bandwidth, MHz	□ Coupling Value, dB, Nom.	Frequency Sensitivity, dB, Max.	Directivity, dB, Min.	*Insertion Loss, dB, Max.	VSWR Max.
C-114	5 - 500	10 - 200	10 ±1.0	± 0.5	20	0.6	1.3:1
		5 - 500	10 ±1.0	± 0.7	15	1.0	1.5:1
C-115	5 - 500	10 - 200	20 ±1.0	± 0.5	20	0.6	1.3:1
		5 - 500	20 ±1.0	± 0.7	15	1.0	1.5:1

□ Coupling is Referenced to the Input


* Insertion Loss excludes insertion loss

GENERAL SPECIFICATIONS


Impedance: 50 Ω nom.
 CW Input: 1 W max.
 Weight, nominal: 0.07 oz (2 g)
 Operating Temperature: -55° to +85°C

General Notes:


1. The C-114 and C-115 models are bi-directional couplers comprising four-port networks.
2. All ports are accessible permitting external use of the fourth port for reflected signal sampling.
3. Each model has been designed for wide bandwidth, minimum size and low cost.

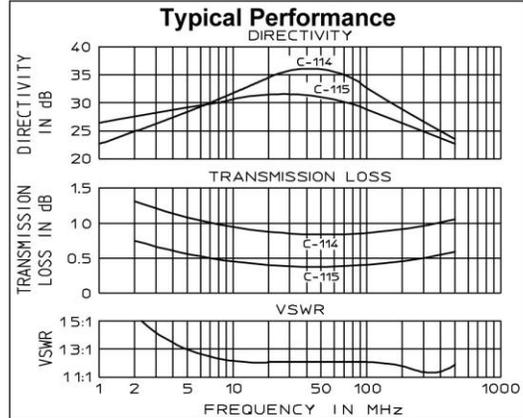

Package Outline

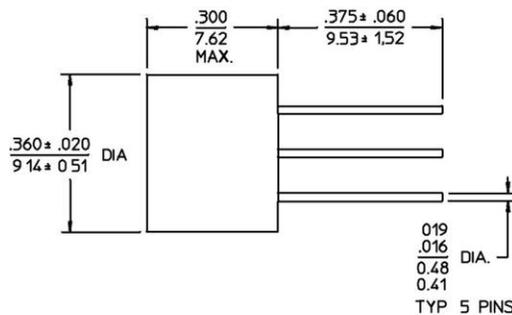

NOTES: 1. Tolerance on 3 place decimals ±.010(.25) except as noted.
 2. Dimensions in inches over millimeters.

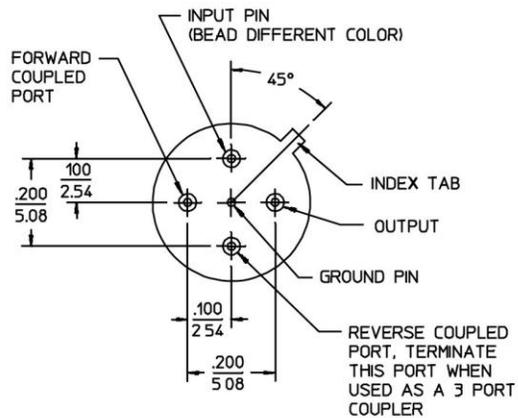

24Apr96

Crane Aerospace & Electronics
 Microwave Solutions – Merrimac Industries
 41 Fairfield Place, West Caldwell, NJ 07006
 + 1.973.575.1300 ext. 1309 • mw@crane-eg.com
www.craneeae.com/mw



C114C115.doc. This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors.
 We reserve the right to make changes in products or specifications without notice. Copyright © 2013 Crane Electronics, Inc. All rights reserved.