


※ 型号描述 How to Order

XB-WCDD-□□□-□□□-□□□

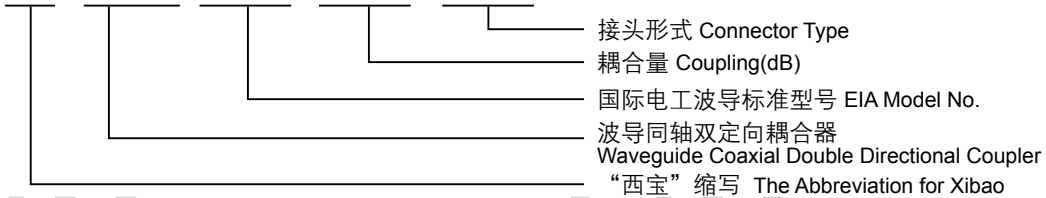

※ 型号及指标 Model & Specifications

	频率范围 Freq (GHz)	带宽 $\Delta F/F$ Bandwidth	法兰 Flange	耦合量 Coupling (dB)	方向性 Directivity (dB)	驻波 VSWR Main	接头 Connector	尺寸 A Length (mm)
XB-WCDD284-□□	2.60~3.95	15%	FDP/FDM	30 ± 2	≥ 18dB	≤ 1.08	N-50KK	150
				40 ± 2.5				
				50 ± 3				
XB-WCDD229-□□	3.22~4.90	15%	FDP/FDM	30 ± 2	≥ 18dB	≤ 1.08	N-50KK	120
				40 ± 2.5				
				50 ± 3				
XB-WCDD187-□□	3.94~5.99	15%	FDP/FDM	30 ± 2	≥ 18dB	≤ 1.08	N-50KK	100
				40 ± 2.5				
				50 ± 3				
XB-WCDD159-□□	4.64~7.05	15%	FDP/FDM	30 ± 2	≥ 18dB	≤ 1.08	N-50KK	90
				40 ± 2.5				
				50 ± 3				
XB-WCDD137-□□	5.38~8.17	15%	FDP/FDM	30 ± 2	≥ 18dB	≤ 1.08	N-50KK	80
				40 ± 2.5				
				50 ± 3				

※ 以上只是常规产品，其它品种的频率覆盖范围可从 1.45~110GHz，波导型号可从 WR510 (BJ18) ~WR10 (BJ900)

※ Other Products: F=1.45~110GHz, Waveguide WR510 (BJ18)~WR10 (BJ900)